


HOSEBED CAPACITIES

1	- 400' OF 1.50" HOSE
2	- 250' OF 1.50" HOSE
3	- 800' OF 3.00" HOSE
4	- 800' OF 3.00" HOSE
5	- 200' OF 2.50" HOSE

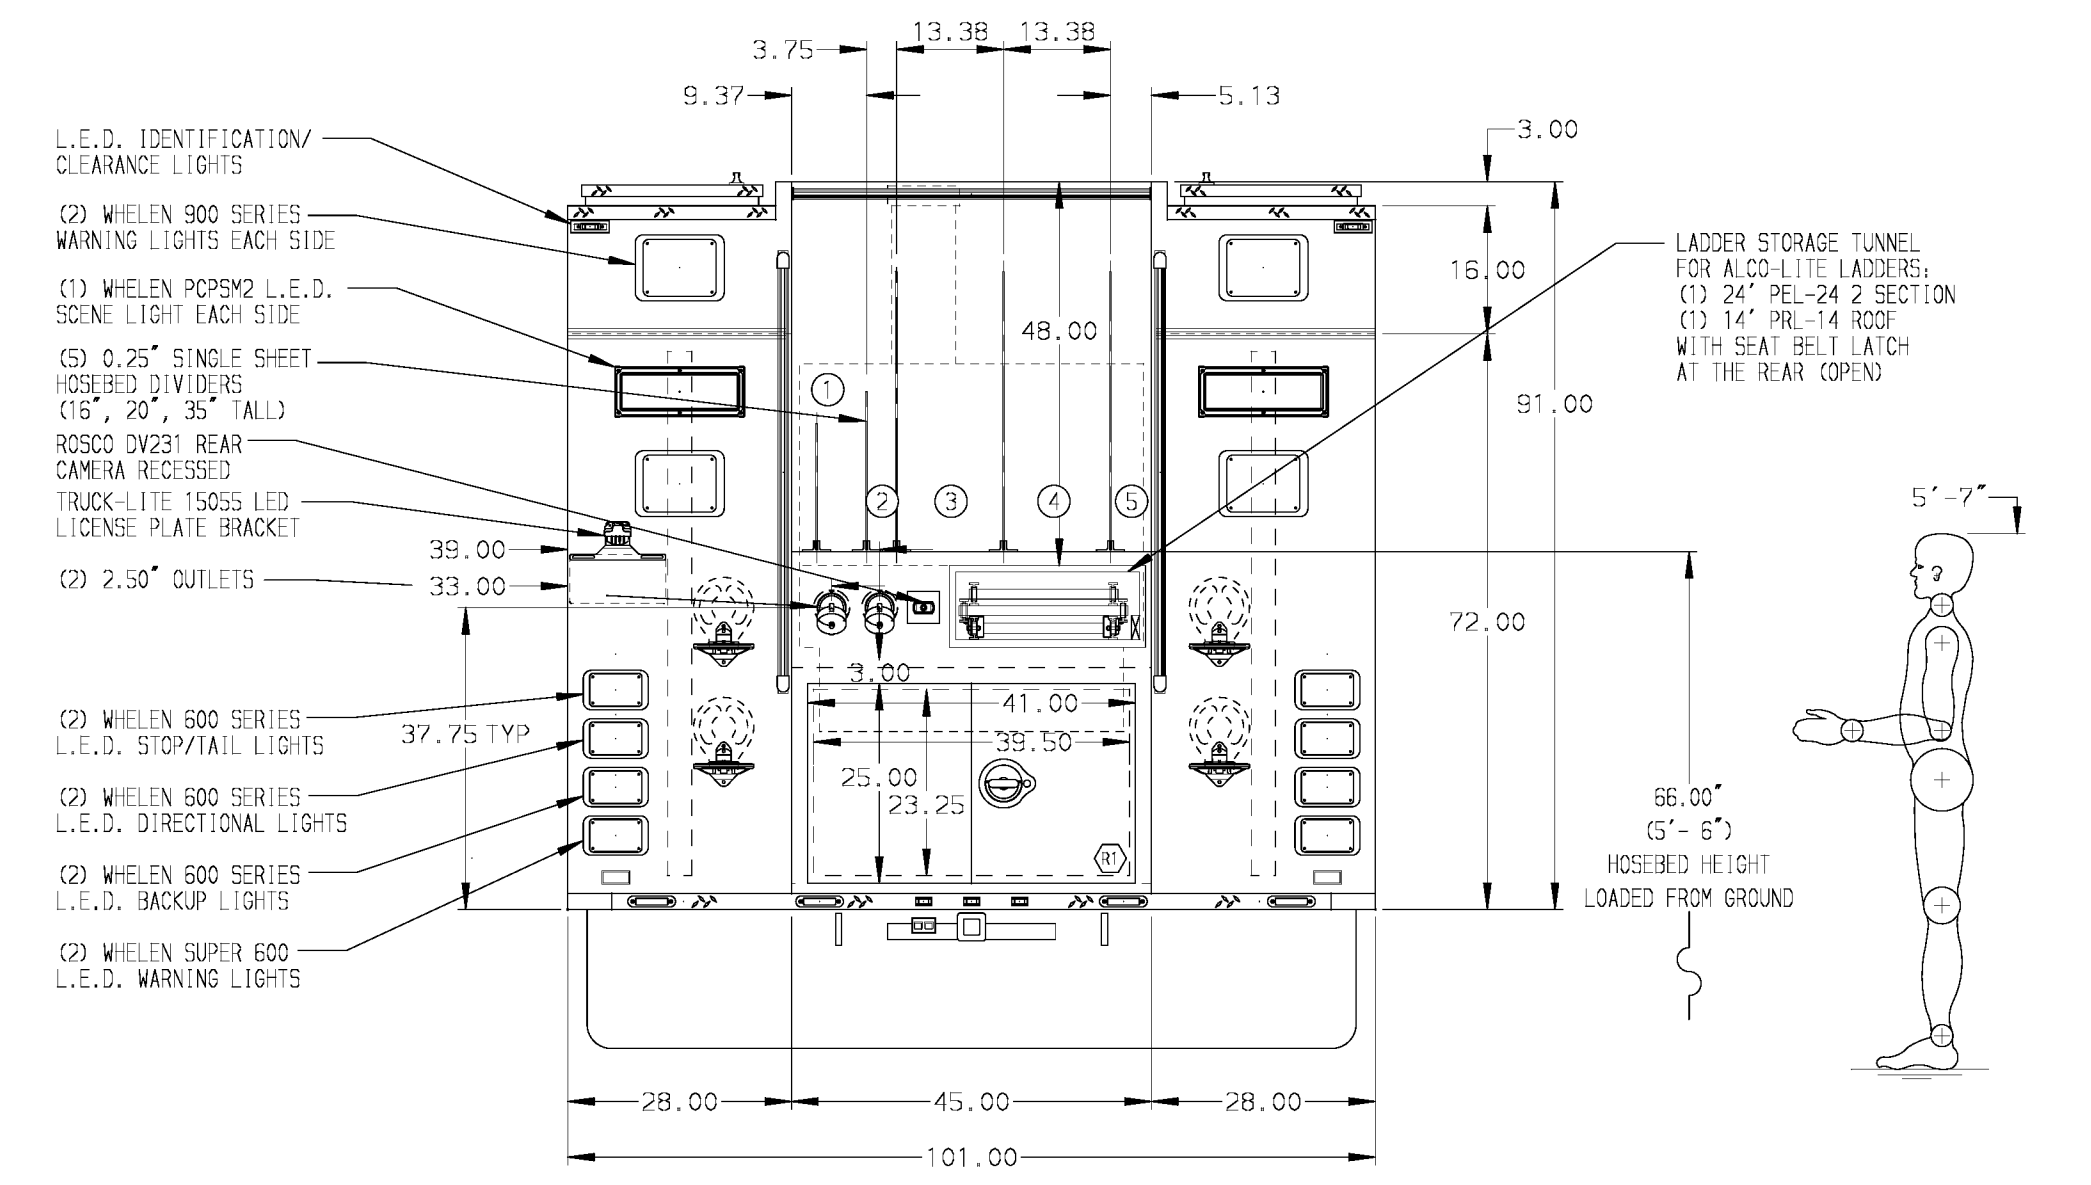

STAINLESS STEEL BODY

MAXIMUM O.A.L. 398"

MAXIMUM O.A.H. 120"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- PIERCE LOGO MUDFLAPS FRONT AND REAR
- AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DRIVERS SIDE PUMP PANEL
- ANCHOR PLATE FOR NEDERMAN EXHAUST SYSTEM LOCATION xxx18dxxx
- 10,000 LB WAIN JEN TO WINCH KIT
- STAINLESS STEEL RUB RAILS ON SIDES OF BODY
- REMOVABLE FENDERS LINER ON BODY
- 10" 701 FRESNO DAD-SAFETY LADDER SHIPPED LOOSE
- 10" DAD-SAFETY LADDER & MOUNTING CLIPS PROVIDED BY FIRE DEPARTMENT
- GROTE BLIND SPOT CONVEX MIRROR LOCATED AT PICK-UP
- SUB FEED BREAKER PANEL BOX IN COMPARTMENT D3

REV	DATE	BY	CH	ARROW-XT	CHASSIS DATA	TITLE	FOR	DWG NO.
02DEC15	AMI	TWH	MAKE		1250-D-500P 184" HDRP BODY, LADDER TUNNEL THRU TANK	KENTLAND VOLUNTEER FIRE DEPARTMENT LANDOVER, MARYLAND	29267AD-SH1	
23OCT15	AMI	TWH	PIERCE		(2) REAR OUTLETS, IPO CROSSLAY COMPT, DELUGE, GENERATOR			
03AUG15	AMI	WKL	MODEL					

**Pierce MANUFACTURING INC.**

JOB NO. 29267

SCALE 1:24 DATE

DRAWN BY AMI 30JUL15

CHECKED BY WKL 30JUL15

SHEET SIZE D SHEET NO. 1 OF 2