


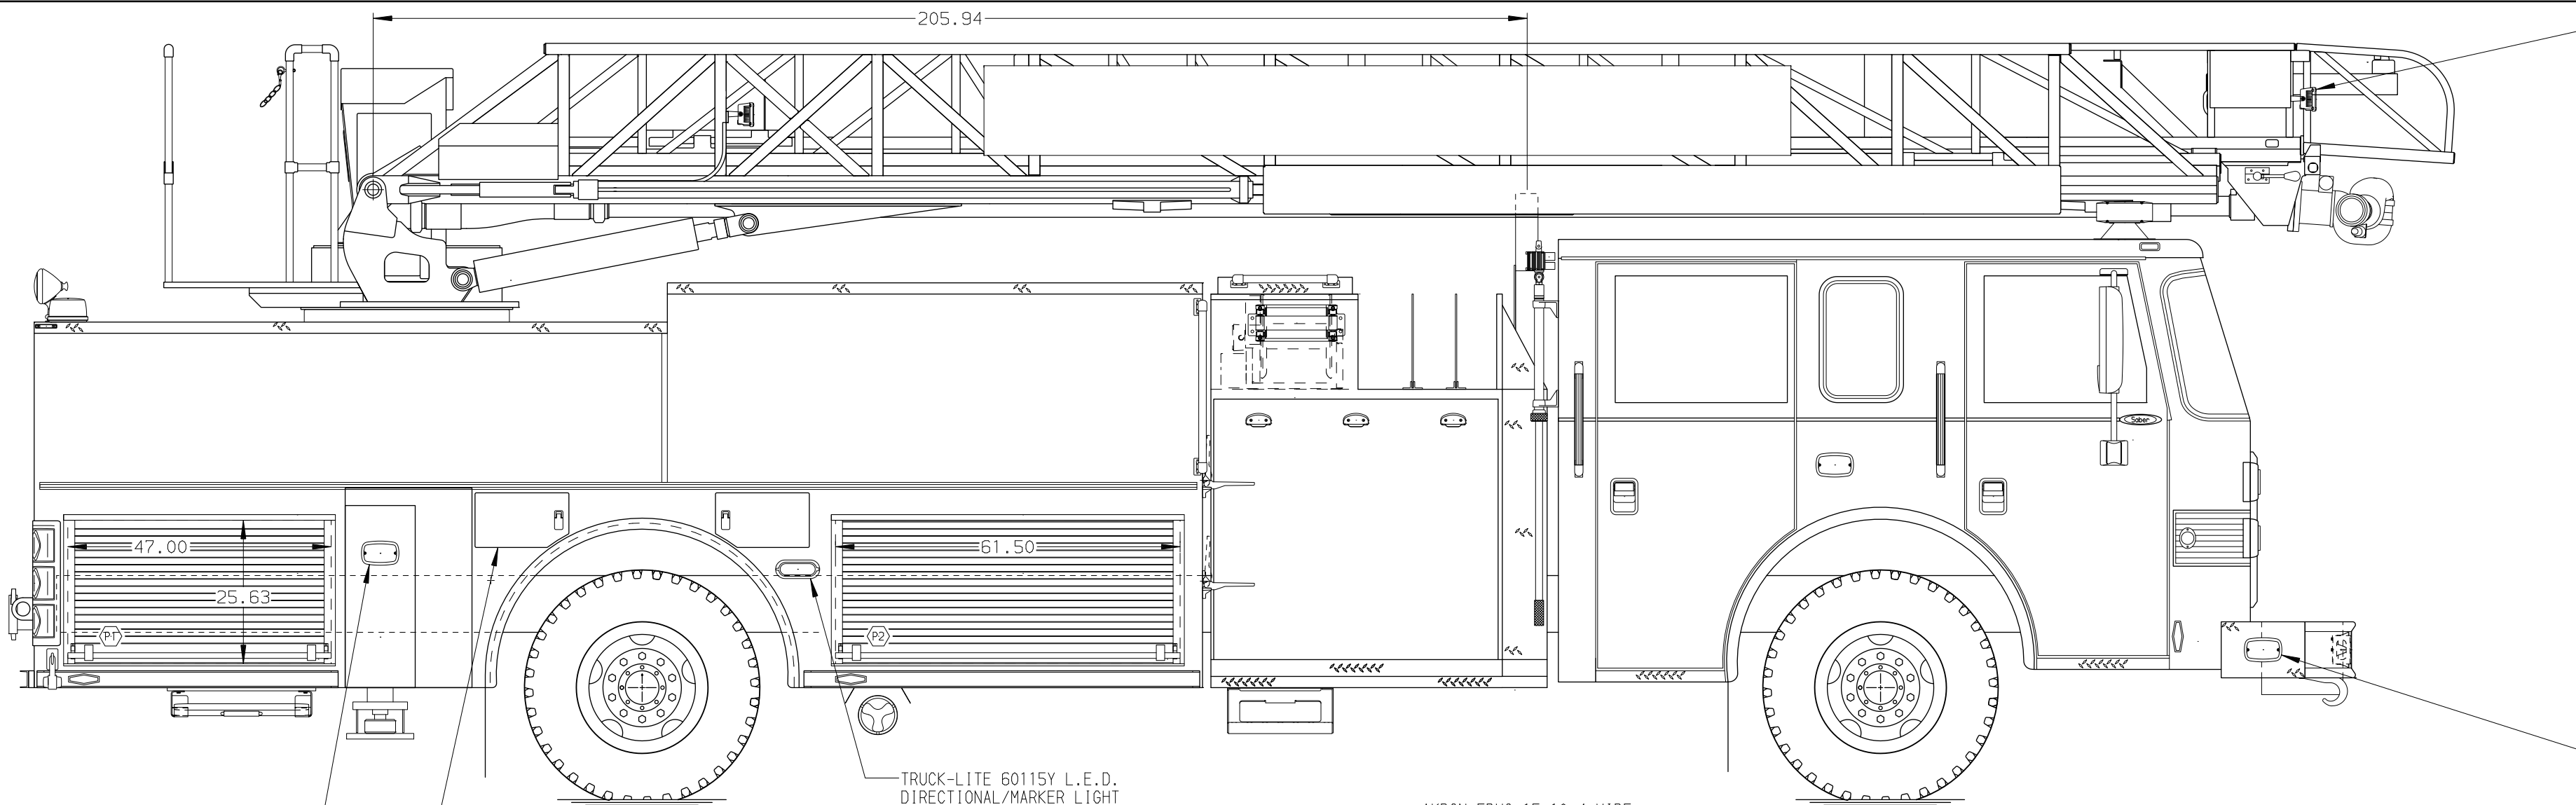

WHELEN M6KC L.E.D. STABILIZER WARNING LIGHT EACH SIDE

(3) DOUBLE AIR BOTTLE COMPARTMENTS WITH A PAINTED DOOR (2) PS (1) DS

TRUCK-LITE 60115V L.E.D. DIRECTIONAL/MARKER LIGHT EACH SIDE

AKRON ERWC-15-10 4-WIRE ELECTRIC REWIND CORD REEL WITH 200' OF 10/4 CABLE

WHELEN MICRO PIONEER MPBW 12V L.E.D. TIP LIGHT EACH SIDE

(2) WHELEN FREEDOM FNMINI 24.00" L.E.D. LIGHTBARS L.E.D. IDENTIFICATION/CLEARANCE LIGHTS

RETRAC HEATED/REMOTE MIRRORS WITH CONVEX SECTION

(2) WHELEN M6 L.E.D. WARNING LIGHTS IN A COMMON BEZEL EACH SIDE

(2) WHELEN M6T L.E.D. DIRECTIONAL LIGHTS IN A COMMON BEZEL EACH SIDE


PATTERENED STAINLESS STEEL TRIM BAND

MOUNTING PROVISIONS FOR FRONT INLET

19.00" BUMPER EXTENSION

(2) GROVER AIR HORNS

(2) WHELEN M6 L.E.D. WARNING LIGHTS EACH SIDE

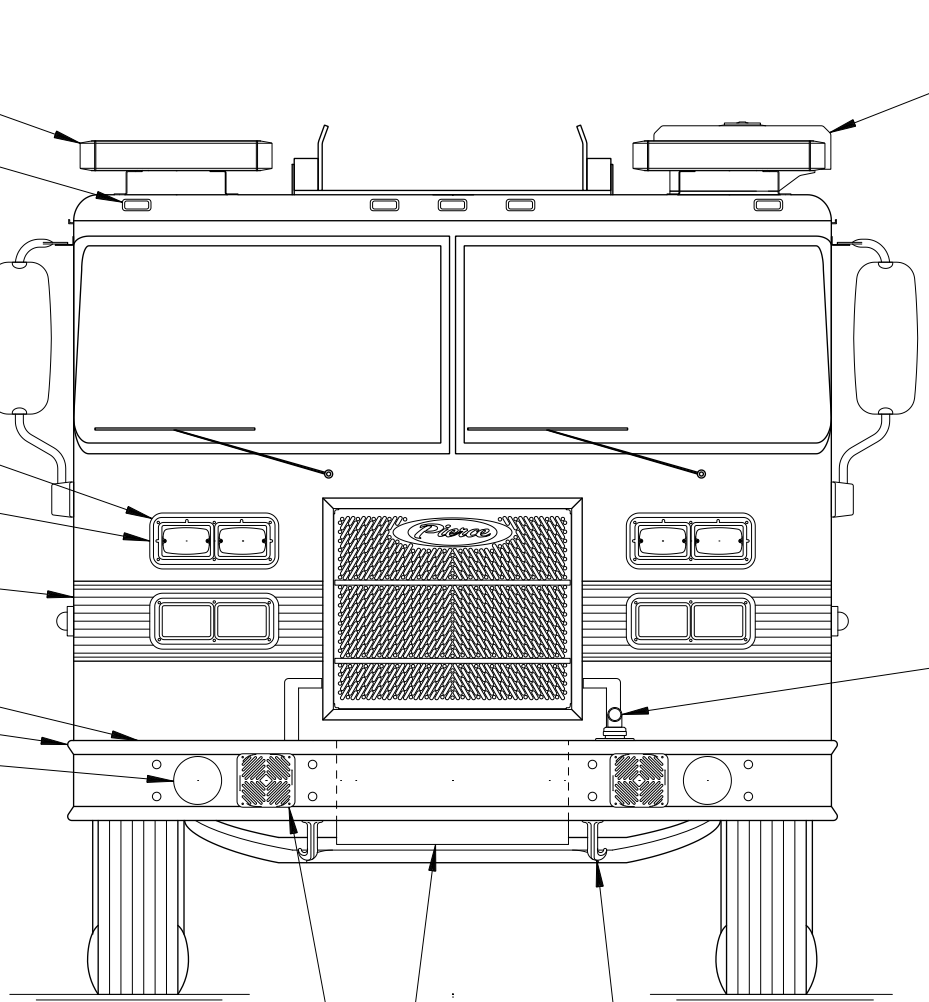


CAB AIR CONDITIONER

1.50" OUTLET WITH 2.00" PIPING

(2) CHROME TOW HOOKS

(2) WHELEN S431SP SPEAKERS WITH STAINLESS STEEL GRILLE CENTER HOSE TRAY FOR 150' OF 1.75" HOSE WITH ALUMINUM 4-WAY COVER NOTCHED FOR PRECONNECTED HOSE

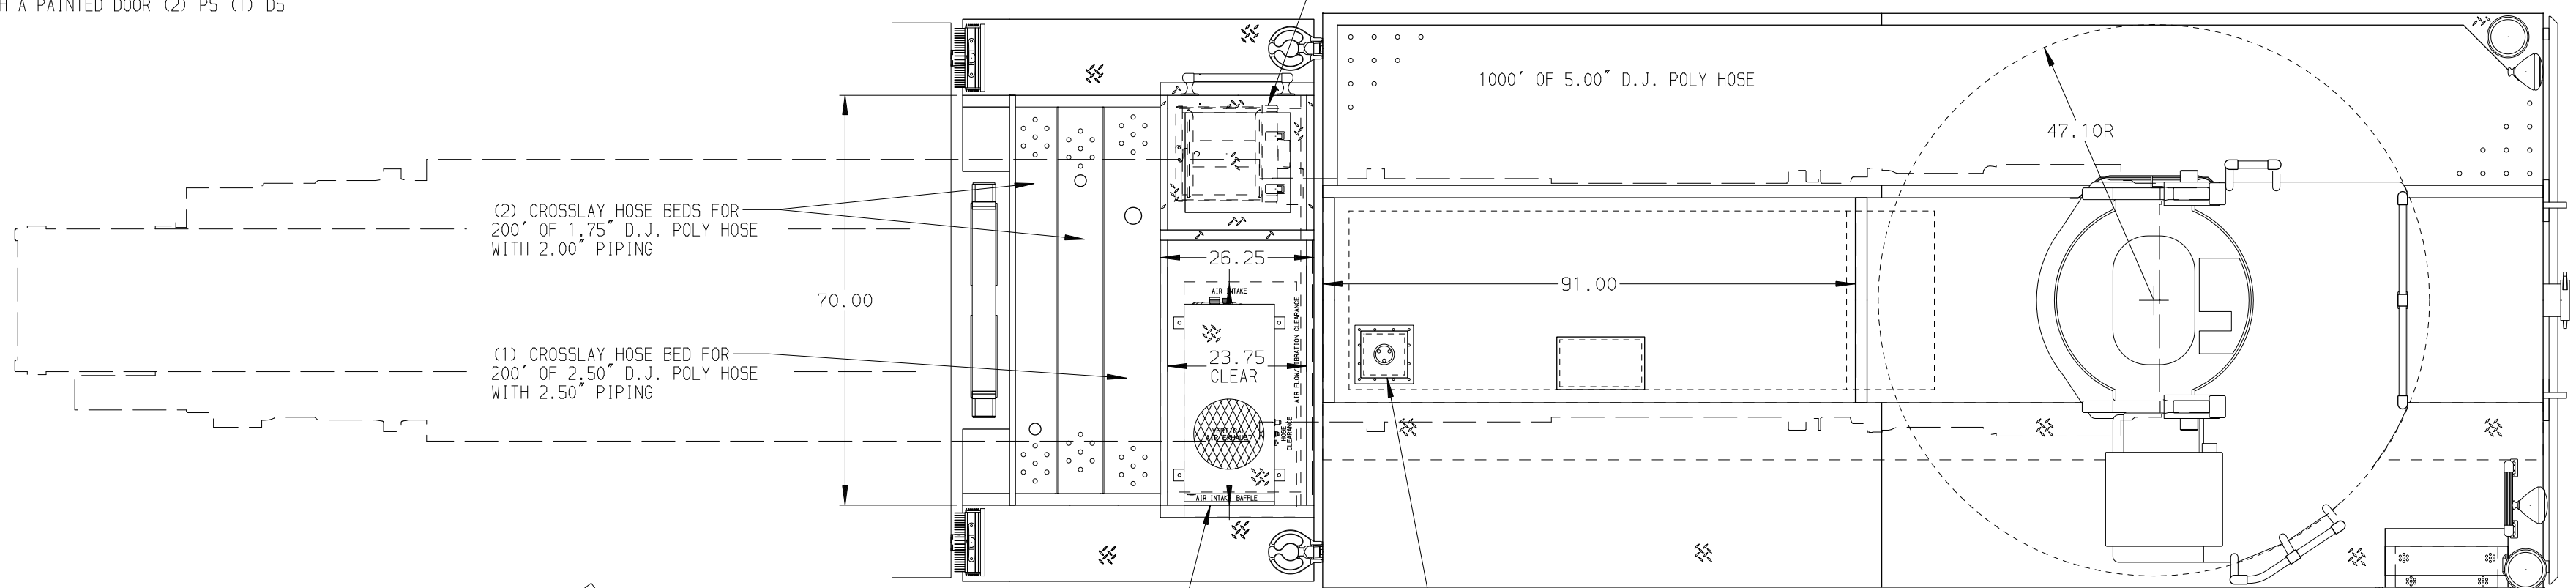

(2) CROSSLAY HOSE BEDS FOR 200' OF 1.75" D.J. POLY HOSE WITH 2.00" PIPING

(1) CROSSLAY HOSE BED FOR 200' OF 2.50" D.J. POLY HOSE WITH 2.50" PIPING


HARRISON 6KW C-GEN HYDRAULIC GENERATOR

20 GALLON FOAM CELL

FIRE RESEARCH EVOLUTION FCA530-VIS 12V L.E.D. LIGHT WITH EXTENDABLE POLE EACH SIDE

DIESEL EXHAUST FLUID ACCESS WITH A PAINTED DOOR

WHELEN MICRO PIONEER MPBW 12V L.E.D. TRACKING LIGHT EACH SIDE

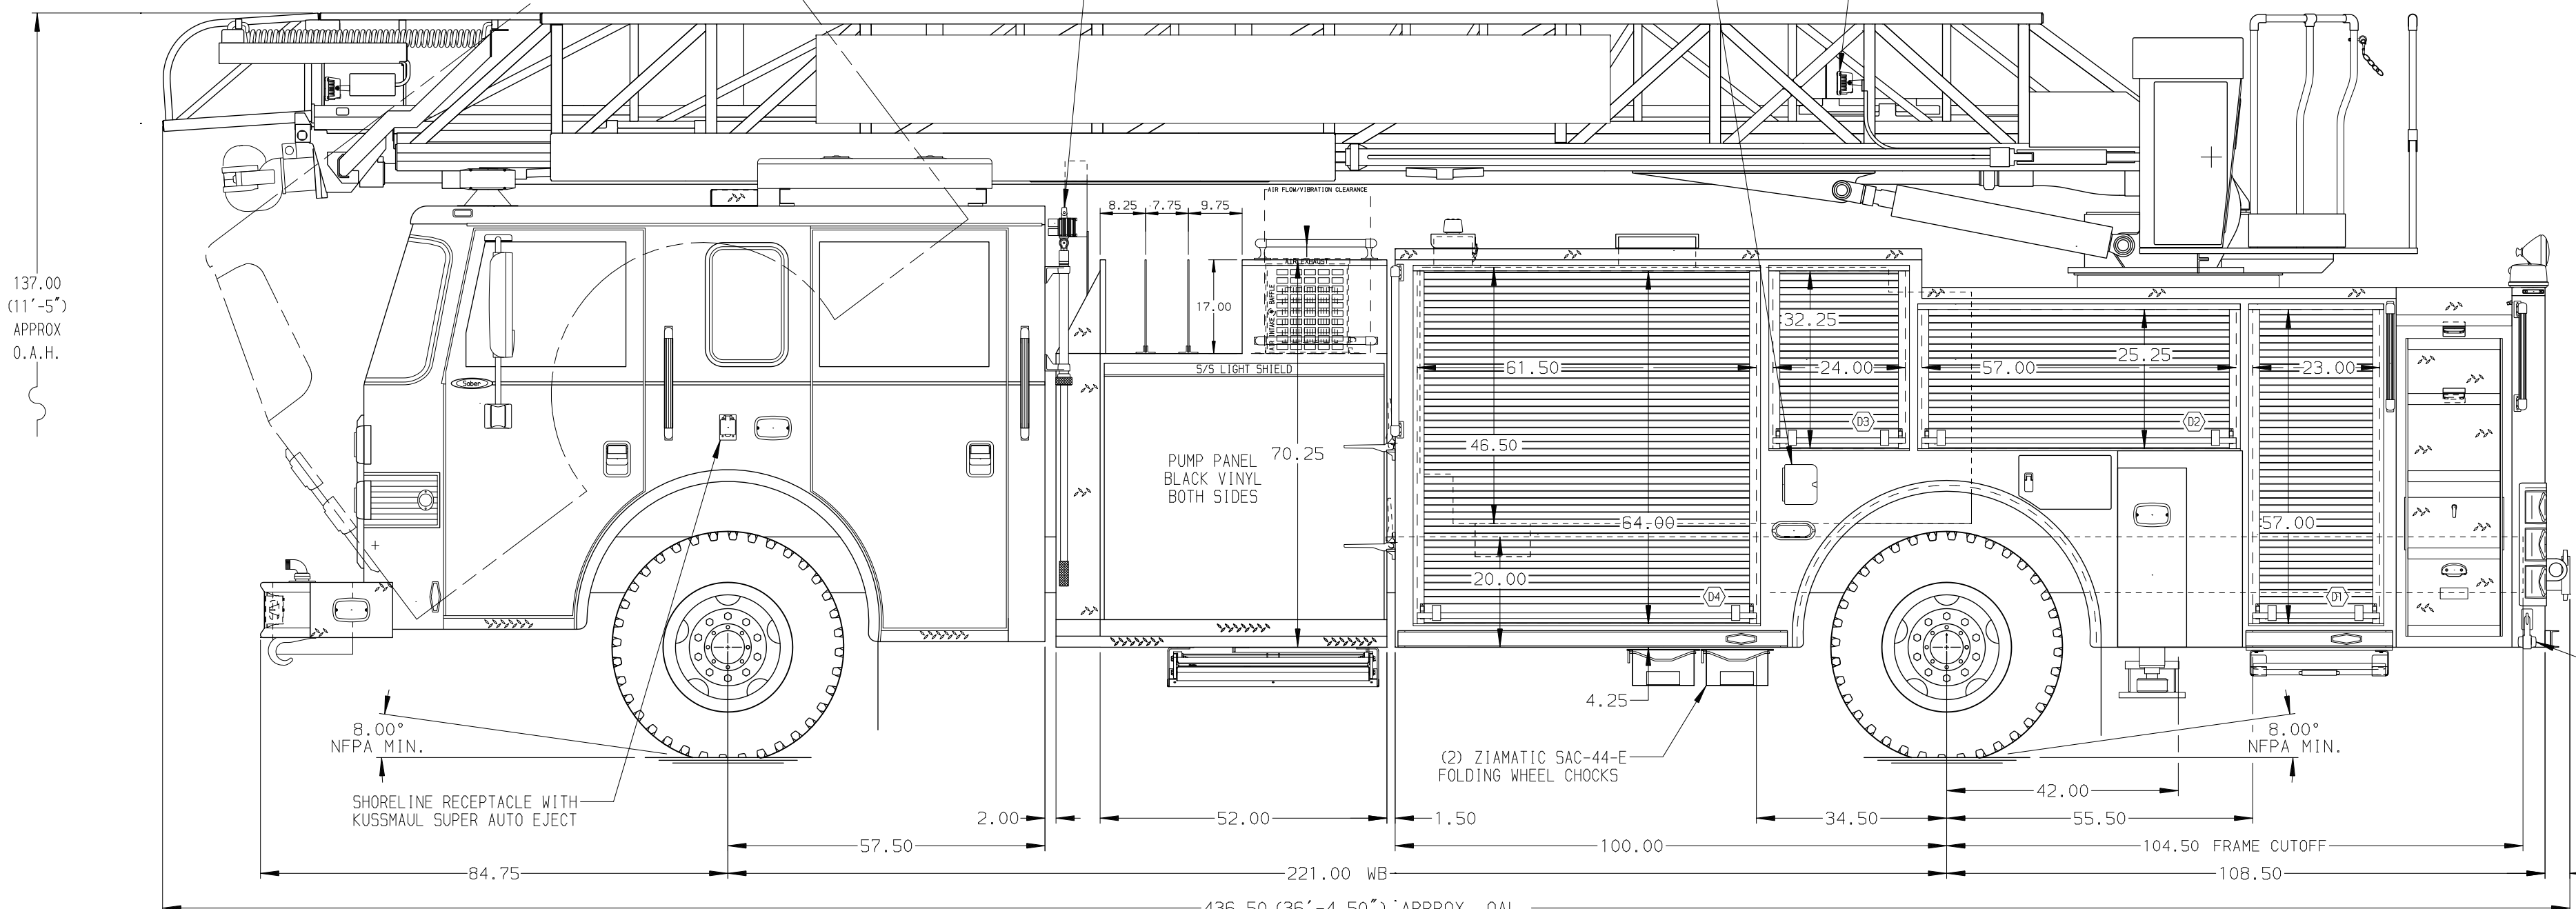

8.00" NFPA MIN.

SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO EJECT

PUMP PANEL BLACK VINYL BOTH SIDES

5/8" LIGHT SHIELD

FOR FUTURE SYSTEM CLEARANCE

57.00

24.00

32.25

46.50

61.50

20.00

64.80

57.00

23.00

25.25

57.00

42.00

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.00 WB

436.50 (36'-4.50") APPROX. OAL

2.00

52.00

1.50

100.00

34.50

55.50

104.50

108.50

4.50

221.0