


HOSEBED CAPACITIES

- ① 600' OF 3.00" D.J. POLY HOSE
- ② 600' OF 5.00" D.J. POLY HOSE
- ③ 150' OF 2.50" D.J. POLY HOSE

SURFACE DESIGNATION AND PATHWAY MARKINGS

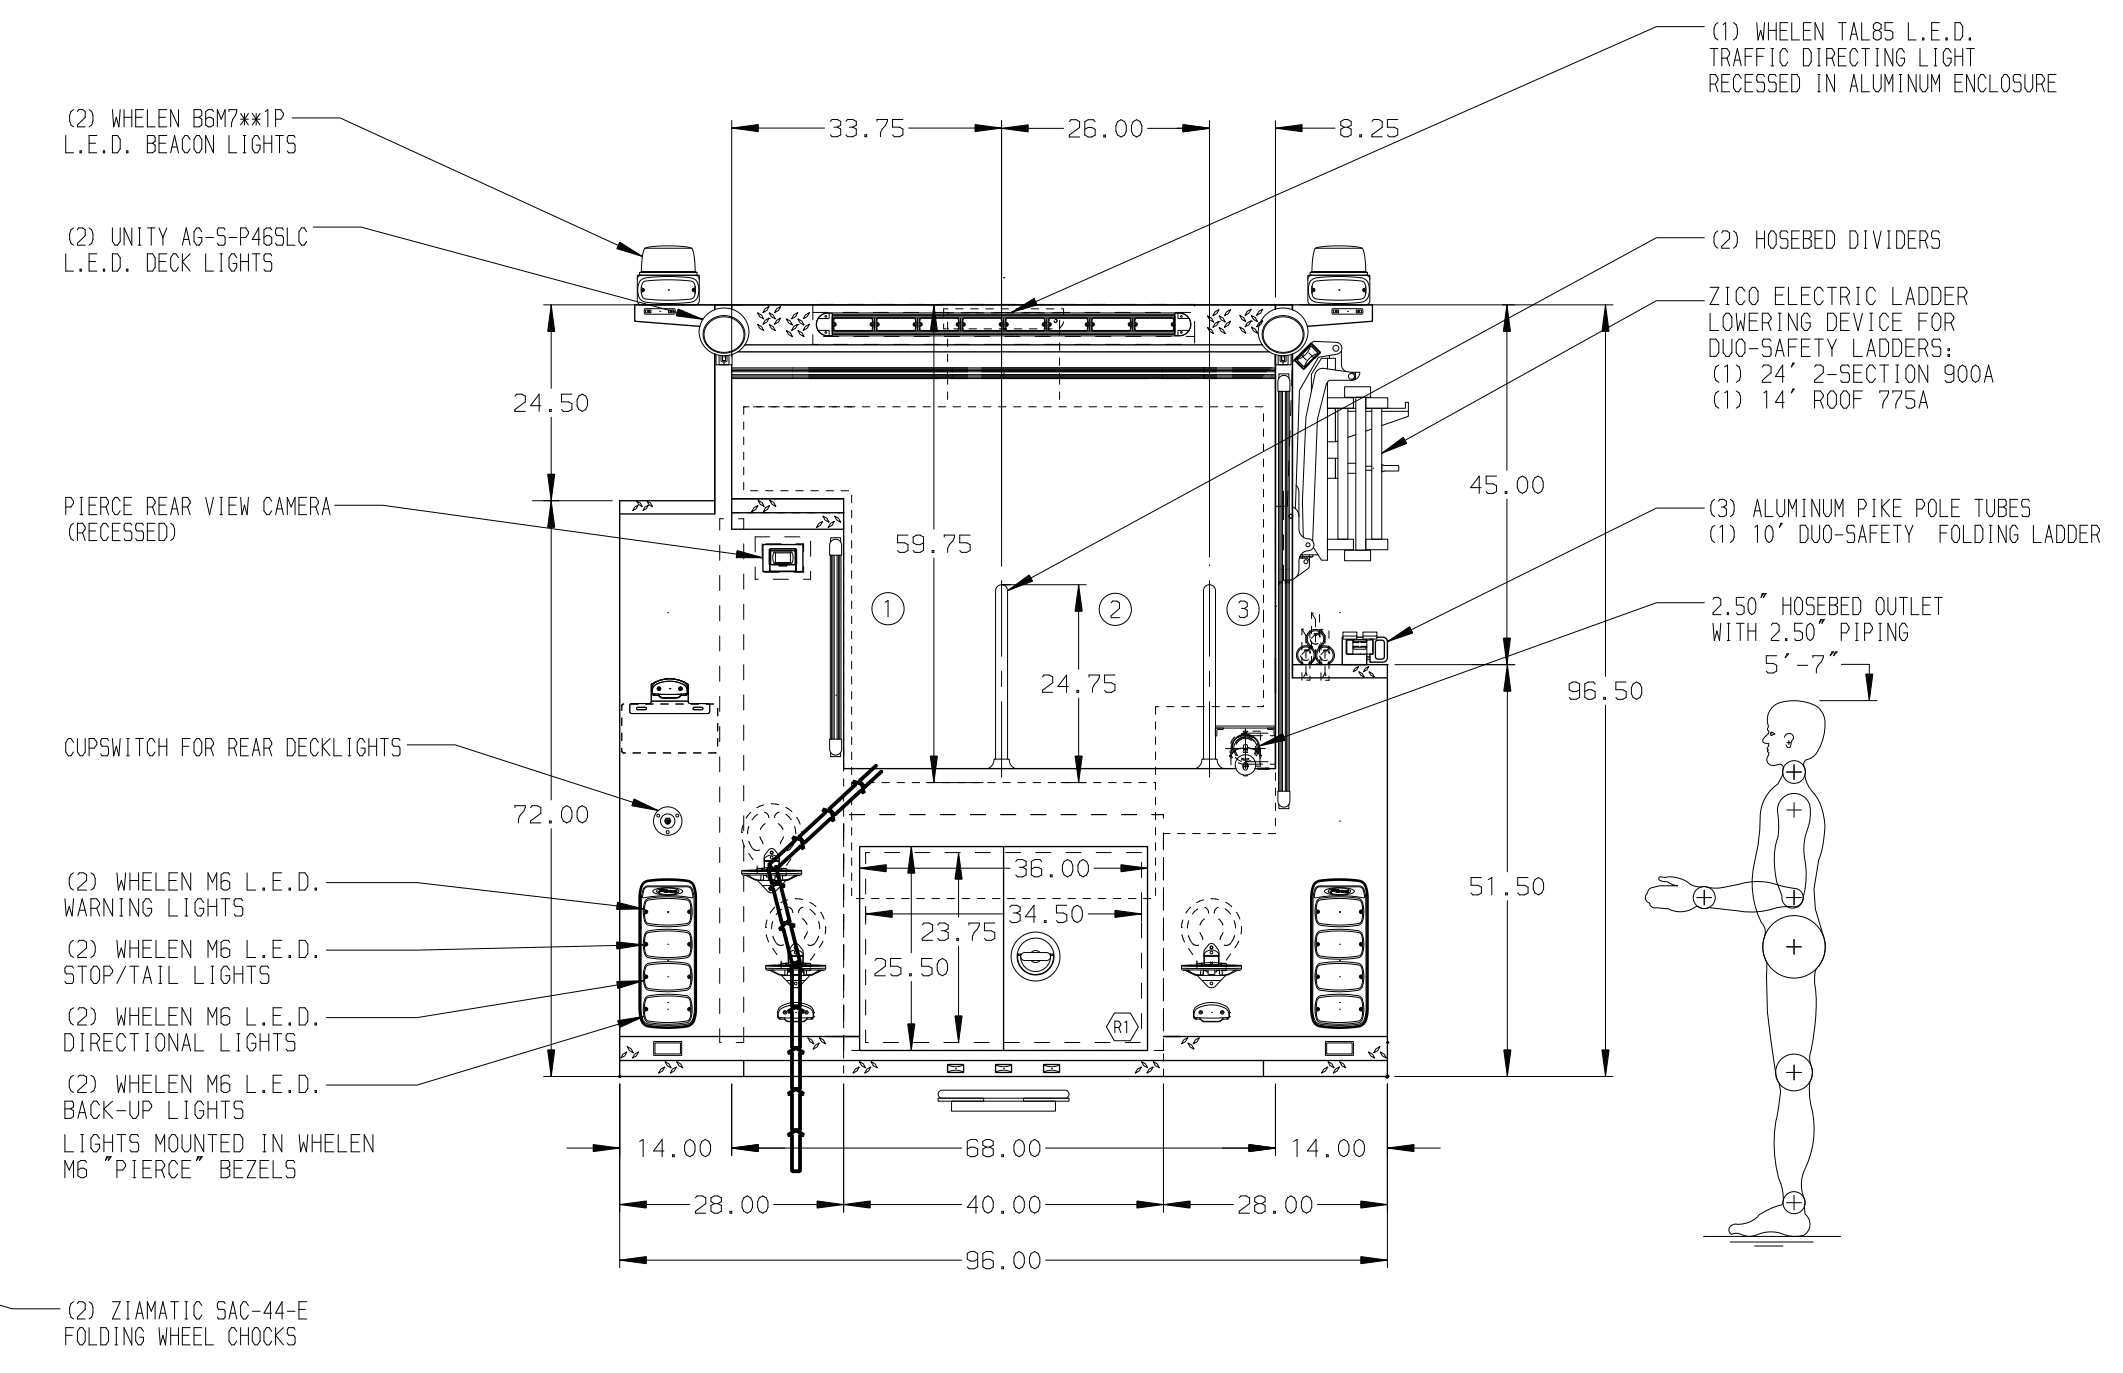

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED AS HIGH AS POSSIBLE ON THE WATER TANK WALL, TOWARDS THE FRONT OF THE TRUCK
2. BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
3. ONE AKRON MODEL ERWH-15-10 ELECTRIC REWIND CORD REEL WITH 200' OF 10/3 CABLE AND CAPTIVE ROLLER ASSEMBLY IN PASSENGER'S SIDE CARGO AREA
4. (1) 120V DUPLEX RECEPTACLE BEHIND THE DRIVER'S SEAT AND ONE ON EACH SIDE OF THE BACK WALL OF THE EMS CABINET

REV	DATE	BY	CH	ENFORCER
06MAY17	LST	JBO		MAKE
04APR17	LST	JBO		PIERCE
02FEB17	LST	CCA		MODEL

		JOB NO.	30920
		SCALE	DATE
TITLE	1500-D-750 GAL POLY, 152" BODY (3) X-LAYS, ZICO LADDER RACK, DELUGE, GENERATOR		
FOR	VILLAGE OF MUNDELEIN FIRE DEPARTMENT MUNDELEIN, ILLINOIS		
DWG NO.	30920AD-SH1		
	DRAWN BY	LST	26JAN17
	CHECKED BY	CCA	27JAN17
	SHEET SIZE	D	SHEET NO. 1 OF 1