


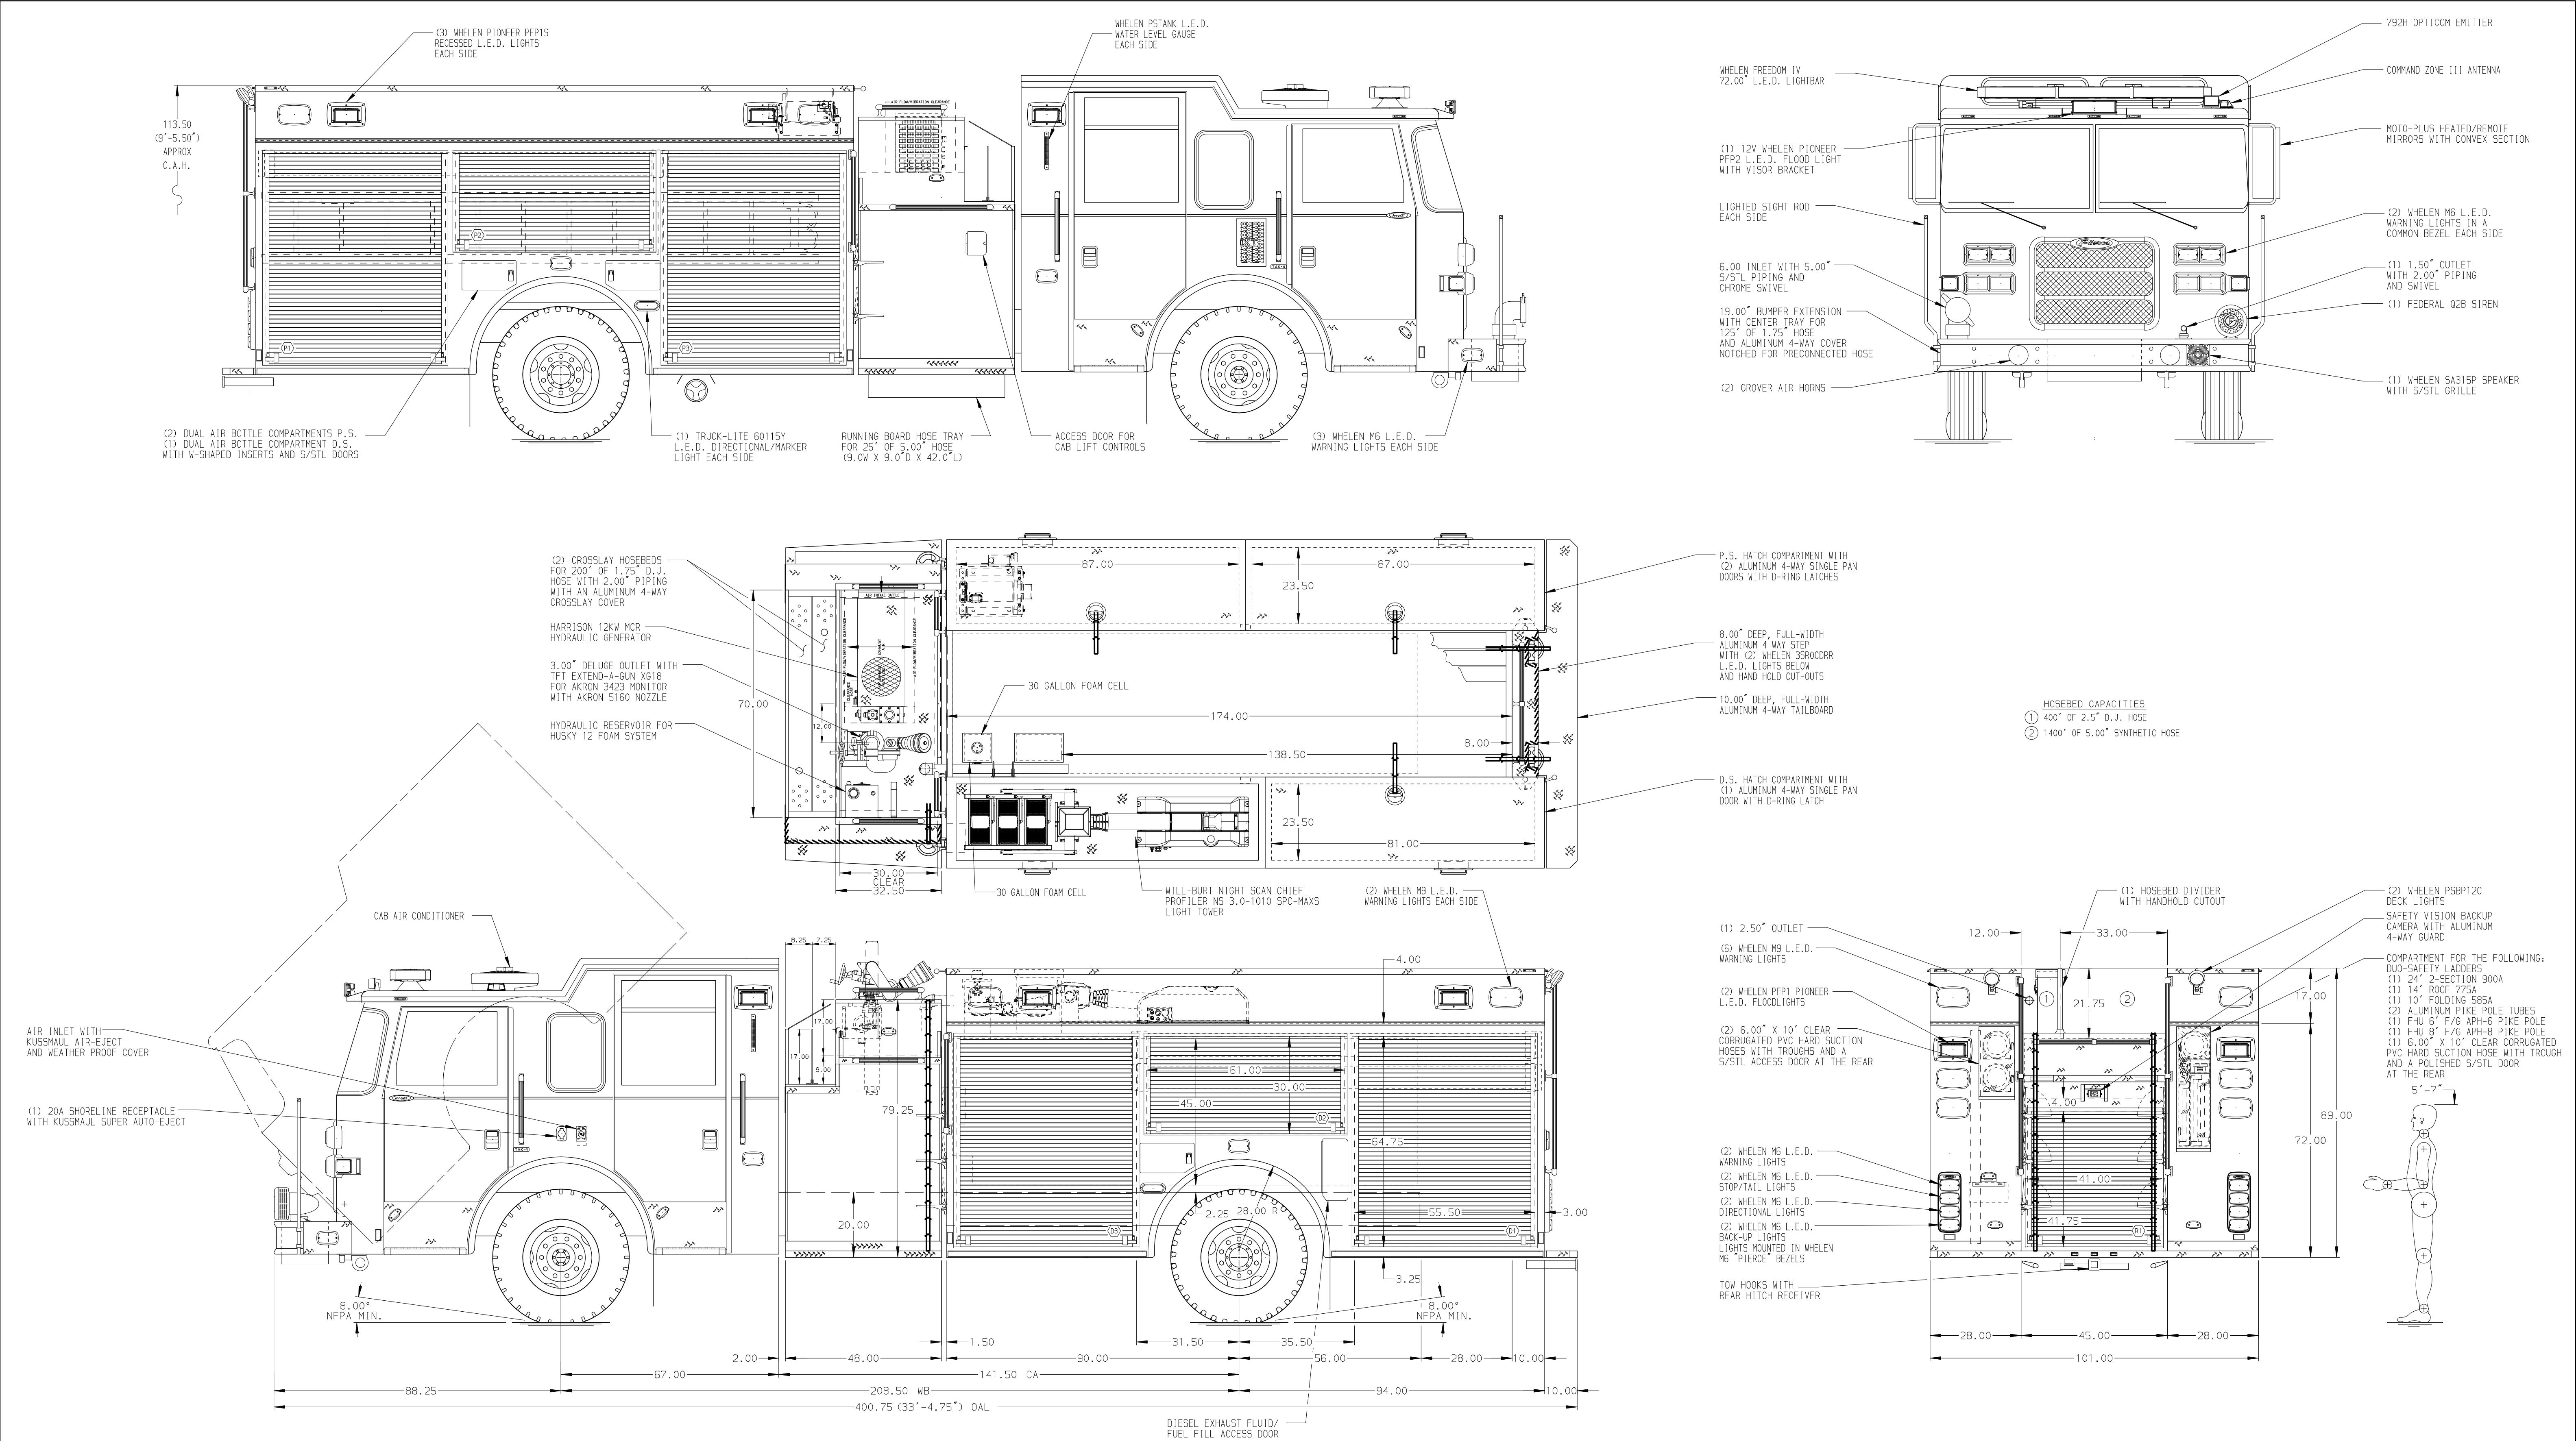

ALUMINUM BODY										MAXIMUM O.A.L. 400.75"										MAXIMUM O.A.H. 113.50"										SIDE ROLL AND FRONTAL IMPACT PROTECTION										Pierce MANUFACTURING INC.										JOB NO.		31399																											
																																																		SCALE		DATE																											
																																																		1:24																													
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.										1. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET 2. ONE HANNAY ELECTRIC REWIND CORD REEL ELFCR1622-14-16 LOCATED IN HATCH ABOVE P3 WITH 200' OF 10/3 CABLE AND CIRCLE-D JUNCTION BOX																				CHASSIS DATA										TITLE		1500-D-970P W/30 GAL FOAM CELL, 184" HDRP BODY (2) X LAYS, LADDERS THRU BODY, DELUGE, GENERATOR										DRAWN BY		JWO		23JUN17																							
																														MAKE										FOR		OXFORD FIRE CENTER FIRE COMPANY OXFORD, CONNECTICUT										CHECKED BY		CCA		23JUN17																							
																														MODEL																																																	
																				REV										DATE										BY										CH										DWG NO.		31399AD-SH1										SHEET SIZE		D		SHEET NO.		1 OF 1	
																																								ARROW-XT																																							