


HOSEBED CAPACITIES

- ① - 500' OF 3.00" D.J. POLY HOSE
- ② - 1000' OF 5.00" LARGE DIAMETER HOSE
- ③ - UNASSIGNED

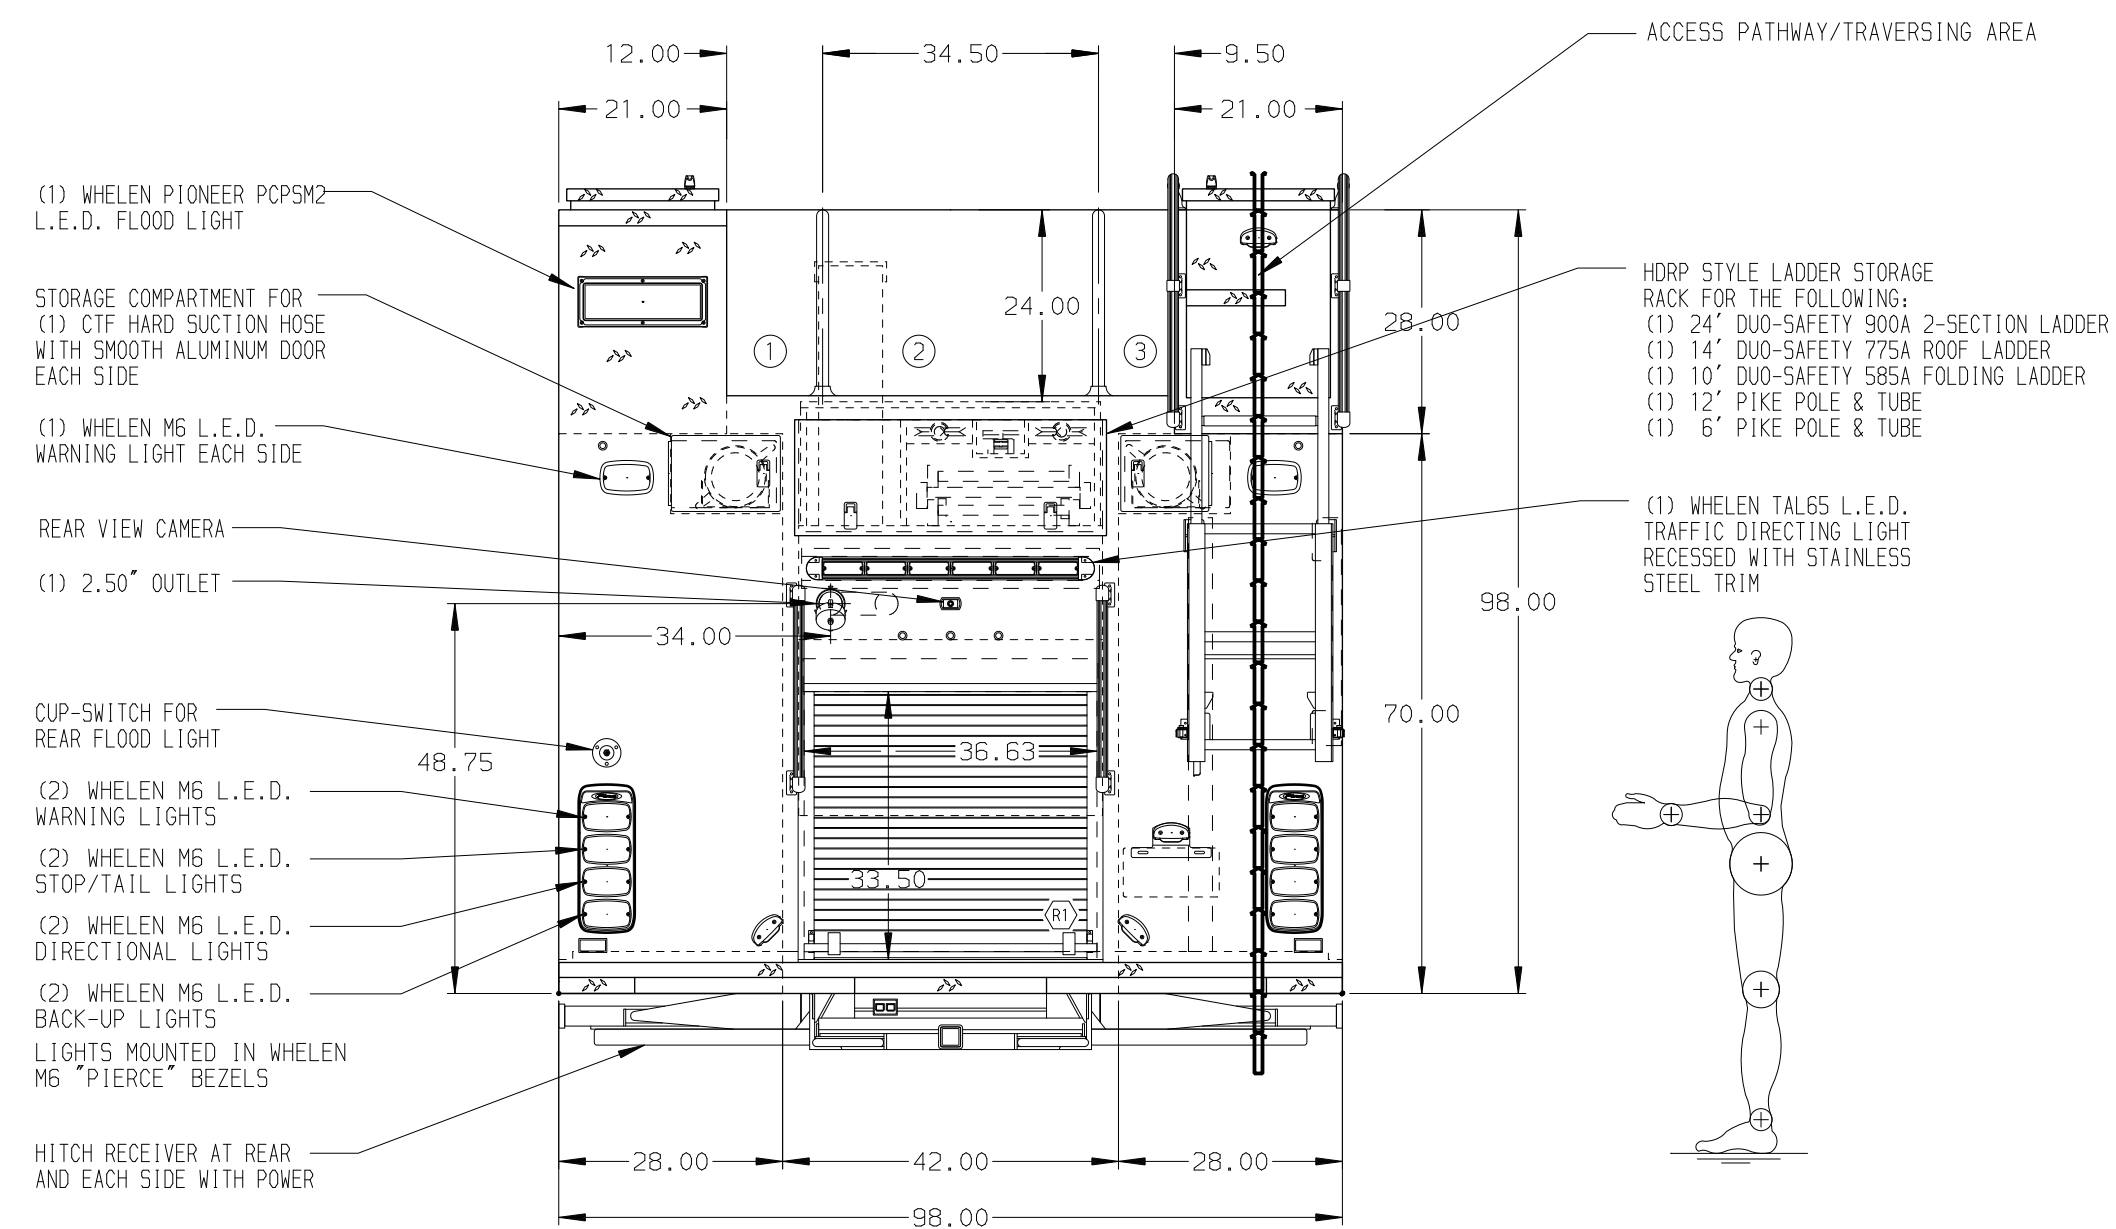

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER'S SIDE STEP WELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT
- ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENT P2, TWO IN P1 & P3, THREE IN D3
- ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT D2
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT P1 & P3
- TWO ALUMINUM SLIDE-OUT TOOLBOARDS IN COMPARTMENT D1 & P3
- LITTLE GIANT LADDER STORAGE IN COMPARTMENT P4
- L-SHAPED PARTITION IN COMPARTMENT P4
- REMOVABLE SHELF IN HATCH COMPARTMENTS ABOVE CASCADE BOTTLES EACH SIDE

- ONE VERTICAL PARTITION IN COMPARTMENT D3
- CIRCUIT BREAKER PANEL IN COMPARTMENT D3
- BREATHING AIR CASCADE SYSTEM PANEL IN COMPARTMENT D3
- SPACESAVER MODEL 100A (2) BOTTLE FILL ENCLOSURE LOCATED IN COMPARTMENT D3
- TWO 6000 ASME AIR STORAGE BOTTLES IN HATCH COMPARTMENT EACH SIDE
- ONE AKRON ELECTRIC CORD REEL MODEL ERWC-15-10 WITH CAPACITY FOR 200' OF 10/3 CABLE LOCATED IN COMPARTMENT P4
- ONE HANNAVY AIR REEL MODEL E1516-17-18 WITH CAPACITY FOR 200' OF 0.38" HOSE LOCATED IN HATCH COMPARTMENT ABOVE P4
- TWO HANNAVY HYDRAULIC REELS MODEL EF2220-17-18 WITH CAPACITY FOR 100' OF HOLMATRO CORE TECH HOSE LOCATED IN HATCH COMPARTMENT ABOVE P1

REV	DATE	BY	CH	ARROW-XT
10APR17	AMI	TWH		
08MAR17	AMI	TWH		
03MAR17	AMI	TWH		
09DEC16	AMI	WKL		

Pierce MANUFACTURING INC.		JOB NO.	30613
		SCALE	1:24
		DATE	
		DRAWN BY	AMI
		CHECKED BY	WKL
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE	1500-D-750P 214" RESCUE PUC BODY, (2) XLAYS, GENERATOR LIGHT TOWER, STOKES BASKET, LADDER STORAGE BELOW HB
FOR	POCOMOKE CITY VOLUNTEER FIRE COMPANY INC POCOMOKE CITY, MARYLAND
DWG NO.	30613AD