

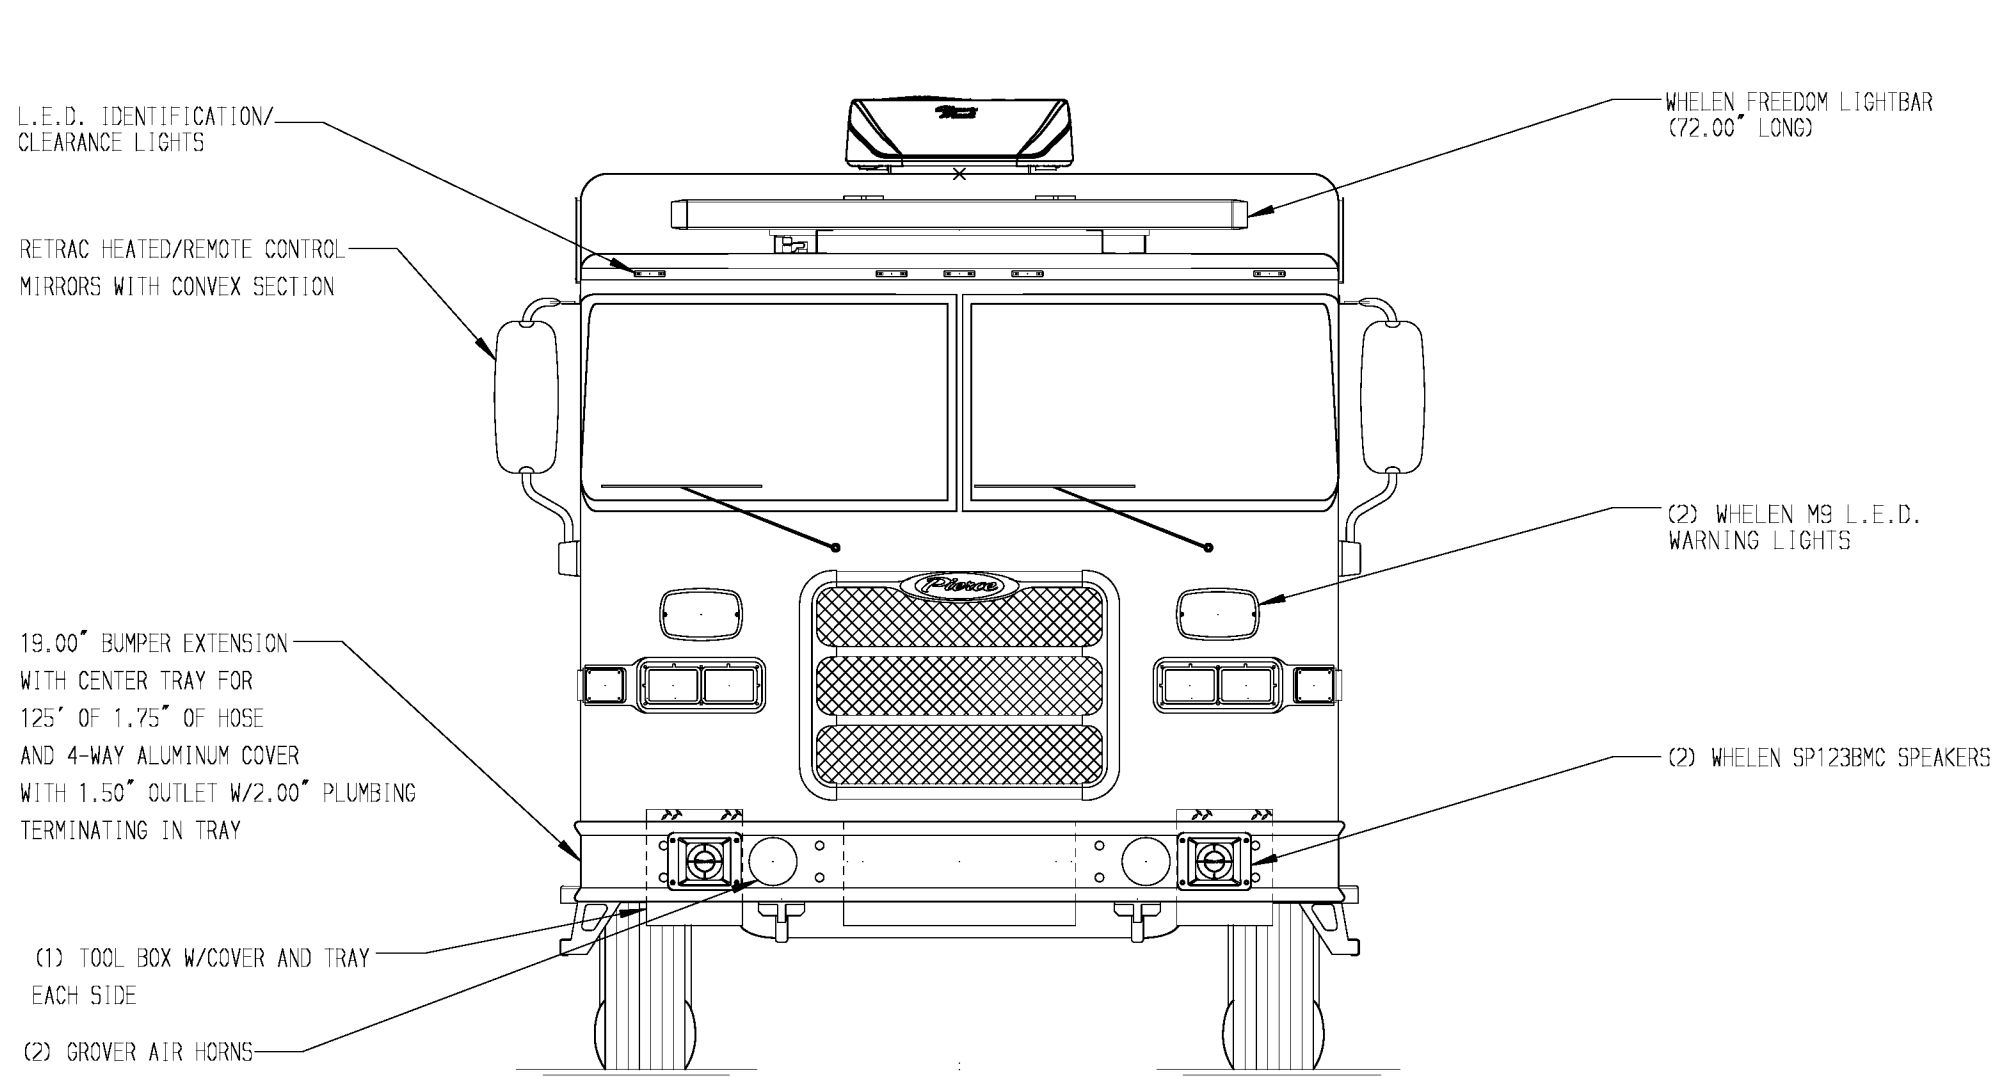


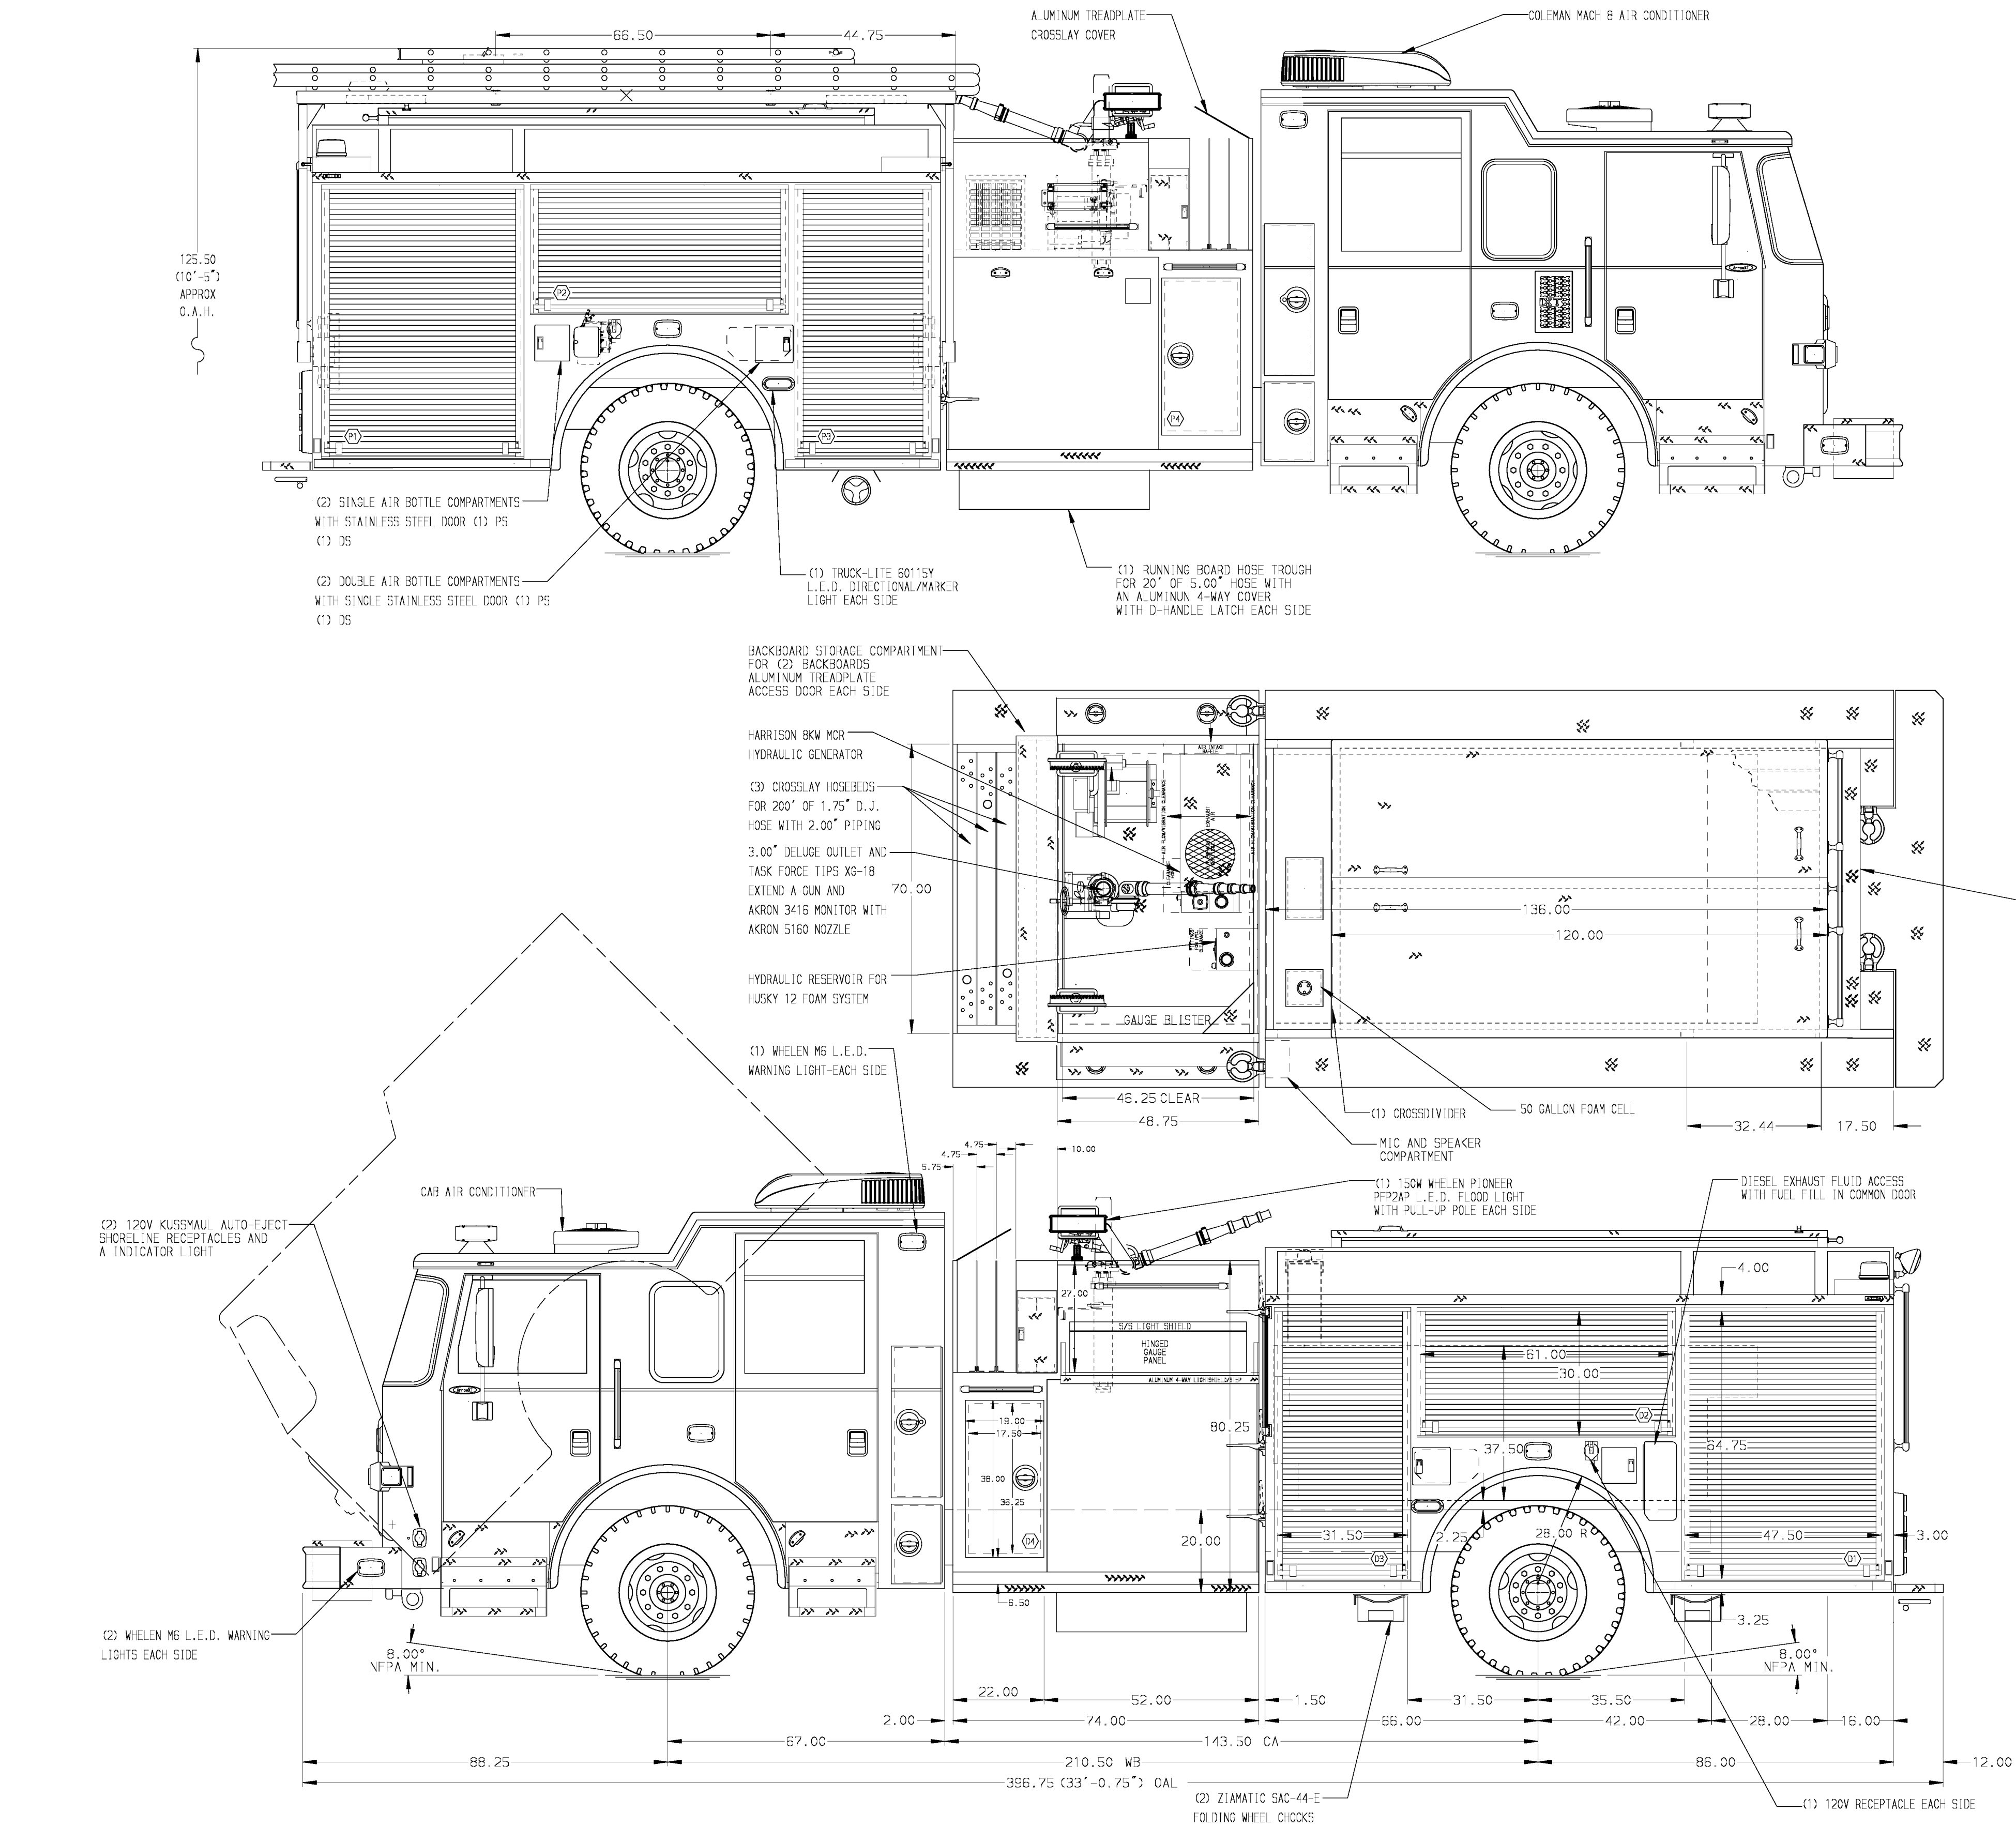

- HOSEBED CAPACITIES
- 1 300' OF 1.50" D.J. POLY HOSE
 - 2 500' OF 2.50" D.J. POLY HOSE
 - 3 1000' OF 5.00" D.J. POLY HOSE

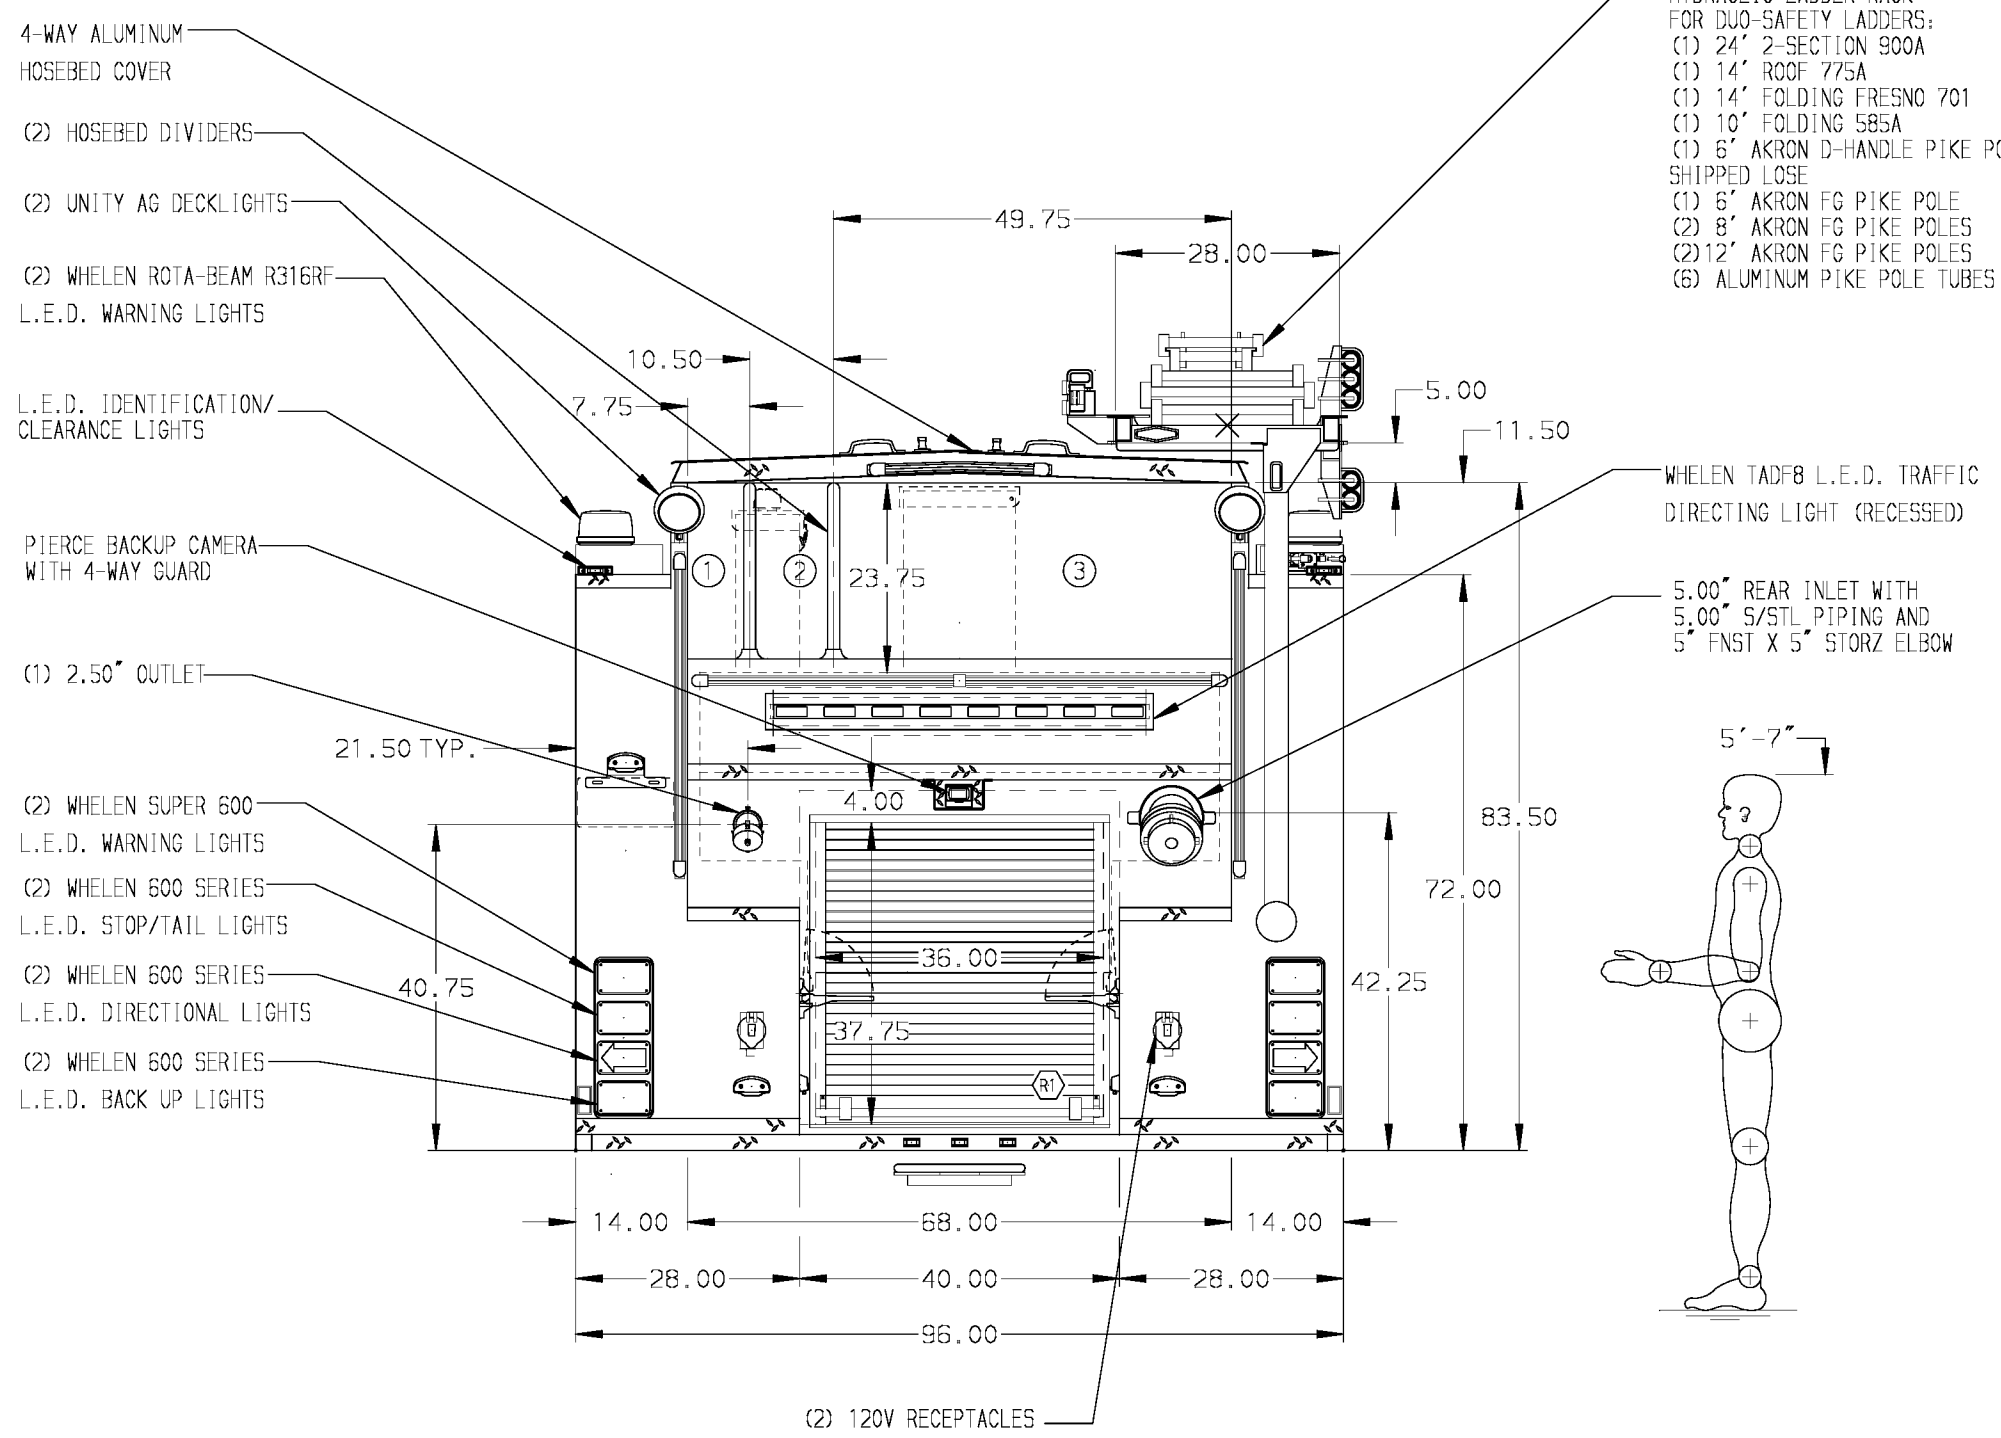

ALUMINUM BODY

MAXIMUM O.A.H. 156.00"

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN D3
2. SUB-FEED CIRCUIT BREAKER PANEL IN P3 WITH A GREEN INDICATOR LIGHT
3. 5/8\"/>

REV	DATE	BY	CH	ARROW	XT
1	11NOV15	LST	CHR	MAKE	
2	09NOV15	LST	CHR	PIERCE	
3	16OCT15	LST	CHR	MODEL	

		JOB NO.	29368
MANUFACTURING INC.		SCALE	1:24
		DATE	
TITLE		DRAWN BY	LST
1250-D-750P W/ 50 GAL FOAM CELL, 152\"/>		CHECKED BY	SMA
FOR		SHEET SIZE	D
CITY OF YUMA FIRE DEPARTMENT		SHEET NO.	1
YUMA, ARIZONA		OF	1
DWG NO.		29368AD	