

PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

FEATURES FOR COMFORT AND CONVENIENCE

- Create customizable, 7-day schedules
- 24-hour on/off timer
- Precision Inverter® technology (variable speed compressor)
- Soft start compressor
- Natural air flow
- 4-way cooling
- Surge Cool/Heat
- Cooling/Heating/Fan mode
- Dry mode
- Sleep mode
- Independent vane control
- 3 fan speeds
- Ultra-quiet turbo fan
- Evaporator frost control
- Auto restart
- Auto changeover
- DiamonBlue Advanced Corrosion Protection
- Clean, modern look
- Flexible installation
- ENERGY STAR® qualified models
- Precise air distribution

OPERATES IN EXTREME CONDITIONS

- Built-in low ambient standard down to 14°F (Cooling mode)
- Low ambient operation down to -13°F (Heating mode)

WI-FI AVAILABLE ON SELECT MODELS FOR CONTROL ANYTIME, ANYWHERE

- Easy to use FriedrichGo™ app
- Control with smartphone
- Compatible with Amazon Alexa and Google Home



WIRELESS REMOTE WITH THE ABILITY TO CHANGE TO A COOL-ONLY REMOTE



**PRECISION
INVERTER®**

NOTE: Grilles are sold separately



FPHMR18A3A , FPHMR24A3A



FPHMR36A3A

SPECIFICATIONS

PERFORMANCE RATINGS		Multi Zone Cassette - Heat Pumps			
		9k	12k	18k	24k
INDOOR MODEL		FPHFC09A3A FPHFC09A3B Wi-Fi	FPHFC12A3A FPHFC12A3B Wi-Fi	FPHFC18A3A FPHFC18A3B Wi-Fi	FPHFC24A3A FPHFC24A3B Wi-Fi
SPECIFICATIONS					
CAPACITY COOLING (RATED)	Btu	9000	12000	18000	24000
CAPACITY HEATING (RATED)	Btu	10200	13500	20400	27000
MOISTURE REMOVAL	Pts/h	1.9	2.5	3.2	5.0
AIRFLOW (HIGH)	CFM	306	471	559	1100
SOUND RATING (MAX.-MIN.)	dB-A	40/28	40/28	40/28	40/28
ELECTRICAL DATA					
POWER SOURCE	V-Hz-Phase	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14AWG	4 x 14AWG	4 x 14AWG	4 x 14AWG
REFRIGERATION SYSTEM					
CONNECTIONS		Flare	Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4	3/8
SUCTION LINE O.D.	in	3/8	3/8	1/2	5/8
DIMENSIONS & WEIGHT					
W X H X D	in	22 1/2 x 8 1/2 x 22		33 x 9 3/4 x 33	
NET WEIGHT	lbs	31.9	34	61.8	59.5
SHIPPING WEIGHT	lbs	38.5	40.7	81.6	79.5
PACKAGE DIMENSIONS W X H X D	in	28 3/4 x 11 1/2 x 26		39 1/4 x 37 x 14	39 1/4 x 37 x 14 1/2

PERFORMANCE RATINGS		Multi Outdoor		
		18k	24k	36k
OUTDOOR MODEL		FPHMR18A3A	FPHMR24A3A	FPHMR36A3A
SPECIFICATIONS				
POWER SOURCE		208-230/60/1	208-230/60/1	208-230/60/1
EST. YEARLY OPERATING COST	\$	\$90	\$172	\$259
RUNNING CURRENT COOLING RATED	A	6.5	8.7	11
RUNNING CURRENT HEATING RATED	A	7.3	8.7	13
POWER INPUT COOLING MIN. - RATED - MAX.	W	1440 [510-2610]	1920 [420-2640]	2520 [700-5000]
POWER INPUT HEATING MIN. - RATED - MAX.	W	1530 [450-3510]	1920 [420-4020]	3060 [600-6000]
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14AWG	4 x 14AWG	4 x 14AWG
DIMENSIONS W x H x D	in	33 7/8 x 26 3/8 x 12 1/4	37 3/8 x 33 x 13 3/8	37 3/8 x 41 3/8 x 13 3/8
NET WEIGHT	lbs	108	159	186
SHIPPING WEIGHT	lbs	119	170	216
REFRIGERATION SYSTEM				
REFRIGERANT		R410A	R410A	R410A
FACTORY PRECHARGE	oz	63	81.13	105.82
FACTORY PRECHARGE	ft	49	74	98
LIQUID LINE O.D.	in	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	3/8
MIN./MAX. LINE LENGTH (EACH)	ft	82	66	66
MIN./MAX. LINE LENGTH (TOTAL)	ft	164	197	197
MAX. HEIGHT DIFFERENCE	ft	49	49	49
SOUND PRESSURE LEVEL COOLING	A	55	59	59
SOUND PRESSURE LEVEL HEATING	A	55	59	59
OPERATING RANGE COOLING	°F DB	14~115	14~115	14~115
OPERATING RANGE HEATING	°F WB	-13~75	-13~75	-13~75
MINIMUM AMPACITY	A	30A	30A	30A
MAX. TD FUSE/BREAKER	A	45A	45A	45A

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh.
For more information, visit www.ftc.gov/energy.

Models require grille. Sold separately.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



MULTI ZONE CONFIGURATION, AHRI RATINGS

Friedrich Model	AHRI Reference Number	Indoor Type	System Capacity	EER	SEER	High Heat 47 °F	HSPF	Low Heat 17°F
FPHMR18A3A	205150429	Non-ducted Indoor Units	18000	12.50	22.00	18000	11.00	12200
	205150428	Ducted Indoor Units	18000	11.50	19.00	18000	9.60	12200
	205150430	Mixed Ducted and Non-ducted Indoor Units	18000	12.00	20.50	18000	10.30	12200
FPHMR24A3A	204101246	Non-ducted Indoor Units	24000	12.50	22.00	24000	11.00	15400
	204005731	Ducted Indoor Units	24000	12.10	21.00	24000	10.00	15400
	203999079	Mixed Ducted and Non-ducted Indoor Units	24000	12.30	21.50	24000	10.50	15400
FPHMR36A3A	204101247	Non-ducted Indoor Units	32000	12.50	21.0	36000	11.00	23200
	203996910	Ducted Indoor Units	32000	12.00	19.50	36000	10.80	22600
	203999080	Mixed Ducted and Non-ducted Indoor Units	32000	12.25	20.25	36000	10.90	22600

MULTI ZONE CONFIGURATION GUIDELINES

FPHMR18A3A 24,000 Btu MAX. CONNECTED CAPACITY DUAL-ZONE ONLY

FOR (2) ZONES:

MINIMUM combination must be 50% of nameplate capacity

Combinations SHOULD NOT:

Exceed the maximum allowable total indoor unit connected capacity of 24,000 Btu.

FPHMR24A3A 33,000 Btu MAX. CONNECTED CAPACITY TRI-ZONE MAX.

FOR (2) ZONES:

MINIMUM combination must be 50% of nameplate capacity

FOR (3) ZONES:

Select any combination of (3) indoor units.

Combinations SHOULD NOT:

Exceed the maximum allowable total indoor unit connected capacity of 33,000 Btu.

FPHMR36A3A 48,000 Btu MAX. CONNECTED CAPACITY TRI-ZONE / FOUR ZONE ONLY.

FOR (3) ZONES:

Select any combination of (3) indoor units with no more than (2) 18,000 Btu indoor units plus (1) other indoor unit.

FOR (4) ZONES:

Select any combination of (4) indoor units.


Combinations SHOULD NOT:

Exceed the maximum allowable total indoor unit connected capacity of 48,000 Btu.

DIMENSIONAL DRAWINGS

INDOOR UNIT / FPHFC09A3A (B), FPHFC12A3A (B)


	W	H	D
FPHFC09A3A (B)	22 1/2"	8 1/2"	22"
FPHFC12A3A (B)			

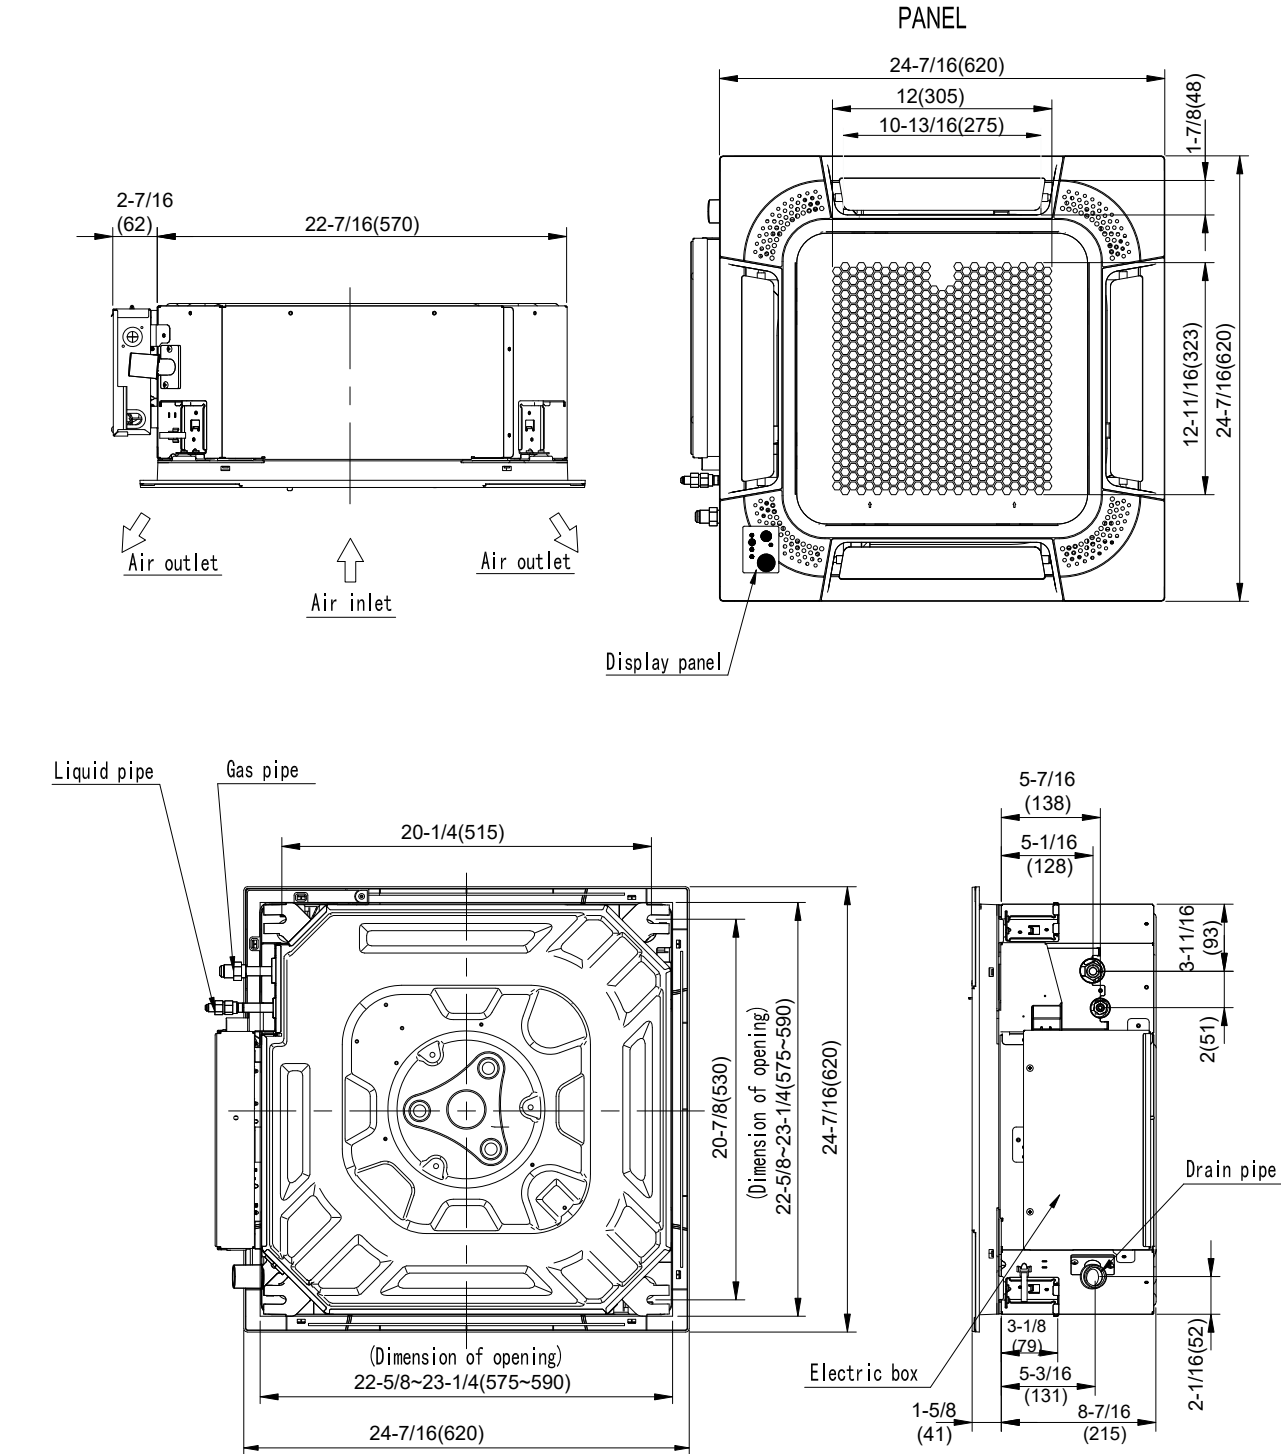

DIMENSIONAL DRAWINGS


INDOOR UNIT / FPHFC18A3A (B), FPHFC24A3A (B)

	W	H	D
FPHFC18A3A (B)	33"	9 3/4"	33"
FPHFC24A3A (B)			

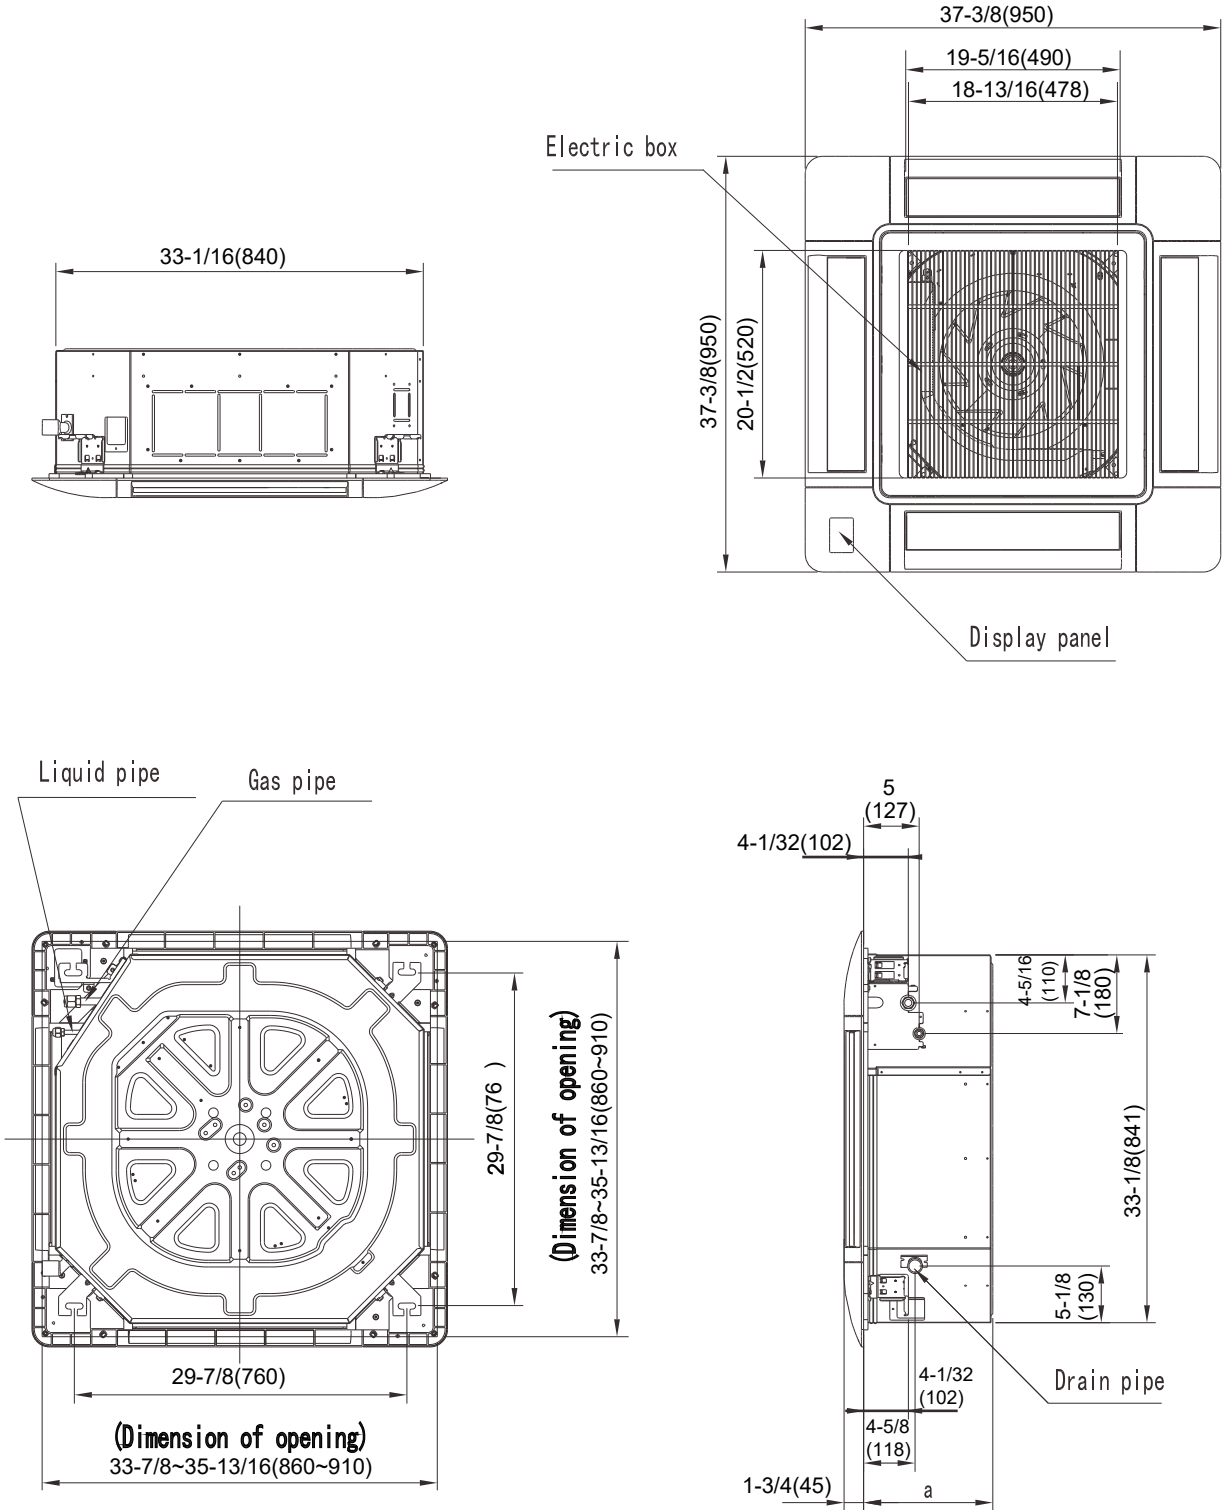

DIMENSIONAL DRAWINGS


OUTDOOR UNITS / FPHMR18A3A

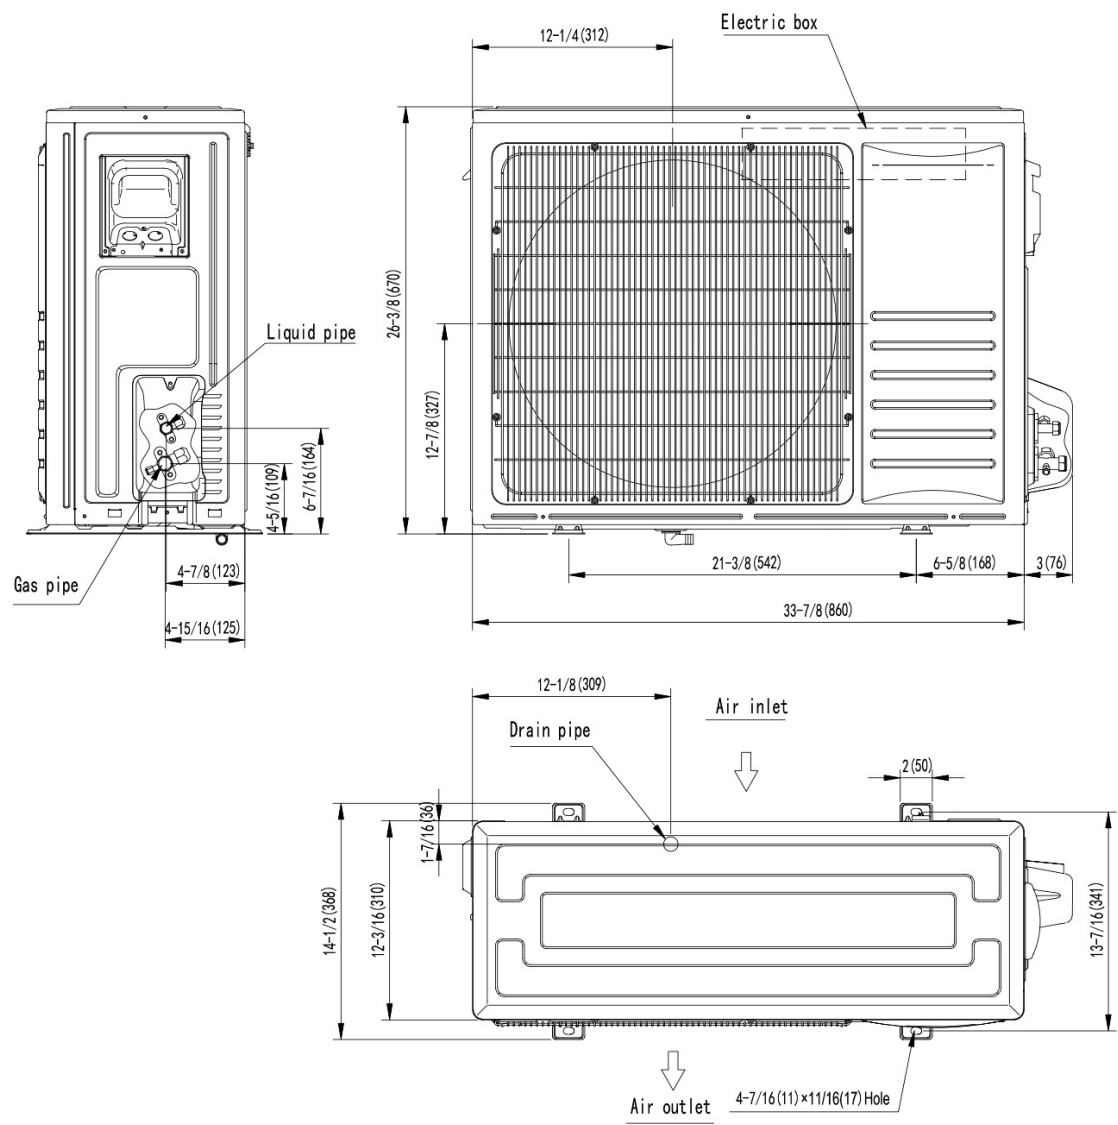

				Width	Depth	Height	
Model	L1 (in.)	L2 (in.)	L3 (in.)	L4 (in.)	L5 (in.)	L6 (in.)	L7 (in.)
FPHMR18A3A	21 11/32	12 19/32	34 7/8	33 7/8	12 3/16	25 9/16	13


DIMENSIONAL DRAWINGS

OUTDOOR UNITS / FPHMR24A3A

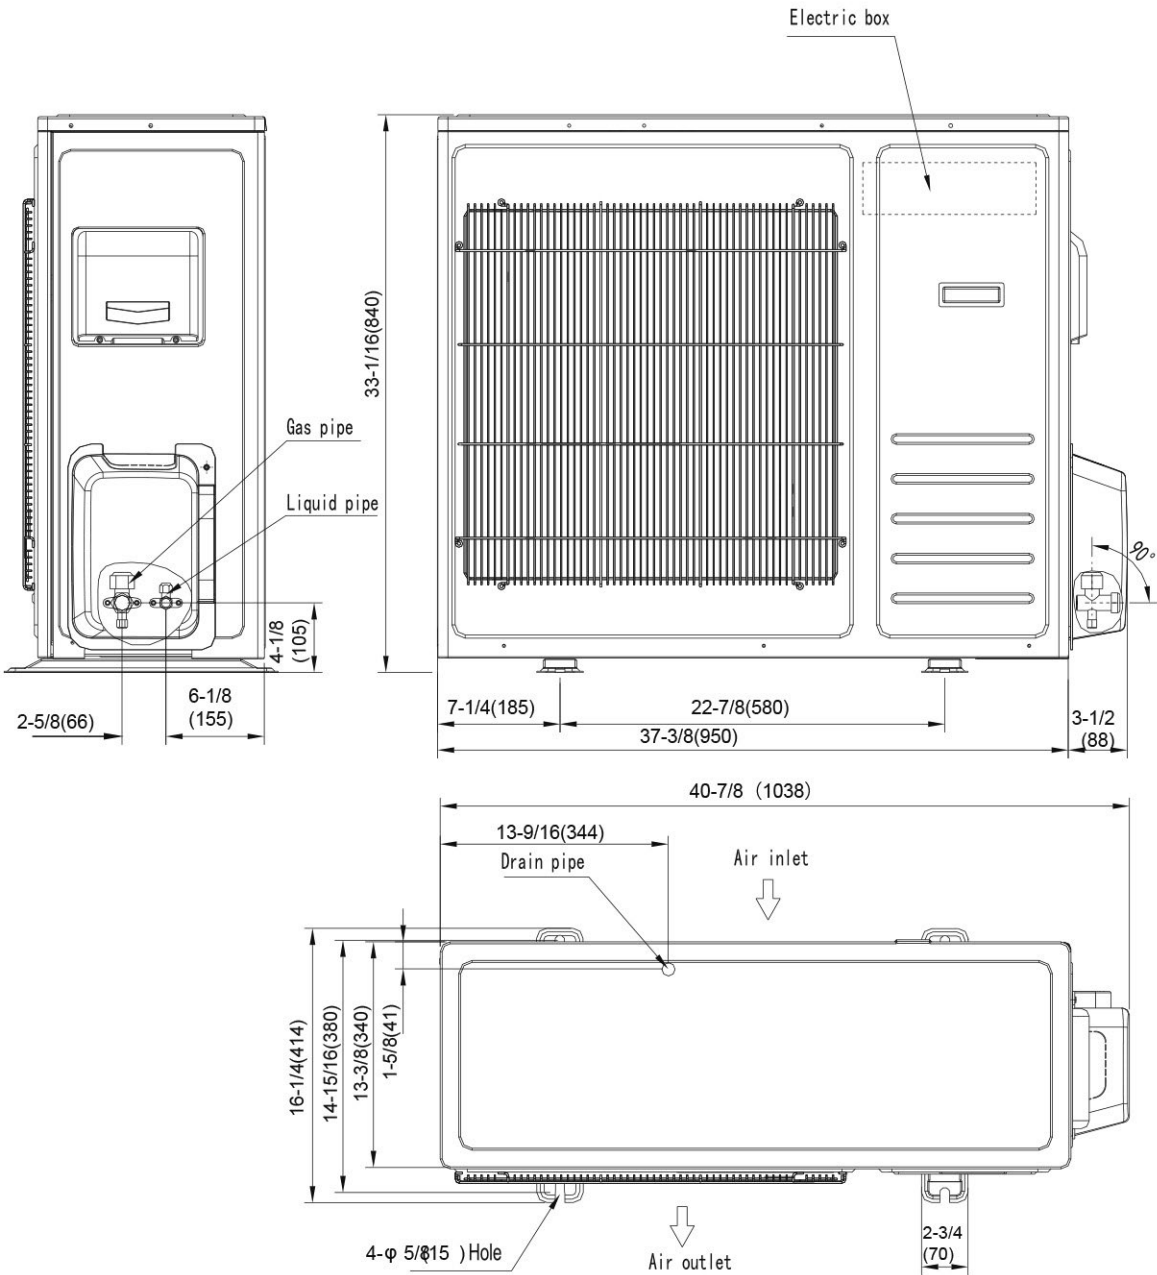

				Width	Depth	Height	
Model	L1 (in.)	L2 (in.)	L3 (in.)	L4 (in.)	L5 (in.)	L6 (in.)	L7 (in.)
FPHMR24A3A	26	12 19/32	37 3/4	34 7/8	14 3/8	31 5/16	16 5/16

DIMENSIONAL DRAWINGS **OUTDOOR UNITS / FPHMR368A3A**

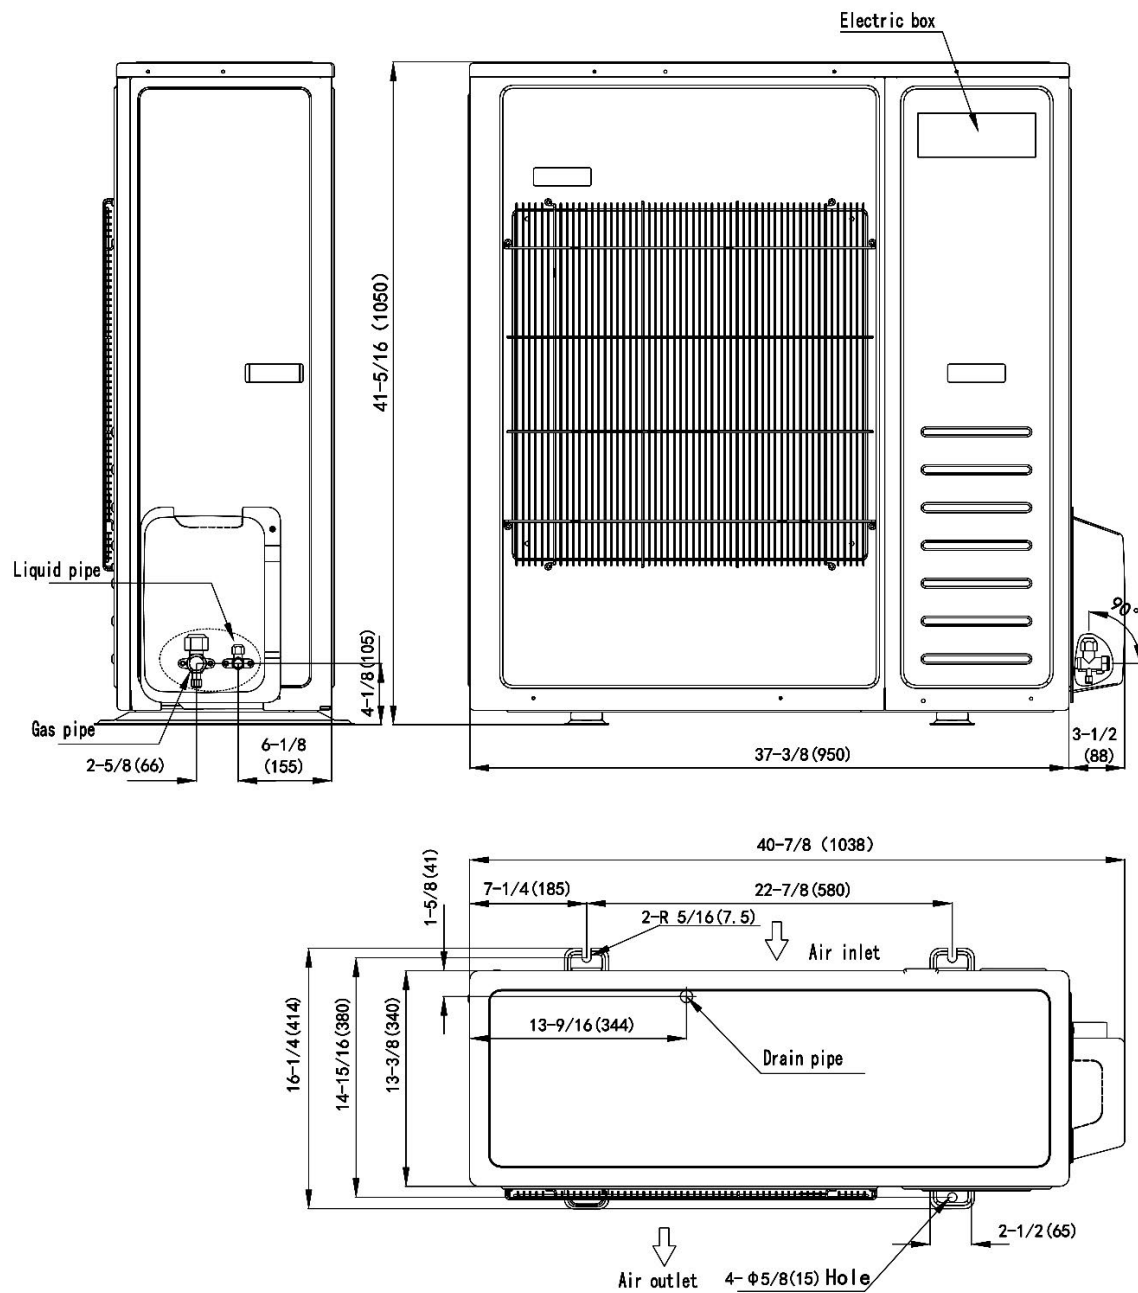

				Width	Depth	Height	
Model	L1 (in.)	L2 (in.)	L3 (in.)	L4 (in.)	L5 (in.)	L6 (in.)	L7 (in.)
FPHMR36A3A	21 11/32	12 19/32	34 7/8	33 7/8	12 3/16	25 9/16	13

ACCESSORIES

REFRIGERATION LINE SETS (REQUIRED) OUTSIDE DIMENSIONS

Floating Air® Pro Multizone Outdoor				
SYSTEM MODEL	Liquid	Suction	15' Lineset Kit	35' Lineset Kit
FPHMR18A3A	1/4	3/8	T32150	T32350
FPHMR24A3A	1/4	3/8	T32150	T32350
FPHMR36A3A	1/4	3/8	T32150	T32350

*Insulated line sets are available for all Friedrich split systems in 15 ft. and 35 ft. lengths. Each line set is equipped with flare nuts on both ends. Both liquid and suction lines are insulated. Line sets can be joined together with field supplied double male connectors. Each system requires one line set for each indoor unit installed.

REFRIGERATION LINE SETS MIN./MAX. LENGTHS

Floating Air® Pro Outdoor		
SYSTEM MODEL	Min. (ft.)	Max. Each/Total (ft.)
Floating Air® Pro Multi Zone Outdoor		
FPHMR18A3A	25	82/164
FPHMR24A3A	25	66/197
FPHMR36A3A	25	66/246

TORQUE WRENCH SETTINGS

Outside Diameter		Torque	
mm	inch	ft-lbs.	N·m
6.35	1/4	13 – 18	17.6 – 24.5
9.52	3/8	25 – 30	33.3 – 41.2
12.7	1/2	40 – 47	53.9 – 64.7
15.88	5/8	45 – 59	61.7 – 80.4

WALL CONTROLLER



FPWC1 Optional wired wall controller