




**NERAK Bulk Material Handling Equipment**  
**Continuous & Pendulum Bucket Conveyors**

**NERAK**



|| As experts in vertical conveying technology we offer the right solution for each individual application. And that means a cost-effective design as well as reliability and durability in operation.

Whenever vertical conveying is the topic of conversation today, the name NERAK springs to mind. Innovation and reliability of our continuous bucket conveyors in all fields of the bulk materials handling have made us a market and technology leader world-wide.

NERAK is on the scene if materials need to be conveyed on a 24/7 basis, with minimum amount of spillage – for a wide range of applications, including in the chemical, food, petfood, and heavy industries.

Careful design and material selection ensure low maintenance and long life for all components in the system.

This, together with in-house production, ensures constant high quality as well as fast and flexible reaction times. OEMs and end users alike focus on NERAK continuous bucket conveyors when looking for an efficient solution to their conveying problems – whether for a single solution or large project.

We can offer the complete package from initial layout through design, manufacture, assembly, installation to commissioning. We maintain close customer contact through our large global network of sales and service.




|| Our strengths are quality, flexibility and the rubber block chain.

At the heart of every NERAK conveyor is the heavy-duty rubber block chain. The rubber block chain gets its high tensile strength from embedded vulcanized steel cables.


The outstanding features of this chain are that it has no links, is silent-running, wear-resistant and virtually maintenance free, all excellent qualities further enhanced by its corrosion-free design.

Thanks to the silent operation of the rubber block chain, there is no noise annoyance at the workstations in the immediate vicinity of the conveyor.

Moreover, operation with the rubber block chain is extremely cost-effective as there is no need for lubrication, regular adjustment and re-tensioning. Maintenance costs are thus reduced to a minimum.

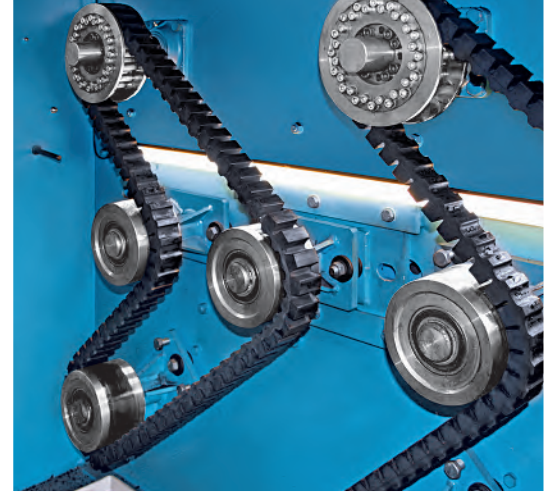

*The chain quality is subject to constant monitoring*

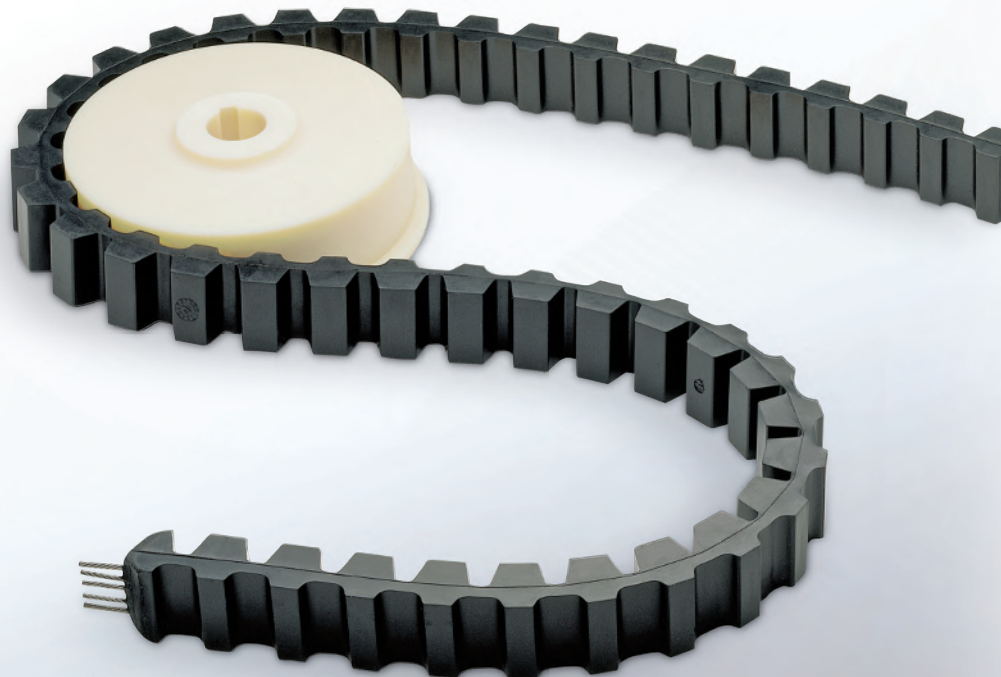

|| Continuous bucket conveyors are specially designed to convey bulk materials from one or more feed points to a central discharge. The conveying paths can be horizontal, vertical or inclining without any additional transfers.

Gentle handling, without product separation, and quiet operation make NERAK conveyors an ideal choice for all bulk materials – from delicate food products to abrasive and coarse mortars and cements.

### || Principle

The product is fed into the moving bucket belt at a controlled rate in a similar manner to feeding a normal belt conveyor. At the end of the conveyor, the buckets are emptied by gravity into the discharge section.

NERAK continuous bucket conveyors are very adaptable where space is limited. High throughputs can be achieved with low power requirements, and conveying heights over 50 m (165') are possible. The total conveying length is almost unlimited. At the same conveying capacity, continuous bucket conveyors take up considerably less space than pendulum bucket conveyors.

### || Bucket Belt

Two endless rubber block chains reinforced with steel cables are the driving element. The robust thick-walled plastic or steel buckets running between the parallel rubber chains are joined with flexible bucket strips to create a closed, gap-free and resilient conveying system. Of course, food-safe or conductive options are also available.


The relation between bucket width and pitch provides the best possible conditions for feeding and discharge. The materials of construction for all components make the NERAK bucket belt corrosion-free and largely chemically resistant, even with abrasive, humid or hot products at up to 220 °C (430 °F).

Design and material selection ensure continuous quiet running (65 dB A).

Modular design of the continuous bucket conveyors allows for rapid and cost-effective replacement of parts suitable for the particular application.

### || Feed Section


Depending on the application, the NERAK continuous bucket conveyor is equipped with one or more infeeds. The length of the feed opening is variable to suit the application, although the width is related to the bucket size. At the infeed, the product is fed into the buckets from the top at a controlled rate. Appropriate equipment can be supplied to provide a controlled rate of feed. The feed opening is sealed to the bucket belt.

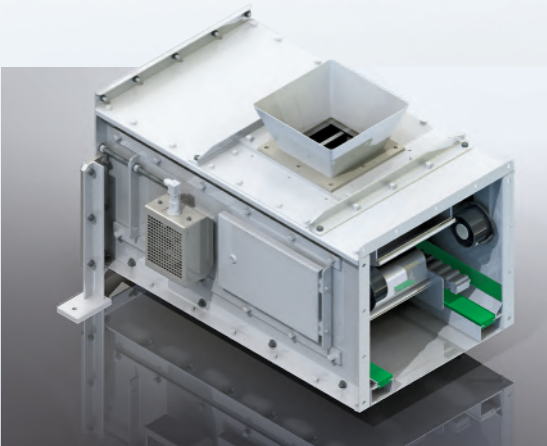


## Discharge Section

NERAK continuous bucket conveyors have just one discharge section. The length of discharge will be determined by the discharge characteristics of the product. A bucket knocker can assist product discharge from the buckets. Discharge chutes complete the connection to silos, packaging machines or other equipment in the production line.

The drive is mounted in the discharge section. A gear motor is either directly connected to the drive shaft or via a transmission chain. On the opposite side of the drive shaft a backstop bearing prevents the bucket belt from running back.

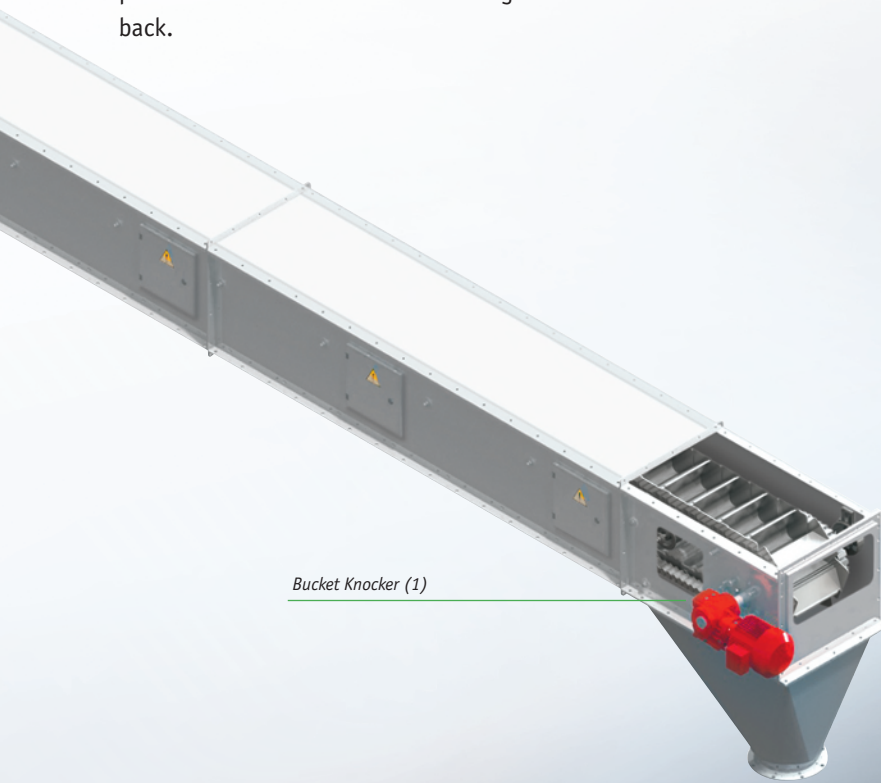


Bucket Knocker (1)

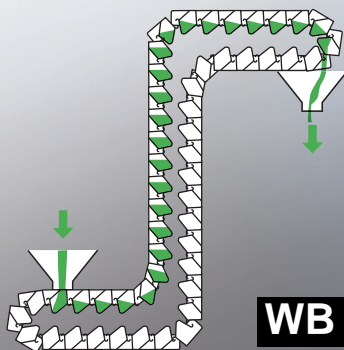


## Spillage


For some products NERAK continuous bucket conveyors can be supplied in a self-cleaning version: any product spillage in the bottom horizontal section is collected by the return strand of buckets and returned to the process. Alternatively, cleaning drawers, mesh or hinged bottom panels can be supplied.

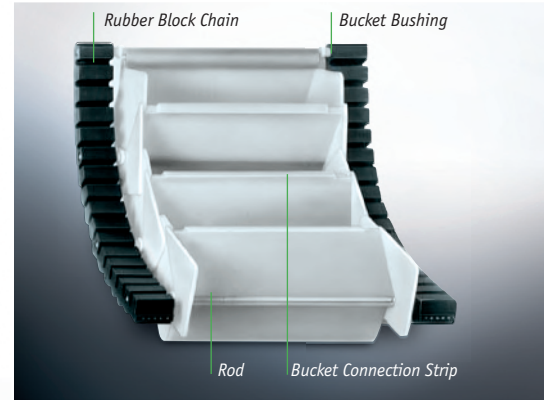

Bucket Belt Components and Rubber Block Chain

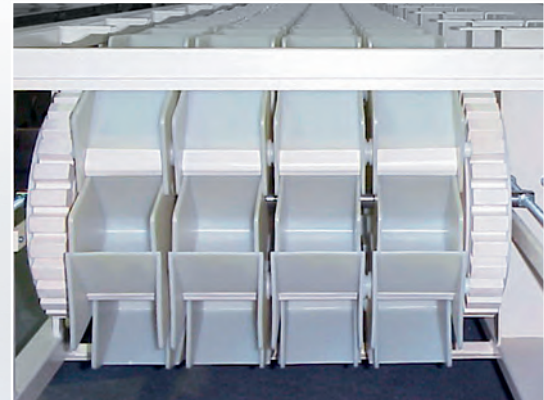

Multi-Compartment Bucket Belt at the Tensioning Unit

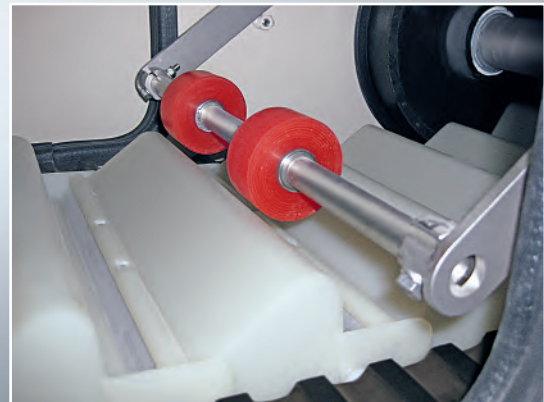

Bucket Knocker to Assist Product Discharge




Discharge Section of a WB 640 Conveyor with 30 kW (40 HP) Drive

|| Pendulum bucket conveyors are used to transport bulk materials from one or more feed points to any number of discharge points, and elevate them to different levels, as required.

## || Principle

As with the continuous bucket conveyor, the product is fed into the moving bucket belt at a controlled rate. At the end of the conveyor the buckets are emptied by tilting mechanisms that are pneumatically or electromechanically controlled.

The well developed system, in particular the sturdy design of the bucket belt make it ideal for the widest range of applications – ranging from careful handling of delicate foodstuffs to the transport of abrasive coarse material as used in heavy industry. Low power consumption and great flexibility are the distinguishing features of the system.

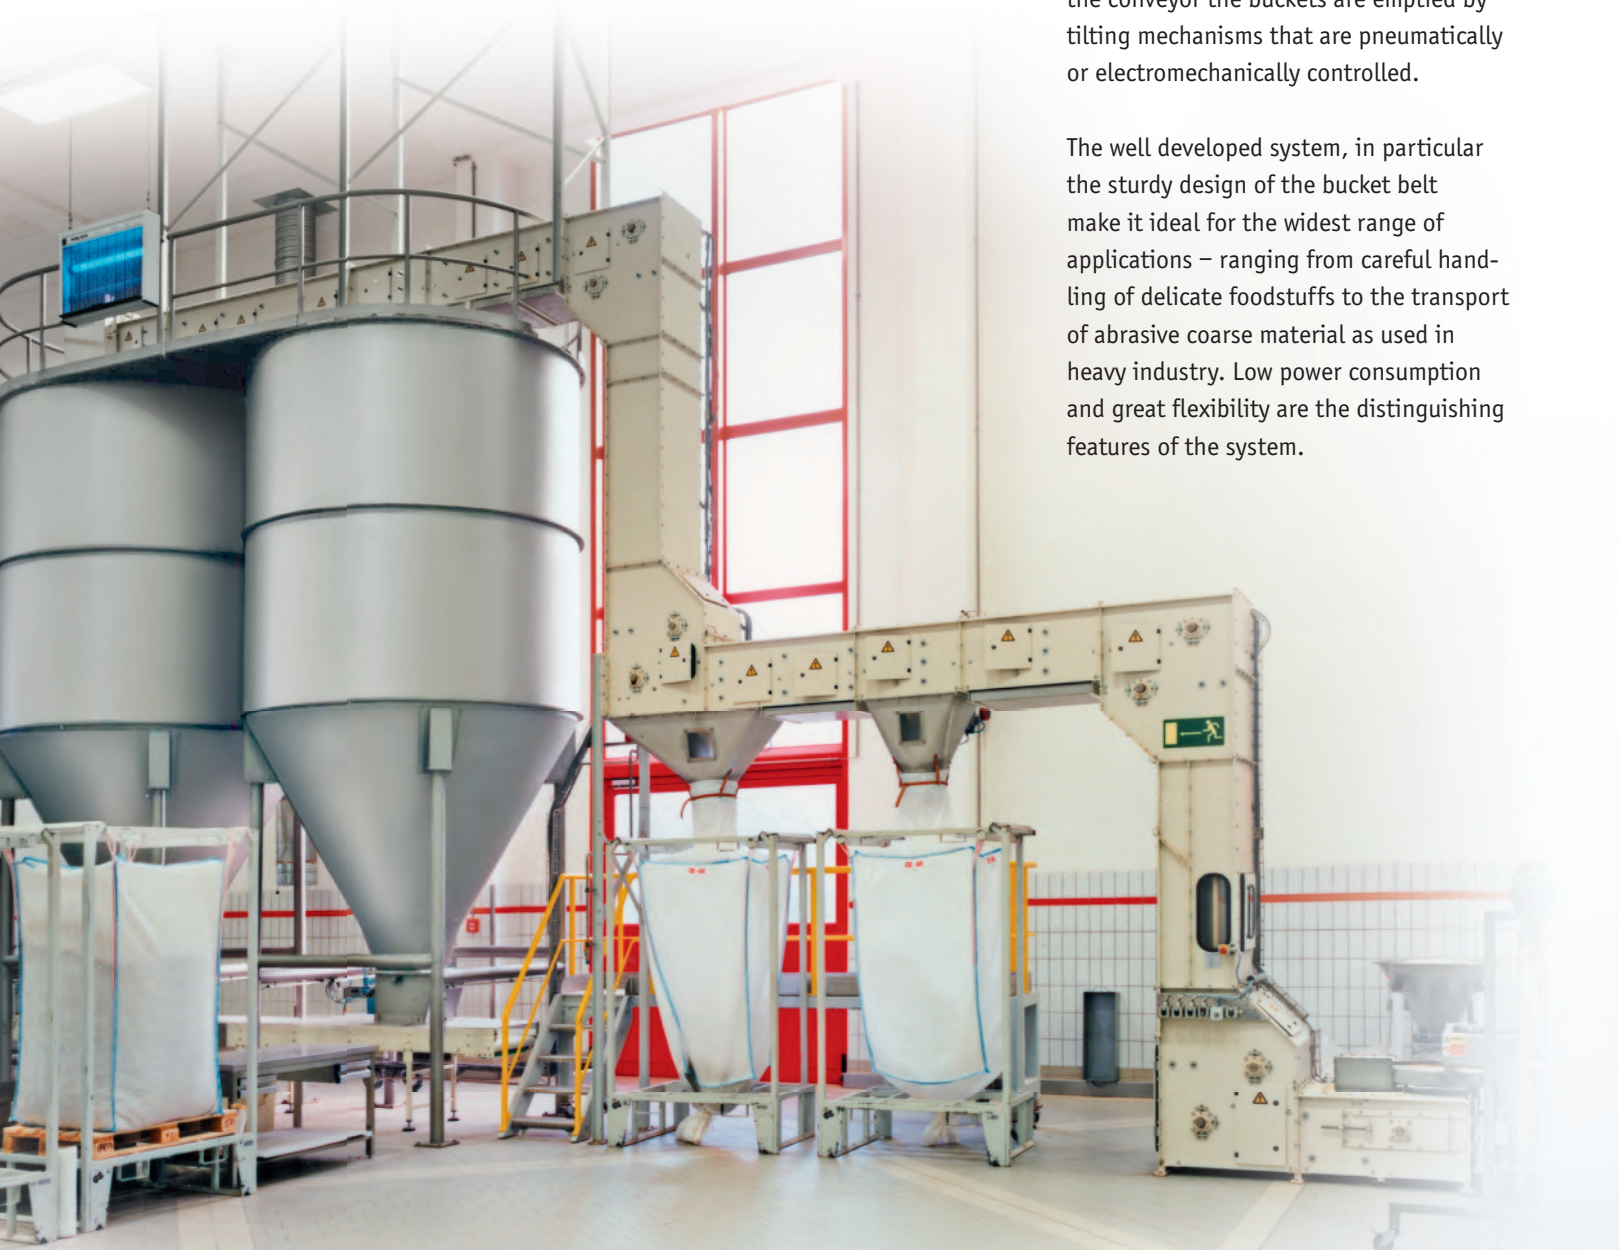

Feed point with silicon seal



The feed section can be as long as required



Transition from horizontal to vertical conveying

## || Bucket Belt

Two rubber block chains reinforced with steel cables provide the driving element. Running between the parallel rubber block chains, the robust pendulum buckets of plastic or steel are generally suspended in ball bearings. During the conveying operation, the bucket opening faces upwards. The bearings allow easy tilting of the buckets, thus ensuring optimum functional reliability.

The entire bucket belt is corrosion-free and does not require lubrication.

## || Feed Section



In the feed section the buckets overlap to form a gap-free bucket belt. Any number of feed inlets can be incorporated. The width of the bucket determines the width of the feed point. At the feed section, the product is fed into the moving bucket belt from the top in a controlled manner. The feed opening is sealed to the bucket belt.

## || Discharge Section

The NERAK pendulum bucket conveyor can be provided with any number of discharge points. The buckets are emptied by tilting mechanisms that are either pneumatically or electromechanically controlled. By tilting the buckets by up to 180°, the product is carefully discharged by gravity.

## || Drive System


A geared motor is either connected directly to the drive shaft or via a transmission chain. A backstop bearing is mounted separately on the drive shaft to prevent the filled bucket belt from running back.

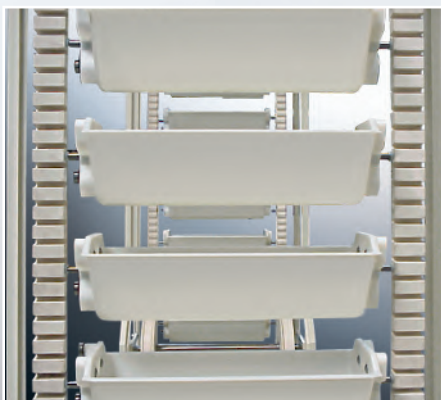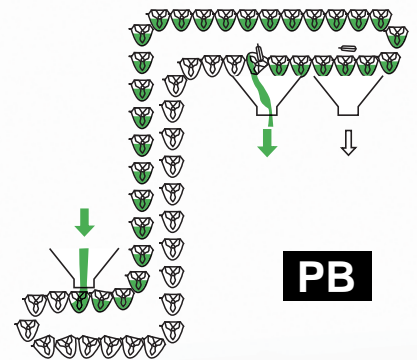

The product is conveyed vertically upwards



Pendulum bucket conveyors can have any number of discharge points

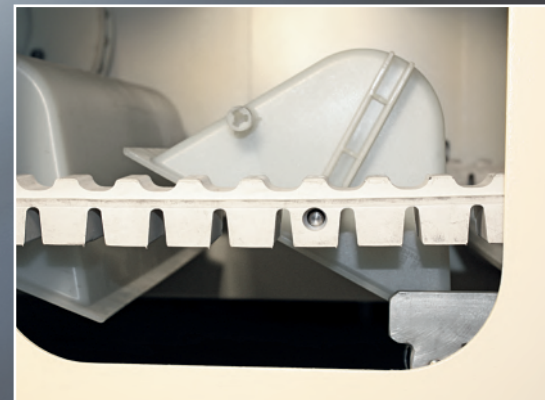


Buckets are emptied by the tilting mechanism

# NERAK Continuous and Pendulum Bucket Conveyors

|| NERAK offers design solutions specific to customer requirements.

Bucket conveyor casings are built from mild or stainless steel in open, dust-tight, water-tight, gas-tight or pressure shock-resistant structures.

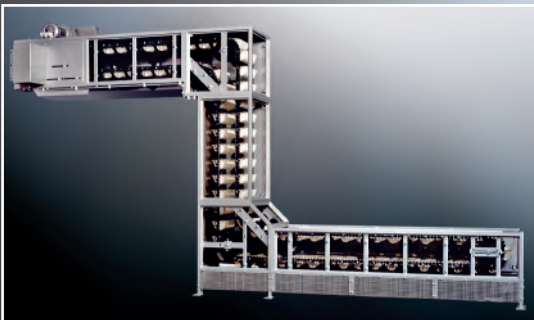

*Tubular frame with removable panels*



*Gas-tight horizontal pendulum bucket conveyor*



*Heavy-duty open frame structure*




## || Structure

- Robust, enclosed sheet metal structure for heavy-duty applications.
- Enclosed sheet metal structure with large removable panels in the horizontal sections for greater accessibility.
- Sturdy open profile structure for use in the steel industry.
- Gas-tight applications in the chemical industry.
- Open frame construction with removable mesh panels for fast and easy cleaning in the food industry.
- Elegant tubular frame structure – used mainly for packaging and weighing applications.



*Sturdy steel-plate structure*

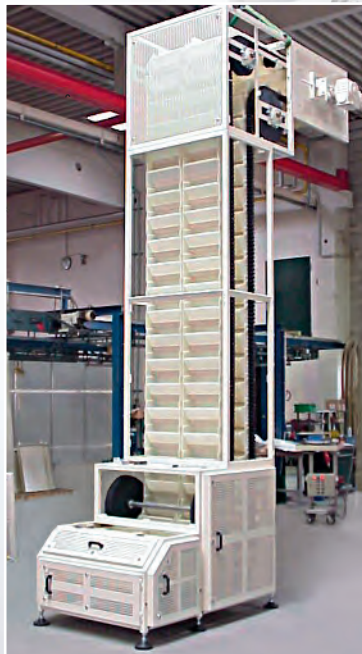




*Open frame structure*



**A tailored solution for every application.**

**Extensive Range of Options**

- Conveyors in accordance with ATEX
- Gas-tight design
- Integrated weighing
- Cleaning systems with air
- Clean-in-Place (CIP) wet cleaning
- Buckets made from mild or stainless steel
- Buckets made from detectable plastic, suitable for food and petfood
- Fire protection closures
- Feeding and discharge equipment
- Etc.

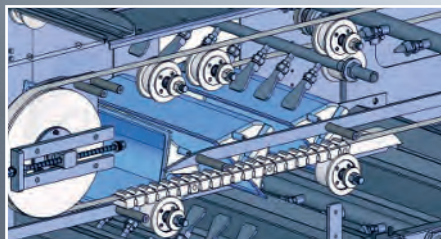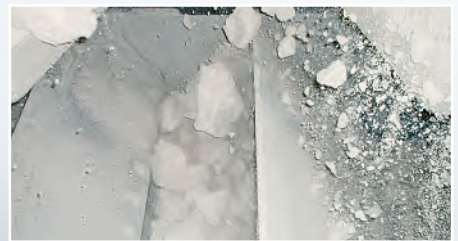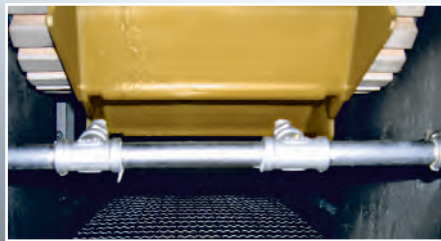

|| NERAK's bucket conveyor technology provides conveying solutions for a tremendous range of materials.

|| **Cements etc.**

- Cements
- Clay
- Grouts
- Gypsum
- Perlite
- Plaster
- Quartz Sand
- Mortars

|| **Chemicals**

- Aluminum Oxide
- Barium
- Battery Mass
- Carbon Black
- Catalysts
- Detergents
- Fertilizers
- Fiberglass
- Phosphate
- Resins
- Silica
- Sodium Carbonate
- Sulphur Pills
- Urea
- Zeolite

|| **Food Products**


- Baking Soda
- Bread Crumbs
- Cereals
- Chewing Gum
- Chocolate bars
- Cocoa Beans
- Coffee Beans
- Dumplings
- French Fries
- Frozen Vegetables
- Instant Tea
- Jelly Beans
- Marshmallows
- Nuts
- Olives
- Pasta
- Peanut Puffs
- Pet Food
- Potato Chips
- Puffed Rice
- Pulses
- Rice
- Salts
- Salt Tabs
- Sesame Seeds
- Soy Beans
- Sugar
- Tobacco
- Tea

|| **Heavy Industry**



- Caustic Lime
- Coal
- Filter Dust
- Iron Ore
- Iron Powder
- Limestone
- Refractory Sands
- Silicon

|| **Miscellaneous**

- Activated Carbon
- Broken Glass
- Cat Litter
- Coins
- Cork
- Corundum
- Dried Sludge Pellets
- Electronic Scraps
- Rubber Granules
- Seeds
- Screw Caps
- Spray Grain
- Tennis Balls
- Thermoplastic Pellets and Powders
- Toner
- Wooden Pellets
- etc.

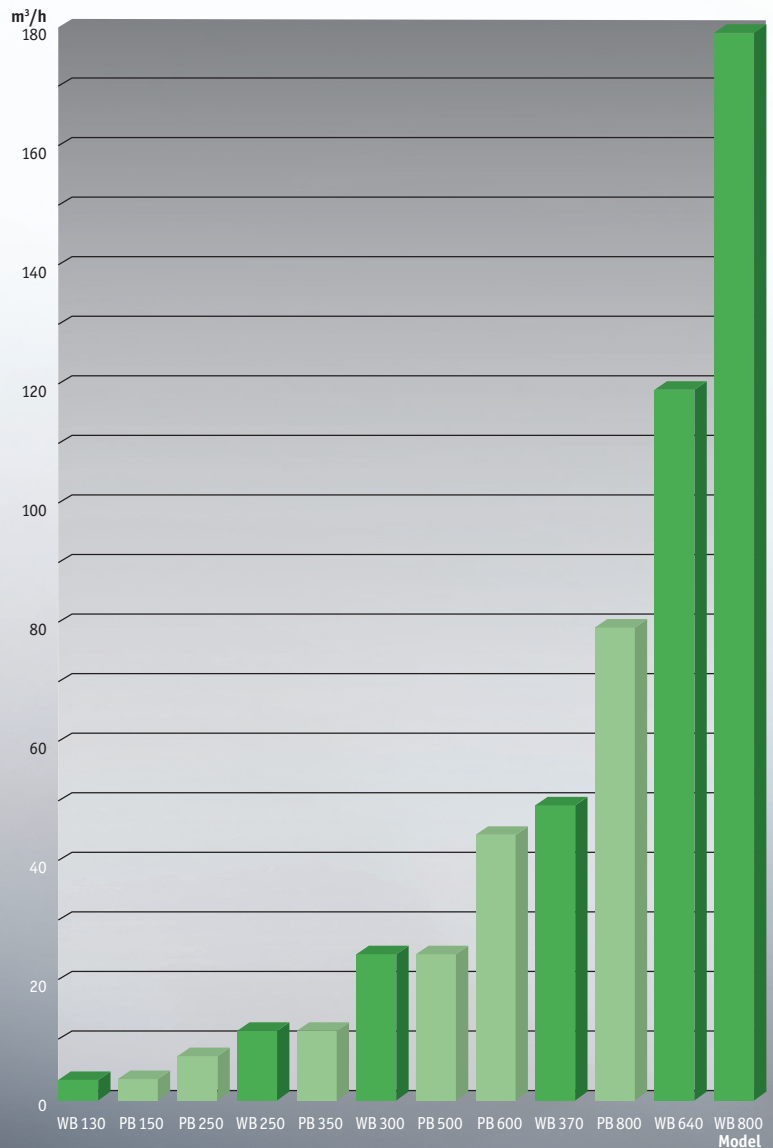

For data sheets and CAD drawings, please visit our website:  
[www.nerak-systems.com](http://www.nerak-systems.com)

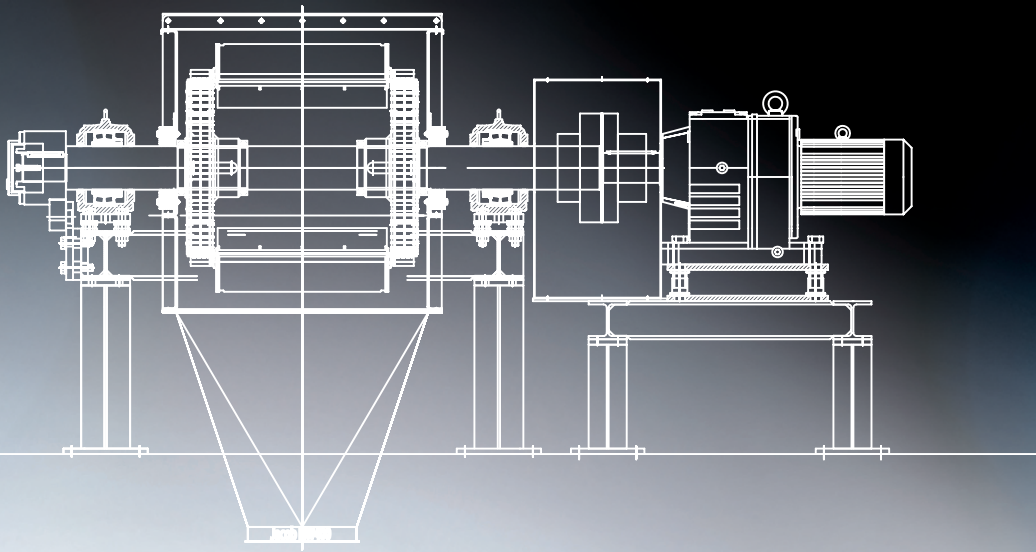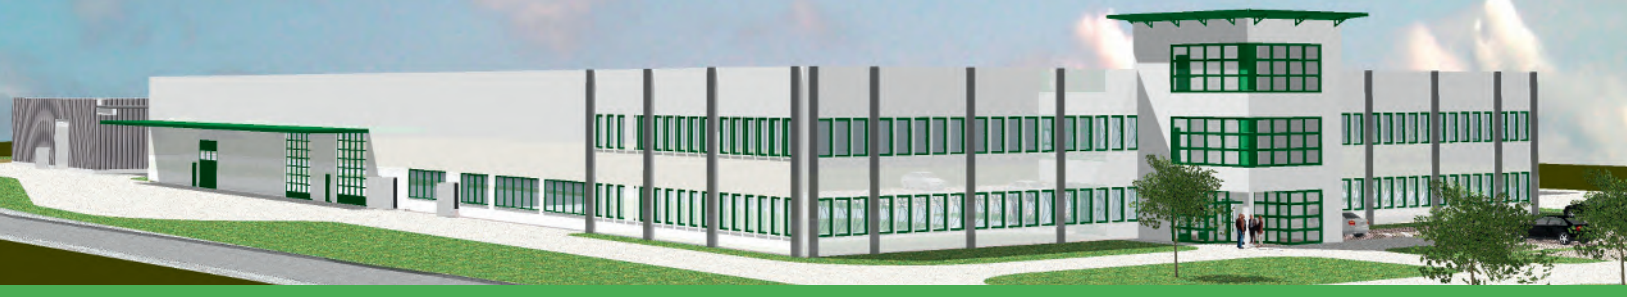

# NERAK

## || Sales Offices and Service Centers

- Australia
- Belgium
- Brazil
- China
- Czech Republic
- Denmark
- Finland
- France
- Greece
- India
- Indonesia
- Israel
- Italy
- Japan
- Korea
- Malaysia
- Netherlands
- Norway
- Austria
- Poland
- Russia
- Sweden
- Switzerland
- Spain
- Turkey
- United Kingdom
- United Arab Emirates

## NERAK FÖRDERTECHNIK

**Headquarters**  
**NERAK GmbH Fördertechnik**  
Brigitta 5  
D-29313 Hambühren, Germany  
Phone +49-5084-944-0  
Fax +49-5084-944-222  
info@nerak.de  
www.nerak.de

## NERAK SYSTEMS

**USA Offices & Factory**  
**NERAK Systems Inc.**  
4 Stagedoor Road  
Fishkill, NY 12524  
Phone +1-914-763-8259  
Fax +1-845-896-1925  
info@nerak-systems.com  
www.nerak-systems.com