

ServerSwitchIQ™ Professional with RAID

Video recording appliance with automated cybersecurity

Enterprise-class storage • Redundant Power • RAID • 600 Mbps • Up to 128TB

Razberi ServerSwitchIQ™ Professional is a purpose-built video appliance that integrates a server, surveillance-class storage and a managed PoE switch. Part of a complete suite of appliances that provide security leaders with unmatched video recording, scalability, reliability, cloud-based health monitoring and automated cybersecurity.

Built for security, engineered for performance, open architected and optimized to reduce the impact of megapixel cameras on the network.



ServerSwitchIQ Pro 24 Port, up to 72TB
1U form factor



ServerSwitchIQ Pro 24 Port, up to 128TB
2U form factor

RAZBERI SERVERSWITCHIQ™ APPLIANCES

Intelligent, high performance video surveillance recording appliances that are more than an NVR

Purpose-built design to support megapixel camera resolutions

All-in-one server, managed PoE switch and storage

Open platform, certified with leading VMS and analytics partners.

KEY FEATURES

- Intel Xeon Processor
- 24 PoE+ ports with up to 440W total output
- Redundant power supply (2U form factor)
- RAID controller with memory cache and powerfailure protection
- Video storage up to 128TB using enterprise-class HDDs
- Razberi CameraDefense™ automated camera hardening

KEY BENEFITS

IT Friendly


Store video at edge to reduce impact on IP networks by up to 95% without compromising quality.

Remotely Monitor and Manage

Remotely manage with less staff and fewer costly truck rolls with Razberi Monitor. Monitor system health and cyber security.

Cybersecure

Automatically harden cameras with built-in CameraDefense. Protect the video server with ApplianceDefense™, AI-based antivirus and malware protection that does not compromise VMS performance.

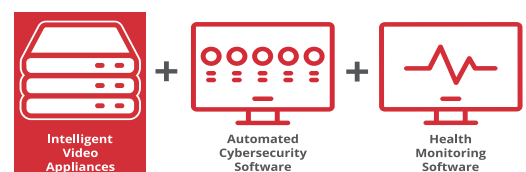

Razberi ServerSwitchIQ™ Professional with RAID SPECIFICATIONS



Razberi ServerSwitchIQ™ Professional with RAID Specifications

Intelligent Features	Razberi Monitor™ health monitoring Razberi CameraDefense™ automated camera hardening Razberi ApplianceDefense™ antivirus and malware protection	Uplinks	2 x 10/100/1000 Mbps Combo SFP 2 x 10/100/1000 Mbps RJ-45
Processor	Intel Xeon E3-1275v3 Processor Passmark: 9901	Video Out	HDMI (3840 x 2160 Max.) VGA (2048 x 1536 Max.)
Operating System	Windows 10 Enterprise 2019 LTSC Windows Server 2016	USB	2 x USB 3.0 (rear), 2 x USB 2.0 (front)
Boot Drive	256GB mSATA	eSATA	Yes
Memory	16 GB DDR3	Input Voltage	90 to 265 VAC
Graphics	Intel HD Graphics P4600 w/Quick Sync Support	Typical Current	500W supply 8.2A @ 115 VAC 750W supply 12A @ 115 VAC
Switch Control	HTTPS Browser Interface Layer 2 Switching VLAN Management	Switch Fabric	4.4 Gbps, full mesh with zero packet loss
PoE	IEEE 802.3af, IEEE 802.3at (PoE+), up to 30W per port	HDDs	3.5 inch Enterprise class, native 4K sectors 2, 4, 6, 8, 10, 12, 14, 16, 18TB
RAID	0/1/5/6/10/JBOD	RAID Controller	1 or 2 GB DDR4/2100 MHz cache Cache power-failure protection Support for native 4K sectors
Operating Environment	0°C to 45°C (32°F to 113°F) 10% to 90% RH Non-condensing	Certifications	FCC, RoHS, FCC Part15 Class A, CISPR22, EN 55022: Class A, EN 6100-3-2, EN 61000-3-3, EN 55024, EN 60950-1

Razberi ServerSwitchIQ™ Professional with RAID Model-Specific Table (Standard PoE Output)

Part Number	Total PoE Output	Storage (TB)	RAID Cache DDR4	Processor	Memory (DDR3)	Power Supply	Dimensions (L x W x H)	Heat Load BTU/hr.	Mounting	Weight
Razberi ServerSwitchIQ Professional with RAID (24 PoE Ports, 1U)										
SSIQ24P-2-XE-16T	266 W	16 TB (4 x 4TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-24T	266 W	24 TB (4 x 6TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-32T	266 W	32 TB (4 x 8TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-40T	266 W	40 TB (4 x 10TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-48T	266 W	48 TB (4 x 12TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-56T	266 W	56 TB (4 x 14TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-64T	266 W	64 TB (4 x 16TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24P-2-XE-72T	266 W	72 TB (4 x 18TB)	1 GB	Xeon E3	16 GB	1 x 500W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
Razberi ServerSwitchIQ Professional with RAID (24 PoE Ports, 2U)										
SSIQ24P2U-2-XE-48T	230 W	48TB (8 x 6TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24P2U-2-XE-64T	230 W	64TB (8 x 8TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24P2U-2-XE-80T	230 W	80TB (8 x 10TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24P2U-2-XE-96T	230 W	96TB (8 x 12TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24P2U-2-XE-112T	230 W	112TB (8 x 14TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24P2U-2-XE-128T	230 W	128TB (8 x 16TB)	2 GB	Xeon E3	16 GB	2 x 500W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds

Contact us for a demonstration or more information
Phone: 860-271-0944
Hours: M-F 8:00 AM to 5:00 PM ET



sales@razberi.net
customerservice@razberi.net
technicalsupport@razberi.net

Razberi ServerSwitchIQ™ Professional with RAID SPECIFICATIONS



Razberi ServerSwitchIQ™ Professional with RAID Model-Specific Table (Optional Upgraded PoE Output)

Part Number	Total PoE Output	Storage (TB)	RAID Cache DDR4	Processor	Memory (DDR3)	Power Supply	Dimensions (L x W x H)	Heat Load BTU/hr.	Mounting	Weight
Razberi ServerSwitchIQ Professional with RAID (24 PoE Ports, 1U)										
SSIQ24PX-2-XE-16T	440 W	16 TB (4 x 4TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-24T	440 W	24 TB (4 x 6TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-32T	440 W	32 TB (4 x 8TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-40T	440 W	40 TB (4 x 10TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-48T	440 W	48 TB (4 x 12TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-56T	440 W	56 TB (4 x 14TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-64T	440 W	64 TB (4 x 16TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
SSIQ24PX-2-XE-72T	440 W	72 TB (4 x 18TB)	1 GB	Xeon E3	16 GB	1 x 750W	21.2 x 17.2 x 1.75 in; 538 X 438 x 44 mm	570	Rack Ears	22.9 pounds
Razberi ServerSwitchIQ Professional with RAID (24 PoE Ports, 2U)										
SSIQ24PX2U-2-XE-48T	440 W	48TB (8 x 6TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24PX2U-2-XE-64T	440 W	64TB (8 x 8TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24PX2U-2-XE-80T	440 W	80TB (8 x 10TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24PX2U-2-XE-96T	440 W	96TB (8 x 12TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24PX2U-2-XE-112T	440 W	112TB (8 x 14TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds
SSIQ24PX2U-2-XE-128T	440 W	128TB (8 x 16TB)	2 GB	Xeon E3	16 GB	2 x 750W	21.2 x 17.2 x 3.50 in; 538 X 438 x 88 mm	766	Rack Rails	40.1 pounds

Razberi ServerSwitchIQ™ Professional with RAID Performance Specifications

Maximum Recording Datarate (Mbps)	Configuration	Maximum Cameras
600	RAID 6	150 x 4Mbps

Test results using Milestone XProtect while mainting CPU utilization less than 70% and memory utilization less than 40%.

Contact us for a demonstration or more information
 Phone: 860-271-0944
 Hours: M-F 8:00 AM to 5:00 PM ET



sales@razberi.net
 customerservice@razberi.net
 technicalsupport@razberi.net