

Silt Boom - SB650 (CB650 + geotextile)

Silt Boom are designed to prevent silt contamination of waterways caused by manmade or natural erosion, these fast to assemble and deploy booms are ideal for sheltered and inland waters.



SPECIFICATIONS

Freeboard	250mm
Draft	400mm + geotextile 2500mm, 5000mm or custom size
Overall	3150mm / 5650mm
Section length	25m or custom lengths
Buoyancy to weight	4:1
Weight	2.6kg + geotextile per metre
Packaging Volume	0.9m ³ per 25m + geotextile
Ballast	8mm galvanised chain + 4mm chain for geotextile
Breaking strength	ASTM D 5035 (lengthwise & width wise 300kgf/5cm)
Operational Temperature	0°C to +60°C
Fabric	900-1300gsm woven polyester scrim coated PVC
Colour	Orange
Connection	Boom ASTM (standard 1500kgf/5cm) - Geotextile Velcro



EMPTEEZY LTD.


Muir Road Houston Industrial Estate Livingston EH54 5DR

Tel: +44 (0)1506 430309 Fax: +44 (0)1506 441466

e-mail: sales@empteezy.co.uk | www.empteezy.co.uk

Registered in Scotland 100049

BOOM MAKE-UP

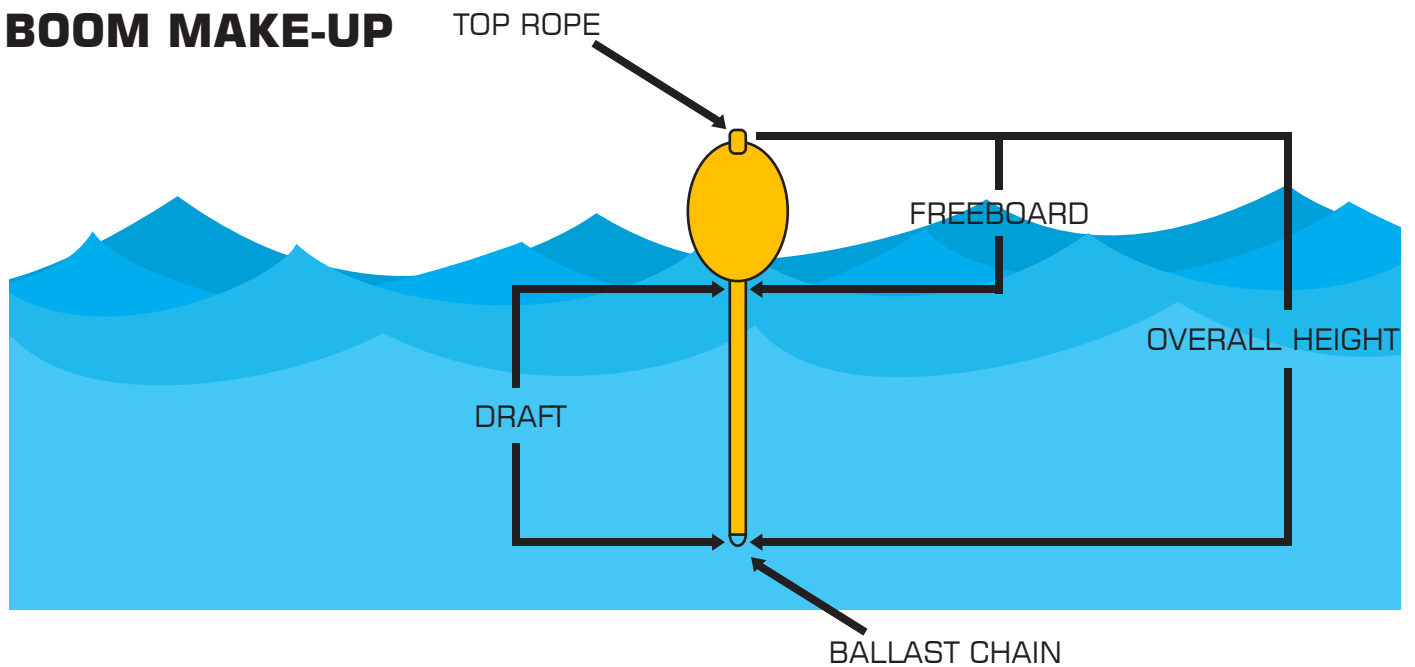

BOOM REQUIREMENT DEPENDENT ON THE WATER SPEED

CURRENT SPEED IN KNOTS	BOOM TO BANK ANGLE	LENGTH OF BOOM IN RELATION TO WIDTH OF RIVER
0.7	90°	1 times
1	45°	1.4 times
1.5	30°	2 times
2	20°	3 times
2.5	16°	3.5 times
3	15°	4.3 times
3.5	11°	5 times
4	10°	5.7 times
4.5	8°	7 times

EMPTEEZY LTD.

Muir Road Houstoun Industrial Estate Livingston EH54 5DR

Tel: +44 (0)1506 430309 Fax: +44 (0)1506 441466

e-mail: sales@empteezy.co.uk | www.empteezy.co.uk

Registered in Scotland 100049