




## RAD 600 INSTRUCTIONS

1. Determine how many gallons of Holganix is needed for your fill.
2. Open Yellow Fill Valve A & B to "FILL" position.
3. Reset GPI Meter by holding button down while on "TOTAL 1" setting until you "zero out" the GPI meter.
4. Hold Momentary Switch on until desired gallons is reached on meter.
5. Turn yellow valves to "OFF" position - IMPORTANT!!!
6. See Inductor Bowl Instructions.

**\*\*\*FOR JUG FILL**

1. Follow Step 1 above
2. Open Yellow Valve A and Hose Valve  
(keep Yellow Valve B closed)
3. Follow steps 3 through 6 above

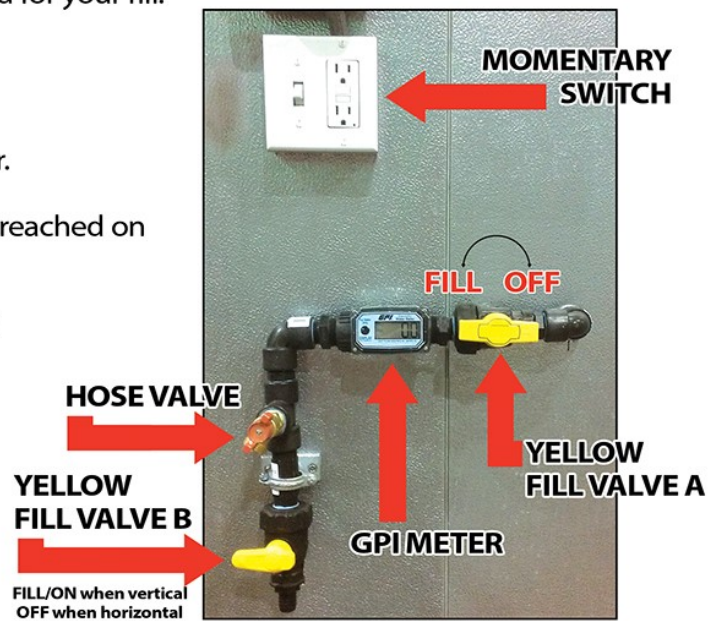

Any questions or concerns, please call Holganix at 866-563-2784 or email [SUPPORT@holganix.com](mailto:SUPPORT@holganix.com)