

Canon

CANON SOLUTIONS AMERICA

 **imageRUNNER**
ADVANCE
C3330i/C3325i

BIG CAPABILITIES IN A SMALL FOOTPRINT

PERFORMANCE

- Print up to 30 ppm in black and white and color
- Scan up to 55 ipm (300 dpi) (BW/color, simplex)
- Print up to 12" x 18"
- 2,300-sheet maximum paper capacity

FEATURES

- Compact, multifunction device
- Outstanding usability and intuitive touch-screen
- Reliable and cost-efficient
- V² Color for vivid, high-quality output
- Flexible finishing options in a small footprint
- Low energy consumption



 **CANON SEE IMPOSSIBLE**

Today's fast-paced business world requires the continuous, integrated flow of information and new levels of productivity. Designed with this in mind, the imageRUNNER ADVANCE devices work seamlessly with Canon's portfolio of solutions and services to streamline workflow and empower users. Now the imageRUNNER ADVANCE C3300 Series offers small workgroups access to powerful information management solutions. Impressively compact and cost-effective, these multifunction color devices can change the way you work.

EASY PRODUCTIVITY

Boost your productivity with a range of smart features. The intuitive and customizable interface helps streamline work by combining routine tasks at the touch of a button. Hard-copy documents can be scanned and converted into easily editable formats, including Microsoft® Word, PowerPoint®, or searchable Adobe® PDF files. Integrate documents into your existing business processes, and even access information directly from certain cloud applications. These models also support printing from and scanning to Android® or Apple® mobile devices.

AFFORDABLE PERFORMANCE

To help your bottom line, the imageRUNNER ADVANCE C3300 Series helps minimize costs and maximize reliability. The efficient product design, along with Canon's high-yield consumables, help achieve a low cost per page and a low total cost of ownership. And with outstanding uptime and easy maintenance, you can enjoy consistent productivity.

POWERFUL INTEGRATION

These models can seamlessly integrate into your imageRUNNER ADVANCE network of devices. Consistent design and operation help users quickly master the Series. Effortlessly install, replace, and migrate settings for devices across your network. Use Canon's advanced management tools to help you control costs by tracking usage and influencing user behavior. And, take advantage of Canon's extensive portfolio of solutions and services to support your unique workflow needs.

AN EXCELLENT FIT


Compact yet powerful, the imageRUNNER ADVANCE C3330i/ C3325i models are an excellent fit in smaller environments. Easily handle a range of printing tasks from envelopes to sheets up to 12" x 18". The inner finisher option can bind documents with either a staple or an environmentally conscious, staple-free closure.

Designed for:

- Small Offices
- Departments within Large Organizations
- Hospitals and Doctors' Offices
- Law Offices
- Educational Institutions



CONFIGURATION

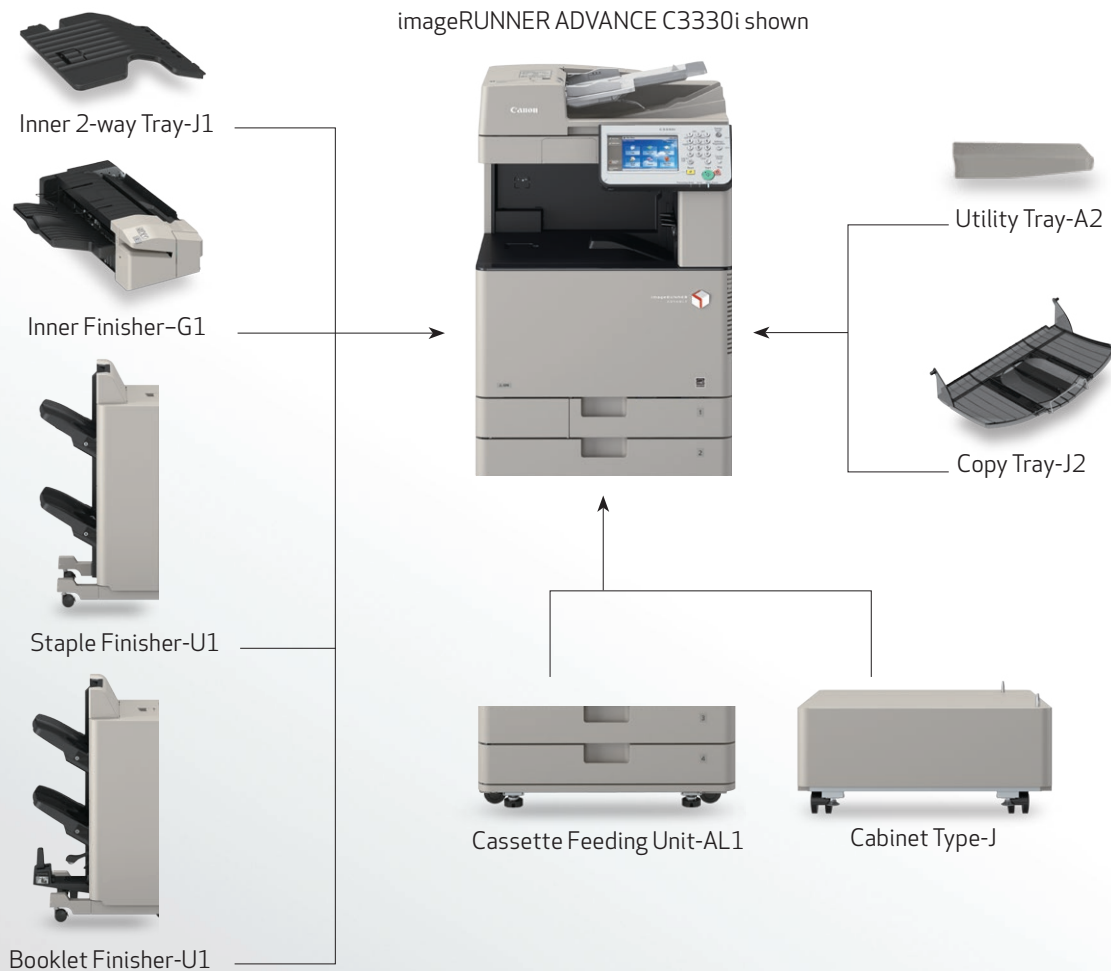

Main Unit

Hardware

- 100-sheet Duplex Automatic Document Feeder
- Two 550-sheet Cassettes
- 100-sheet Stack Bypass

Print Drivers

- UFR II
- PCL
- Adobe® PostScript® 3™

Color Universal Send

Remote Operator's Kit

Paper Handling Options

Cassette Feeding Unit-AL1

- 550-sheet x 2 cassette capacity
- 17 lb. Bond to 80 lb. Cover
- Supports up to 12" x 18"

Cabinet Type-J

Finishing Options

Copy Tray-J2

Inner 2-way Tray-J1

Inner Finisher-G1

- 600-sheet capacity
- Corner and double stapling, up to 50 sheets

- Staple-Free stapling, up to 5 pages of 17 lb. Bond
- Staple On Demand, up to 40 sheets of 20 lb. Bond

Staple Finisher-U1

- 2,100-sheet capacity (max.)
- Corner and double stapling, up to 50 sheets

Booklet Finisher-U1

- 2,100-sheet capacity (max.)
- Corner and double stapling, up to 50 sheets
- Booklet-making, up to 16 sheets

MAIN UNIT

Operation Panel: 7" WVGA Full-Color TFT Screen

Memory: 2 GB RAM

Hard Disk Drive: 215 GB

Network Interface Connection

Standard: 1000Base-T/100Base-TX/10Base-T

Optional: Wireless LAN (IEEE 803.1x via third-party adapter)

Other Interface

Standard: USB 2.0 (Host) x 2, USB 2.0 (Device)

Optional: Device Port [USB 2.0 (Host) x 2], Copy Control Interface

Copy/Print Speed (BW/Color)

Letter: C3330i: Up to 30/30 ppm
C3325i: Up to 25/25 ppm

Legal/

11" x 17": Up to 15 ppm

First-Copy-Out Time (Letter)

As fast as 5.9 Seconds (BW) and 8.2 Seconds (Color)

Paper Sources (20 lb. Bond)

Standard: Two 550-sheet Paper Cassettes
100-sheet Stack Bypass

Maximum: 2,300 Sheets

Output Paper Capacity (20 lb. Bond)

Standard: Up to 350 Sheets (Inner Tray)

Maximum: Up to 2,100 Sheets (w/Staple Finisher or Booklet Finisher)

Output Paper Sizes

Cassette 1: Statement-R, Letter, Executive

Cassettes

2/3/4: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size (5-1/2" x 7-1/8" to 12" x 18"), Envelopes*

Bypass: 12" x 18", 12-5/8" x 17-11/16", 11" x 17",

Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size (3-7/8" x 5-1/2" to 12-5/8" x 18")

Acceptable Paper Weights

Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Bypass: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)

Warm-Up Time

From Power On: 34 Seconds

From Sleep: 10 Seconds

Quick Startup Mode: 7 Seconds**

Power Requirements/Plug

120V AC, 60 Hz, 7.5A/NEMA 5-15P

Dimensions (H x W x D)

34-5/8" x 22-1/4" x 27-5/16"
(878 mm x 565 mm x 693 mm)

Installation Space (W x D)

35-1/4" x 44" (894 mm x 1117 mm)

Weight: Approx. 163.4 lb. (74.1 kg)**

Toner (Estimated Yield @ 5% Coverage)

Black: 36,000 Images

Color (C,M,Y): 19,000 Images

DOCUMENT FEEDER

Scan Method

Duplex Automatic Document Feeder

Acceptable Originals

Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement, or Statement-R

Scan Speed (BW and Color; Letter)

Simplex: Up to 55 ipm (300 dpi)/
Up to 30 ipm (600 dpi)

Duplex: Up to 27.5 ipm (300 dpi)/
Up to 15 ipm (600 dpi)

Paper Capacity: Up to 100 Sheets (20 lb. Bond)

PRINT SPECIFICATIONS

Maximum Engine Resolution: 1200 x 1200 dpi[▲]

PDL Support^{▲▲}

Standard: UFR II, PCL 5c/6, Adobe PostScript 3

Direct Print Support

Standard: TIFF, JPEG, PDF, XPS[†], EPS^{††}

UNIVERSAL SEND SPECIFICATIONS

Sending Method

E-mail, I-Fax, File Server (FTP, SMB, WebDAV), Super G3 Fax (Opt.)

Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV

E-mail/

I-Fax: SMTP, POP3, I-FAX (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF (Compact, Searchable, PDF/A-1b), XPS (Compact, Searchable), OOXML (.pptx, .docx)

Optional: PDF (Trace and Smooth), PDF (Encrypted), PDF/XPS (Digital Signature)

FAX SPECIFICATIONS

Maximum Number of Connection Lines: 2

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method: MH, MR, MMR, JBIG

Sending/Recording Size: Statement to 11" x 17"

STORE SPECIFICATIONS

Standard: USB Memory, Mail Box Simple

Advanced Box

Store to Remote Advanced Box: Supported ***

Print/View from Remote Advanced Box: Supported ***

SECURITY SPECIFICATIONS

Standard

User Authentication (including Department ID Management and Single Sign On-H), Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, IPV6, Restricting New Addresses on Address Book, SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Port Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Initialize (Up to 9x), HDD Erase (Up to 3x), HDD Lock, IPsec, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional

HDD Encryption, HDD Erase Scheduler, Encrypted Secure Print, Encrypted PDF, Secure Watermark, IEEE 2600.1 Common Criteria Certification[♦], Secure Audit Manager Express, uniFLOW, AA-Print, Universal Login Manager

* Envelopes are supported in Cassette 2 only.

** If "Quick Startup Settings for Main Power" is set to ON, it takes seven seconds until the key operation on the touch-panel display is available after turning on the main power, and 10 seconds until the start button function is available.

*** Includes consumables.

▲ Print Speed will slow down with 1200 x 1200 dpi.

▲▲ For Print Driver OS support, see detailed spec sheet.

† XPS cannot be printed directly from Web Access Software.

†† EPS can be printed directly only from Remote User Interface.

*** Requires connection to a networked imageRUNNER ADVANCE device with Advanced Box.

♦ Available approximately six months after launch.

NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.

For more information, call or visit
1.800.815.4000 CSA.CANON.COM

CANON SOLUTIONS AMERICA

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has qualified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. Products shown with optional accessories. Additional information on software requirements and compatibility is available at usa.canon.com. All printer output images are simulated. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitations, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2015 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

CSA/5-15-151
0515-CSAC33005RS-PDF-IH



V² COLOR

