

ALX50™ SPECIFICATIONS

POWER REQUIREMENT	Requires 2-115V 15A circuits with GFI protection
MIXER POWER	115V 1Ø, 1/2 hp 8 FLA, mixer motor
PUMP POWER	115V 1Ø, 3/4 hp 11.8 FLA, Neptune pump motor
MIXING TANK CAPACITY	55 gallons
MAXIMUM OPERATING PRESSURE	600 psi 55 gallons
WEIGHT	350 lbs
PUMP SIZE	27 in wide x 30 in long x 65 in tall
PUMP OUTPUT	34 gallons per hour
PULSE DAMPENER	Nitrogen-filled 200 psi set

Specifications subject to change without notice.

Copyright 2018 Hy-Flex Corporation. All information contained within this document is based on the latest information available at the time of publication. Hy-Flex reserves the right to make changes at any time without notice.



APPLICATIONS

Fireproofing



For parts, accessories or additional information, visit HyFlexcorp.com.



If you don't believe the hype about the ALX-50, try it out for yourself!
Call 866-849-6246 for pricing, recommendations and availability.



Speeding Up The Industry
One Pump At A Time

8774 S. St. Rd. 109 | Knightstown, IN 46148 | 866-849-6246 Toll-Free | 765-571-5167 Fax | HyFlexcorp.com

ALX-50™

Rugged. Efficient.



Portable & Powerful. Period.



STANDARD FEATURES

- Neptune 500VS model metering pump
- 600 psi max operating pressure
- Nitrogen filled pulse dampener
- Suction strainer
- Recirculating line
- ½ hp mixer motor
- Graduated barrel for measuring water
- Stainless lid and grate
- Finely-adjustable volume output
- Stainless steel mixing blade and shaft

ENHANCED FEATURES

- On/Off switch guards
- Heavy-duty stainless steel welded motor mount
- Heavy-duty tubular steel frame
- Two coat zinc rich primer/polyester powder coat meets automotive salt spray tests
- Stainless steel cart top
- Stainless steel tub straps to increase tub stability
- Extra-large 8 inch polyurethane over metal hub casters
- Forklift pockets prevent tip over when transporting on site
- Ratchet strap mounts for mixer lid
- Optional tank drain port (not shown)
- Optional hose hanger (not shown)
- Optional double tank/mixer configuration (model ALX-100) (not shown)
- Optional double pump configuration (model ALX-100T) (not shown)


ACCESSORIES



Universal density kit



50 ft 12 ga heavy duty cord with GFCI

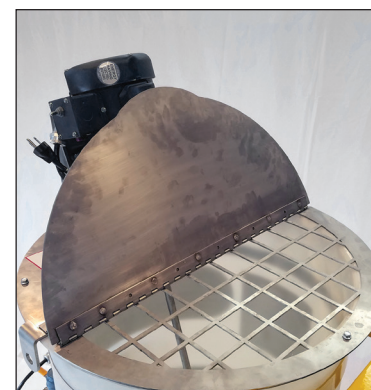


Hinged stainless steel tank top



Injection module



Inline shutoff valve

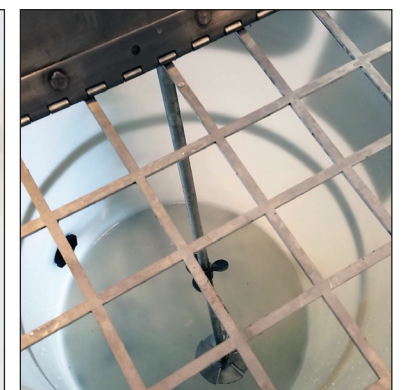

Tank guard and mix blade