



B2000561-1 LID AND B2000563-2 BASE

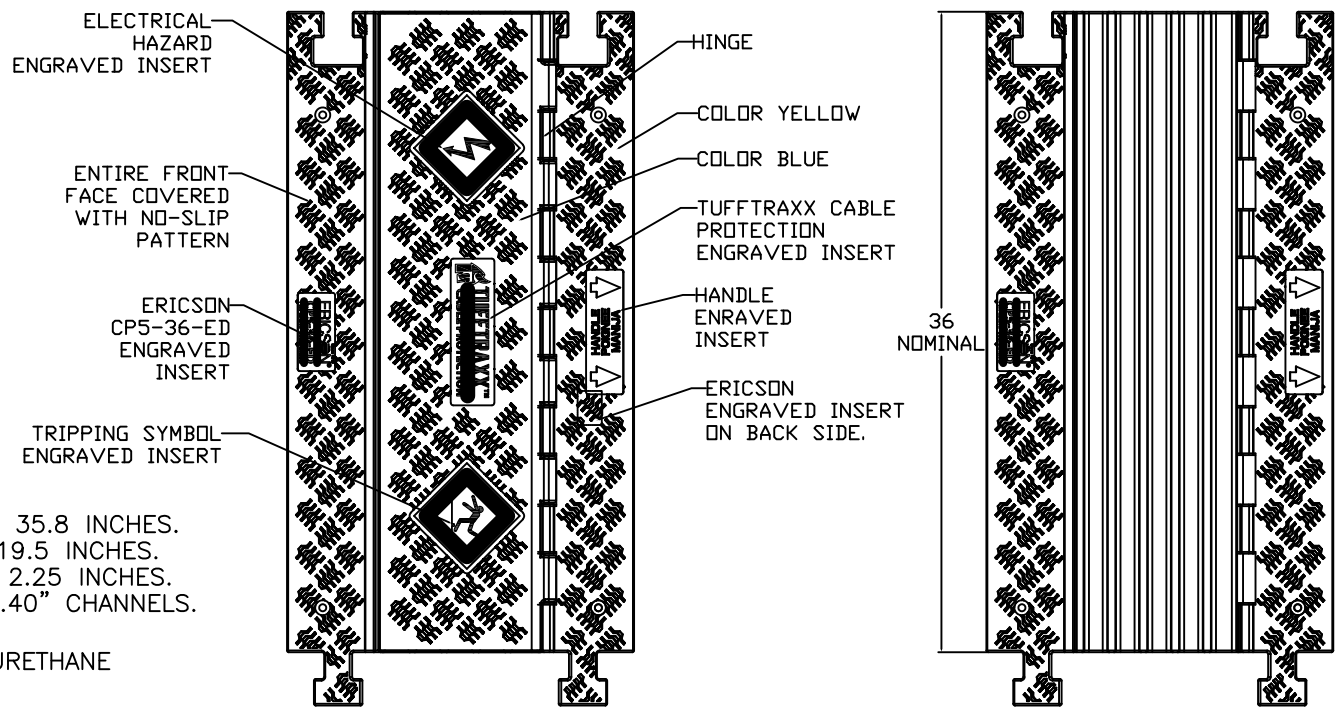

- NOTES:**
- 1) EFFECTIVE LENGTH OF SECTION: 35.8 INCHES.
  - 2) EFFECTIVE WIDTH OF SECTION: 19.5 INCHES.
  - 3) EFFECTIVE HEIGHT OF SECTION: 2.25 INCHES.
  - 4) CABLE CAPACITY: FIVE 1.33"x1.40" CHANNELS.
  - 5) WEIGHT: 23.5 LBS + BOX.
  - 6) MATERIAL: UV STABILIZED POLYURETHANE  
YELLOW BASE AND BLUE LID.
  - 7) TEMPERATURE RANGE: -40F TO +120F.
  - 8) LOAD RATING: 25,000 POUNDS PER TIRE,  
50,000 POUNDS PER AXLE AT 70F.
  - 9) PACKAGING: UNIT SHIPS IN A CARTON  
C8018256.
  - 10) ONE C8020577 INSTRUCTION SHEET  
INSIDE THE CARTON.

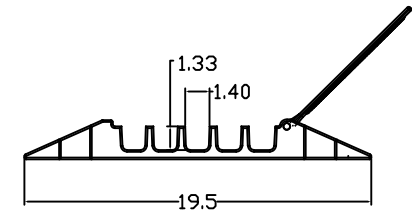

REV	REVISION DESCRIPTION	DATE	BY	CHKD	ECH NO.
A	INITIAL DESIGN				
B	AS PRODUCED	10/9/13	JJB		3597

**TOLERANCES**  
 FRAC. ± 1/64  
 .X ± .015  
 .XX ± .010  
 .XXX ± .005  
 ANGLES ± 1°  
 UNLESS OTHERWISE SPECIFIED  
 DO NOT SCALE  
 B SIZE

DWG. APPROVALS	DATE	REV.

DRAWN JJB 8/18/13  
 CHK'D \_\_\_\_\_

**ERICSON**  
 SAFETY IS OUR STANDARD

ERICSON MANUFACTURING COMPANY  
 1-800-ERICSON • www.ericson.com

DWG. TITLE CP5 ED SERIES PROTECTOR CP5-36-ED, 5 CHANNEL WITH ERICSON LOGO IN 2 PLACES		
SCALE NTS	PROJ NO. --/--	SHEET 1 OF 1
DWG. UNIT NO. CP5-36-ED		REV B