



### Exterior Elevation



section side view

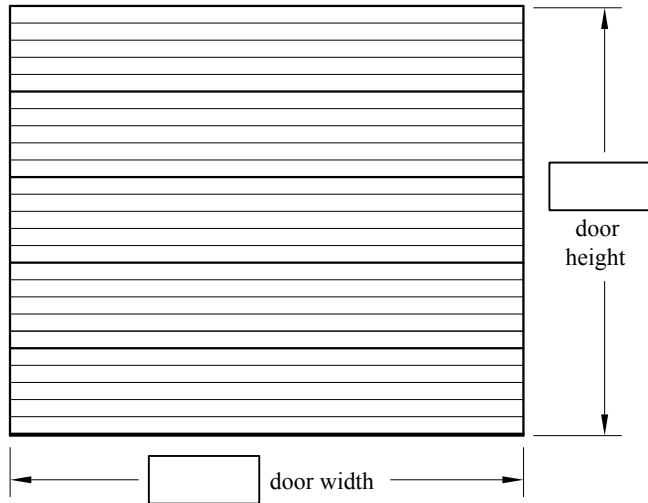

Panel Material: 26 gauge exterior/27 gauge interior

Color: Exterior: Polyester top coat over primer  
 White  Brown  Sandstone  Almond  
 RAL Powder-coat  
 Interior: White polyester primer coat.

Section Thickness: 2"

Panel Profile: Wood grain embossed exterior with four micro-grooves; wood grain flush interior.

Joint Design: Tongue and groove rails with full thermal break.

End Cap: 20 gauge white painted galvanized steel, full height of section.

Insulation: 95% closed cell urethane, CFC free polyurethane core  
 Average R-Value of 17.54; U-value of 0.057

Glazing (Optional)  
 24" x 6" x 1" Insulated Glass (Clear, Tempered or Tinted)  
 24" x 12" x 1" Insulated Glass (Clear, Tempered or Tinted)  
 34" x 16" x 1" Insulated Glass (Clear, Tempered or Tinted)  
 (3/4"x16" N/A in End Panels on 10', 14', 18', 22' wide doors)


Optional Aluminum Full View Frame to match size and panel layout of steel section. (white, clear or powder-coat)  
 (Optional open for field glazing, 1/8" DSB, 1/8" polycarbonate, 1/8" tempered glass, 1/4" tempered glass, 1/2" insulated glass or 1/2" tempered insulated)

### Interior Elevation

height	sections
6'-3" to 8'-0"	4
8'-3" to 10'-0"	5
10'-3" to 12'-0"	6
12'-3" to 14'-0"	7
14'-3" to 16'-0"	8
16'-3" to 18'-0"	9
18'-3" to 20'-0"	10

width	panels
8'-0" to 9'-5"	2
9'-6" to 12'-11"	3
13'-0" to 16'-5"	4
16'-6" to 18'-2"	5
16'-6" to 20'-2"	5
20'-3" to 24'-2"	6
24'-3" to 26'-2"	8
26'-3" to 30'-2"	10
30'-3" to 32'-2"	12

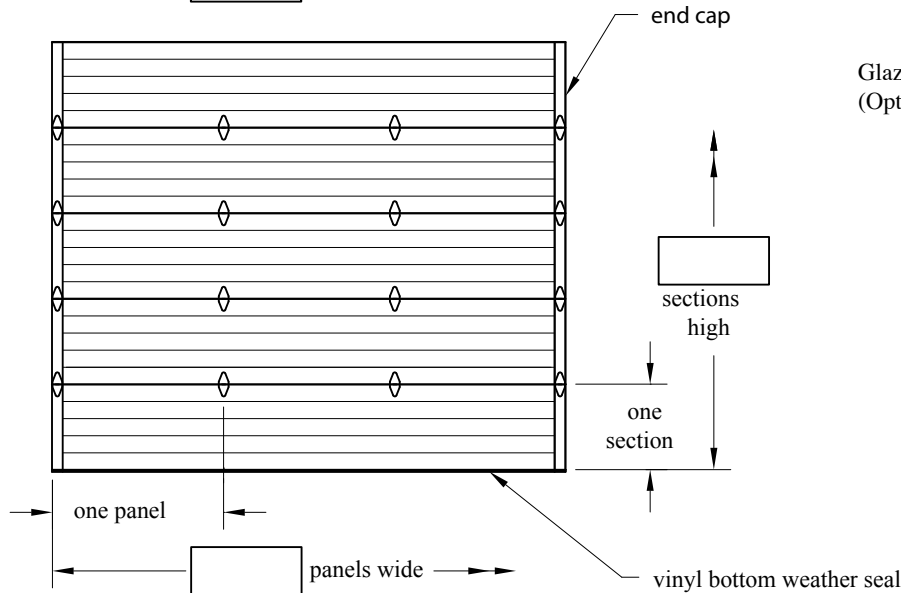

04/2016 Copyright 2016 C.H.I. Overhead Doors

Door Qty	Door Width	Door Height	Jamb Type	Model	Exterior Color

Miscellaneous Notes

**C.H.I.**  
OVERHEAD DOORS  
1485 Sunrise Drive, Arthur, IL 61911  
TOLL FREE: 800-677-2650 FAX: 217-543-3087

C.H.I. Model 3216: Micro-Grooved Polyurethane Sandwich Door

ARCHITECT:	
CONTRACTOR:	
PROJECT NAME:	
DOOR COMPANY:	
QUOTE NUMBER:	
PREPARED BY:	
DOOR NUMBER:	
DATE:	