


5500 OVERLAY CARRIAGE HOUSE FIBERGLASS

PERSONALIZING OPTIONS


GOOD / **BETTER** / BEST

CARRIAGE HOUSE DESIGNS

Square Tops

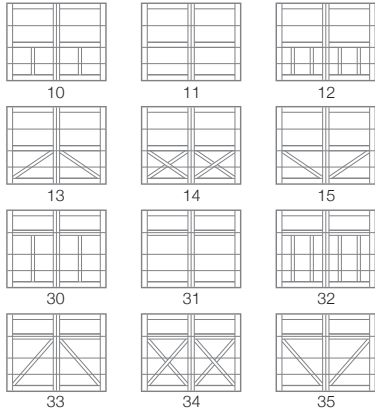

Arched Tops

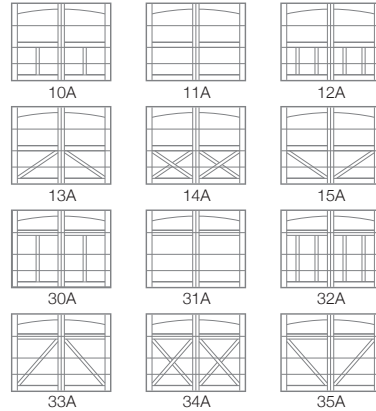


COLORS¹




WINDOW DESIGNS


Double Row

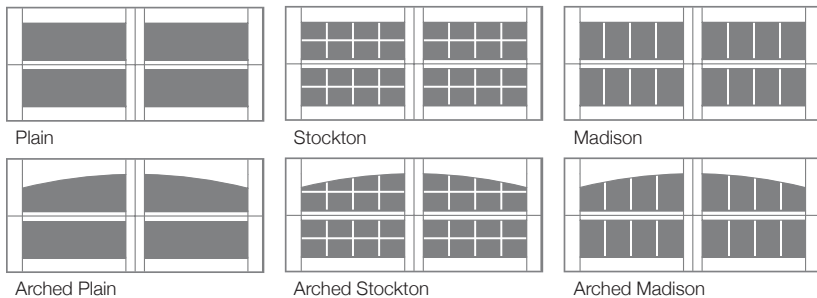


Single Row

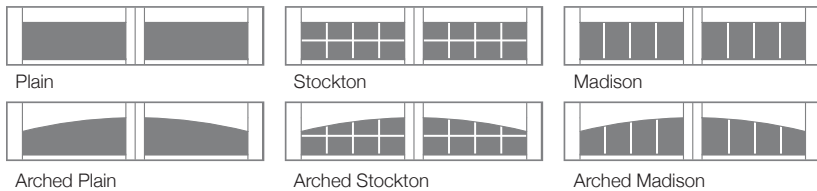

GLASS ^{Plain available as non-insulated Polycarbonate}

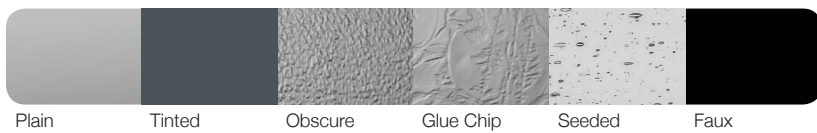

EXTERIOR HARDWARE

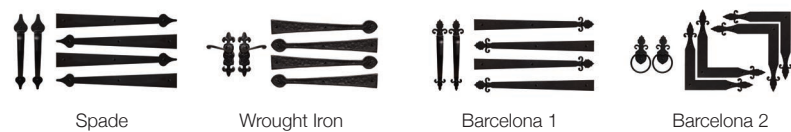

Specifications

Panel Style	Overlay
Overlay Material	XPS [Extruded Polystyrene] Composite and Fiberglass Beadboard
Section Construction	2-1/2" Thick - 2-Sided Steel
Section Material	Medium Duty / 27 ² Ga. Steel
Insulation Type	1-13/16" Polystyrene
R-value / Thermal Performance	R-10.67
Window Style³	Square or Arched
Glass	Insulated and Non-Insulated
FBC Wind Load⁴	Non-Impact and Impact Rated
TDI Wind Load⁴	Impact Rated Only
Warranty	Limited Lifetime on Sections 3 Years on Overlays 3 Years on Springs 6 Years on Hardware



¹ Refer to your local C.H.I. Dealer for exact color match. ² Lower steel gauge [ga.] number indicates stronger steel. ³ Model number indicates design and window style. ⁴ Ask your local C.H.I. Dealer about our full line of wind load rated doors.

Your Local Garage Door Professional