


# Drop Ancillary

## CF81GHZC - Outdoor F81 Splice Adapter



Don't let cheap splices be expensive for your network. PPC's line of female splice adapters offer superior electrical, environmental, and mechanical performance beyond industry standards. Our unique center conductor contacts provide the most reliable and repeatable installations, ensuring superior network performance.

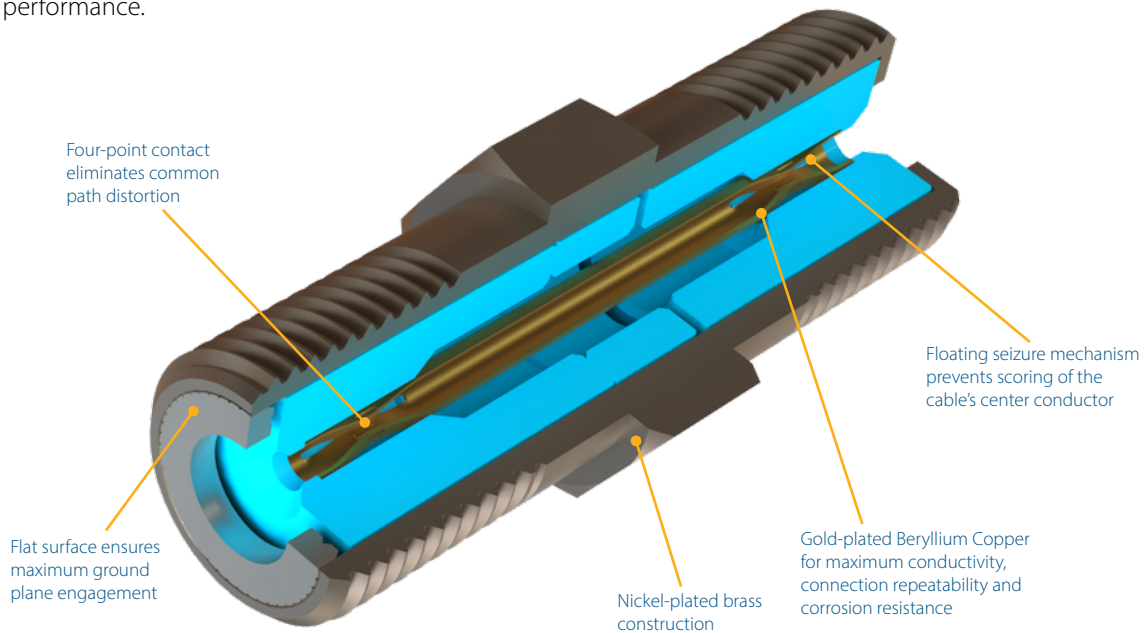

### Specifications

Return Loss	-30 dB to 3 GHz minimum
Shielding Effectiveness	-120 dB minimum
Operating Temperature	-40°F to 140°F (-40°C to 60°C)
Corrosion Resistance	meets SCTE and Belcore per ATSM B117 (1000 hour salt fog)
Moisture Migration	Meets SCTE IPS-TP-013 when paired with PPC approved products (Red-dye moisture migration test)

*Meets or Exceeds all SCTE Specifications*

### Related Products



**CF81GHZM**  
Indoor F81 Adapter



**CF81GHZMHDW**  
Indoor F81 Adapter & Hardware



**EX6XLPLUS**  
RG6 Continuity® Connector



**EX6XLWSPLUS**  
RG6 AquaTight®/Continuity® Connector



**WS500**  
1/2" Weather Seal

*This product may be protected by one or more patents. For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)*