

Diamond® Ground Clamps

Type G Ground Rod Clamps



The Diamond® Difference™


Does Your Hardware Pass the Test of Time?

- superior resistance to corrosion.
- most effective method for small parts
- Eliminates the problem of Hydrogen Embrittlement.

Diamond® Products Stand the Test of Time.

Type G Ground Rod Clamps

- A dependable ground connection offered at a substantial savings.
- Cast of high strength corrosion-resistant copper alloy CDA955.
- Hex head bolts.
- Simplified compact design will make a lasting, trouble-free connection.
- UL and CSA listed

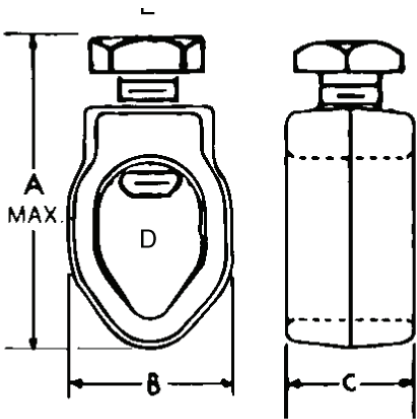

Part Numbers	Nominal Rod Diameter		Wire Range				Dimensions (IN)						Package Quantity
	IN	MM	Max	Min	Max (MM2)	Min (MM2)	A (Max) Bolt	Screw Thread Size	B	C	D	E	
G3-DS	3/8	9.5	4 Str.	10 Sol.	21.6	5.2	--	5/16"-18UNC	11/16"	1/2"	27/64"	3/8"	100
G4-DS	1/2	12.7	2 Str.	10 Sol.	33.6	5.2	--	3/8"-16UNC	49/64"	21/32"	33/64"	1/2"	100
G5-DS	5/8	15.8	2 Str.	10 Sol.	33.6	5.2	--	3/8"-16UNC	29/32"	19/32"	21/32"	1/2"	50

Rev 1