


# Drop Ancillary

## TR75S - 75Ω Basic Terminator



Poor electrical terminations caused by cheap terminators can wreak havoc on system performance. Common faulty 75 Ohm terminations caused by poor performance result in service calls. PPC provides industry leading return loss and shielding performance, improving network uptime and reducing service calls.

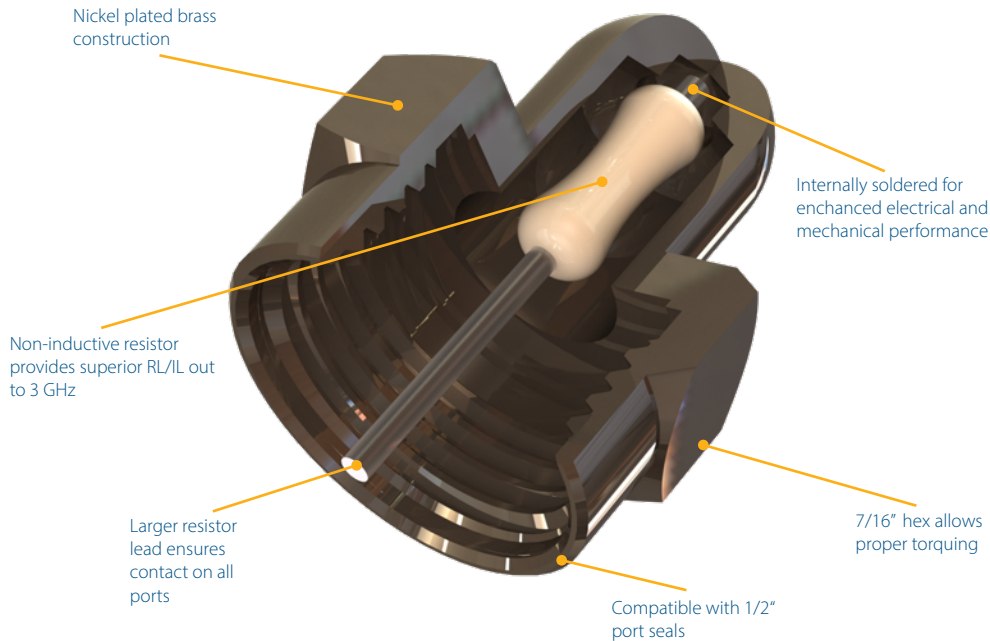

### Specifications

Return Loss	-30 dB to 3 GHz minimum
Shielding Effectiveness	-120 dB minimum
Corrosion Resistance	meets SCTE and Belcore per ATSM B117 (1000 hour salt fog)
Moisture Migration	Meets SCTE IPS-TP-013 when used with WS500 weather seal (Red-dye moisture migration test)

*Meets or Exceeds all SCTE Specifications*

### Related Products



**TR75SWS**  
Deluxe Terminator



**PST75**  
Locking Terminator



**PST75I**  
Locking/Isolation Terminator

*This product may be protected by one or more patents. For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)*