


Drop Ancillary

RAWSPLUS - AquaTight® Right Angle F81Adapter



When working in a crowded pedestal, space is at a premium. Cable is often damaged by forcing the pedestal shut, changing the impedance of the drop. PPC's RAWSPLUS adapter prevents damage to cable, connectors, and ports by offering an AquaTight® & SignalTight® solution that protects signal integrity, and seals out moisture. The 90° adapter provides a tech friendly way to make installation in a tight space easier, while maintaining class leading electrical, environmental, and mechanical performance.

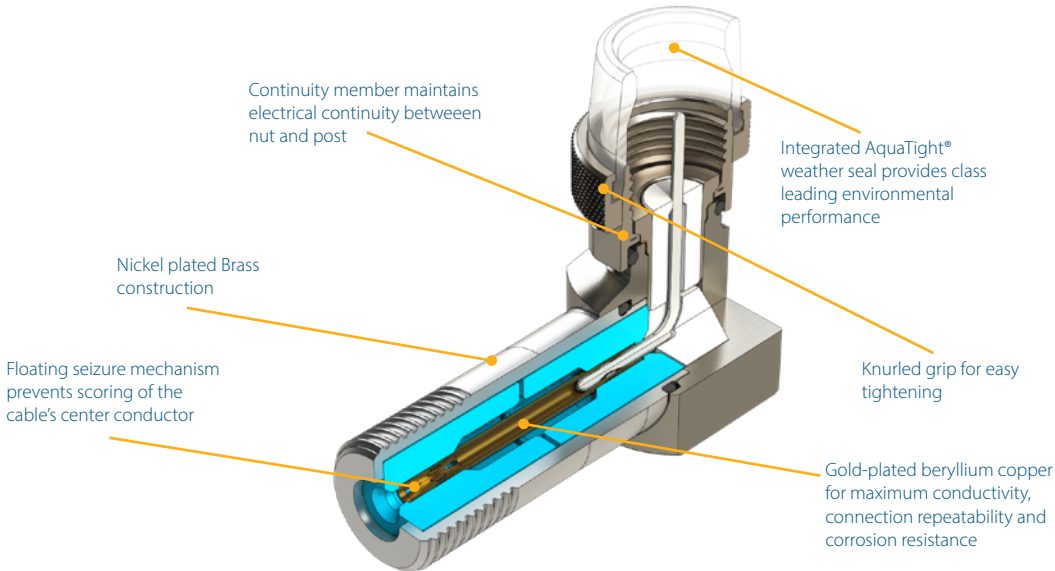

Specifications

| | |
|-------------------------|---|
| Return Loss | -30 dB to 3 GHz minimum |
| Shielding Effectiveness | -120 dB minimum |
| Operating Temperature | -40°F to 140°F (-40°C to 60°C) |
| Corrosion Resistance | meets SCTE and Belcore per ATSM B117 (1000 hour salt fog) |
| Moisture Migration | Meets SCTE IPS-TP-013 (Red-dye moisture migration test) |

Meets or Exceeds all SCTE Specifications

Related Products



RAPLUS
Right Angle Adapter



EX6XLPLUS
RG6 Continuity® Connector



EX6XLWSPLUS
RG6 AquaTight®/Continuity® Connector



TR75SWS
Deluxe Terminator

This product may be protected by one or more patents. For further information, please visit: www.ppc-online.com/patents