

# Miniflex® Wall Clips




## Features & Benefits

- Flame retardant, UV and water resistant polymer (indoor/outdoor)
- High tensile retention
- Cable can be removed and reinstated without clip damage
- Can be fixed to a variety of surfaces
- Distribution/frequency of clips can be greatly reduced
- Supplied with wall fixings and adhesive pad

## Compatibility List

- 2 mm and 3 mm Miniflex® Fiber Cable
- PPC QuikPass™ Distribution Cable
- 8mm and 10mm Miniflex Microduct
- QuikPush® Cable Assemblies

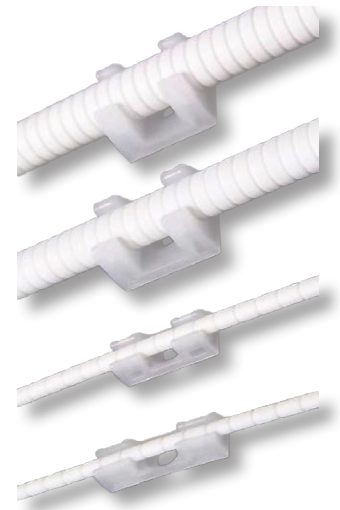

## Overview

Suitable for indoor and outdoor use, Miniflex Wall Clips are low-profile, easy-to-use fixing accessories designed specifically for a range of Miniflex cables, protection tubes and microducts. Miniflex Wall Clips provide high tensile retention by virtue of the gripping features within the clip which holds onto the patented Miniflex grooves. This ensures high pull-out resistance and improves the appearance of the installation by preventing the sag associated with traditional cable clips.

The Miniflex clips offer several advantages over traditional cable and conduit clips when securing Miniflex to wall surfaces, including the ability to remove and reinstate the cable without damaging the clip. Supplied in packs of 200 pieces, the clips include the necessary screws and wall fixings as well as self-adhesive pads for application on surfaces that are not suitable for screw mounting.

## Applications

- Indoor & Outdoor FTTx Installations
- QuikPass Solution

## Technical Data

Part Number	Compatible Miniflex Size	Clip Dimensions (L x H x D)	Tensile Retention
	<i>mm</i>	<i>mm (in)</i>	<i>N</i>
10-1407	2.0	23.0 x 6.4 x 5.1 (0.9 x 0.25 x 0.2)	> 30
10-1408	3.0	19.0 x 7.5 x 5.8 (0.75 x 0.3 x 0.23)	> 40
10-1409	8.0	21.0 x 16.0 x 11.0 (0.83 x 0.63 x 0.43)	> 80
10-1410	10.0	21.0 x 18.0 x 12.9 (0.83 x 0.71 x 0.51)	> 80

This product may be protected by one or more patents • For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)

[customerservice@ppc-online.com](mailto:customerservice@ppc-online.com) • 1-800-800-6652 • [www.ppc-online.com](http://www.ppc-online.com)

# Miniflex<sup>®</sup> Wall Clips



## Technical Data

Operating Temperature Range	Flame Retardancy	Color
10°C to 50°C (14°F to 122°F)	UL 94: V0	White

## Ordering Information

Part Number	Description	Compatible Miniflex Size	Pack Dimensions L x H x D	Pack Quantity
	<i>mm</i>	<i>mm</i>	<i>mm (in)</i>	<i>Pcs</i>
10-1407	2 mm Miniflex Wall Clip	2.2	185 x 97 x 125 (7.3 x 3.8 x 4.9)	200
10-1408	3 mm Miniflex Wall Clip	3.0		
10-1409	8 mm Miniflex Wall Clip	8.0		
10-1410	10 mm Miniflex Wall Clip	10.0		