


Hardline 2pc Connectors



PP500MC2

Pin Connector for Cable

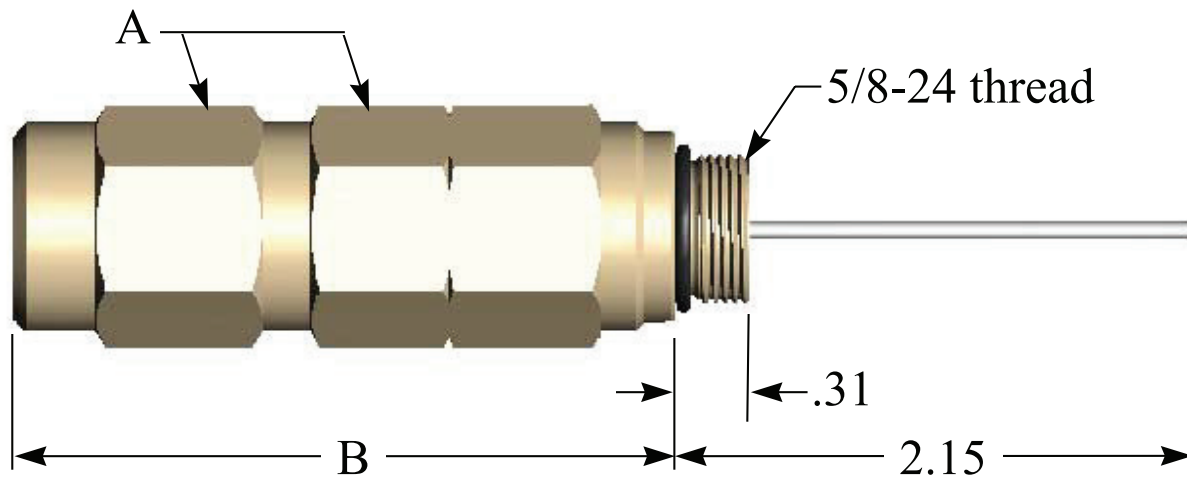

Connector Dimensions:

A: Hex Dimension .875"

B: Overall Length (installed) 3.19"

Cable Dimensions:

Nominal Center Conductor .123"

Nominal Cable Outside .510"

Product Specifications

Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms
Return Loss	Better than -30 dB to 1 GHz
Insertion Loss	Less than .10 dB to 1 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Cable Retention Force	500 pounds
Operating Temperature	-40° F to + 140° F (-34° C to 60° C)

Meets or Exceeds all SCTE Specifications

Part Numbers

PP500MC2	Hardline 2pc Pin Connector for MC2 cable.
----------	---

Preparation & Installation Tools

- Two(2) 7/8" wrenches
- Cutters for pin of connector
- Appropriate Cable preparation tool