


# Hardline 3pc Connectors

## TPP 500 P3

### Pin Connector for 500 P3 cable

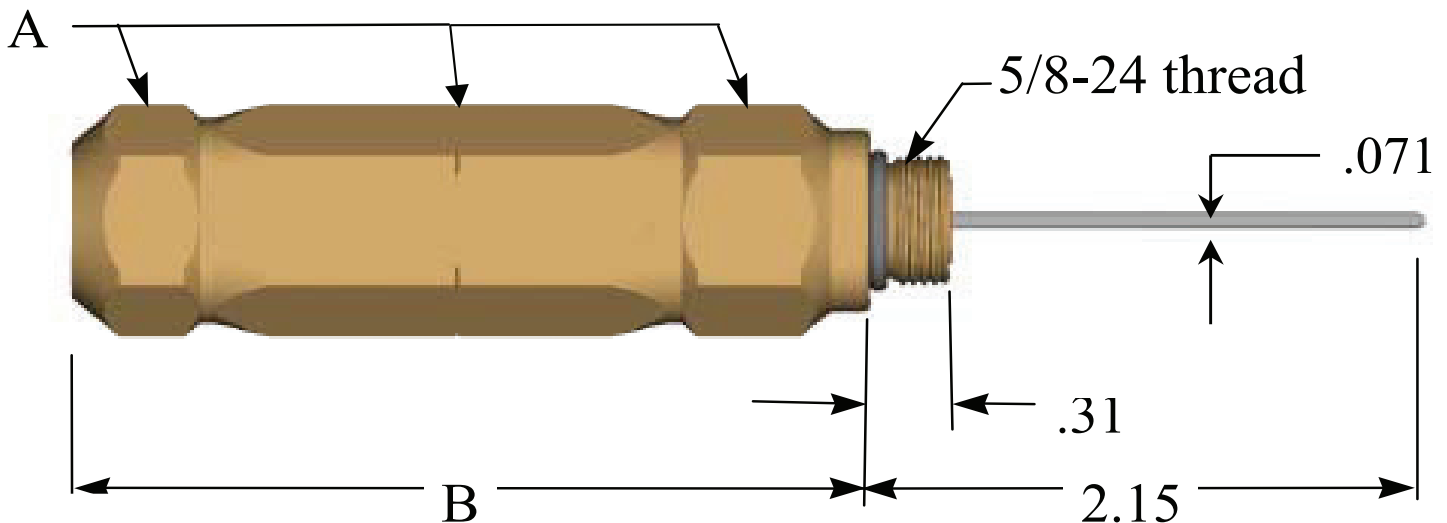

#### Dimensions:

A: Hex Dimension	1.00 inches
B: Overall Length (installed)	3.11 inches

#### Product Specifications

Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms
Return Loss	Better than -30 dB to 1 GHz
Insertion Loss	Less than .10 dB to 1 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-34° C to 60° C)

*Meets or Exceeds all SCTE Specifications*

#### Part Numbers

TPP500P3	Hardline 3pc Pin Cable to Pin Connector for 500 P3 cable
----------	--

#### Preparation & Installation Tools

Two(2) 1" wrenches
Cutters for pin of connector
Appropriate Cable preparation tool