


ATP Series Ultra-Precision Attenuator

In today's marketplace, PVRs, Digital set-tops, VoIP, HSD, and a TV in every room is placing a strain on CATV signal levels. The ATP Series is designed to provide accurate signal levels to each device connected to the drop.

Features & Benefits


- Small physical size minimizes risk of port damage
- 7/16" hex body allows for standard tool installation
- 100% Surface Mount Technology for consistent performance
- Moisture sealed one-piece construction
- Direct mechanical ground
- Easy to read numbered labeling comes standard with optional color coding available
- Extremely Tight tolerance (.25 dB)
- Good return loss (greater than 18 dB)
- Precision four-point female seizure contact

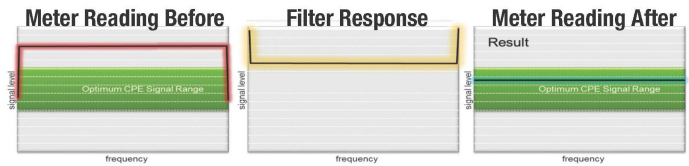

Specifications	
Frequency	1,002 MHz minimum
Impedance	75 Ohms
Shielding Effectiveness	> 120 dB
Dimensions	Length = 1.65 in (4.19 cm) Diameter = 0.5 in (1.27 cm)
Surge	6 kV per SCTE IPS-TP-210

Sample Part #:

ATP3-1000

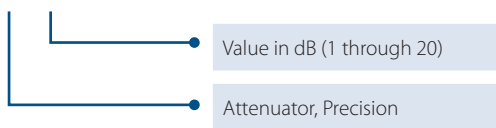

Trap Specifications (Model Specific)

Model: **ATP3-1000** Prep. By B.O. Date: 08/04/03
 Response: Sample Minimum operating frequency: 1 Ghz

Marker #	Freq. Desc.	Freq. Mhz	Typ. Loss(dB)	Limits(dB)
1		5	3.1	3.0±0.3
2		550	3.1	3.0±0.25
3		750	3.0	3.0±0.25
4		860	3.0	3.0±0.25
5		1000	2.9	3.0±0.25