

# Patch Only Terminals



The PPC family of enclosures offers a flexible and cost effective solution for fiber network deployments. Craft-friendly, expandable “grow as you go” designs support both greenfield and brownfield projects, and can be used either indoors or outdoors.

The SFIT (Stackable Fiber Interface Terminal) is the small-to-midsized solution; the UCS (Universal Closure System) handles the larger requirements. Both lines offer a variety of network functions.

## Description


PPC SFIT Patch Only Terminals are designed for use with connectorized cables in a plug-and-play network, for easier and more cost-effective deployments.

The bulkhead ships equipped with 12 adapters (either SC/APC or SC/UPC) and can be expanded to a total of 24. The terminal can be installed indoors in an IDF closet or on the outside wall of smaller MDUs as a demarcation point.

The terminal can be stacked with other SFIT terminals, such as a slack storage enclosure, to provide additional functionality.

## Features

- Bulkhead ships with 12 SC/APC or SC/UPC adapters
- Can be expanded to a total of 24 adapters
- Internal craft separation door
- Fiber guide spools on both feed and distribution side
- Strength member tie-down and ground lug
- Door has push-to-latch, locking hasp & 216-tool security bolt
- Cable ports equipped with flat rubber grommets
- Molded-in feet for easy wall mounting
- Small footprint for use in tight spaces
- Stackable design allows slack storage enclosure to be coupled
- Pole mountable with Pole Mount Bracket kit (SFIT-POLEMTG-10)
- Designed for indoor and outdoor use
- A variety of cable port nozzles are available

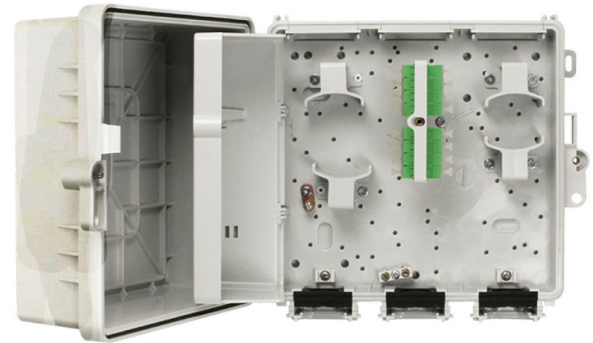


SFIT-FL12AXNN (SC/APC)  
SFIT-FL12UXNN (SC/UPC)

## Specifications

**Dimensions:** 9" H x 10" W x 4.7" D

**Materials:** Flame retardant PBT/PC blend thermoplastic, UL 94V-0 (indoor)/UL 94-5VA (outdoor) rated

**Safety:** UL1863

**Performance:** Designed to meet GR-049-CORE, GR-3125-(c)  us & GR-2898-CORE

**Finish:** Light Gray

Part No.	Description
SFIT-FL12AXNN	SFIT Patch Only Terminal - 12 SC/APC adapters (max of 24). Three cable entry ports with flat rubber grommets
SFIT-FL12UXNN	SFIT Patch Only Terminal - 12 SC/UPC adapters (max of 24). Three cable entry ports with flat rubber grommets.

# Patch Only Terminals



## Description

PPC UCS Patch Only Terminals are designed for use with connectorized cables in a plug-and-play network, for easier and more cost-effective deployments.

The bulkhead ships equipped with 24 adapters (either SC/APC or SC/UPC) and can be expanded to a total of 72. The terminal can be installed indoors in an IDF closet, or on the outside wall of MDUs or MTUs as a demarcation point.

The terminal can be stacked with other UCS terminals, such as a slack storage enclosure, to provide additional functionality.

## Features

- Bulkhead ships with 24 SC/APC or SC/UPC adapters
- Can be expanded to a total of 72 adapters
- Fiber guide spools on both feed and distribution side
- Strength member tie-down and ground lug
- Mounting bracket holds up to two splice trays (optional)
- Door has push-to-latch, locking hasp and 216-tool security bolt (3)
- Four cable access ports with removable caps
- Ships with one rubber cone grommet/brush disk (UCS-G2)
- Includes four screw-on feet for easy wall mounting
- Can be pole-mounted with Pole Mount Bracket kit (UCS-PMB)
- Stackable design allows coupling with other UCS enclosures, such as Slack Storage, using SCC-UUF coupler kit (one per port)
- Designed for indoor and outdoor use



UCS-FS72AXNN-JB (SC/APC)  
UCS-FS72UXNN (SC/UPC)

## Specifications

**Dimensions:** 13" H x 13" W x 8" D

**Materials:** Flame retardant PBT/PC blend thermoplastic, UL 94V-0 (indoor)/UL 94-5VA (outdoor) rated

**Safety:** UL1863  us

**Performance:** Designed to meet GR-049-CORE, GR-3125-CORE & GR-2898-CORE  
Adapters and connectors exceed the requirements of GR-326-CORE

**Finish:** Light Gray

Part No.	Description
UCS-FS72AXNN-JB	UCS Patch Only Terminal - 24 SC/APC adapters (max of 72). Four cable entry ports, one port with rubber cone grommet
UCS-FS72UXNN	UCS Patch Only Terminal - 24 SC/UPC adapters (max of 72). Four cable entry ports, one port with rubber cone grommet.