



220V - 115V

SASL161 :

115V AC single-phase + earth, 50/60Hz , I_{max}=20A,
Max. current 120 A, Power factor: 120A-60%,100A
-100%

SASL 160 :

230V AC single-phase + earth, 50/60Hz , I_{max}=26A,
Max. current 165 A, Power factor: 100 A, 100%

- Ideal for on-site work
- welding data acquisition system

•Supplied with a memory card with 200 programs,
20 levels each

Weight:


- SASL-16xTRA: 15 kg / 33 lbs
- SASL-16xTF : 25 kg / 55 lbs



SD Flash card with 200 programs per card



5.7" multi-language, colour touch screen

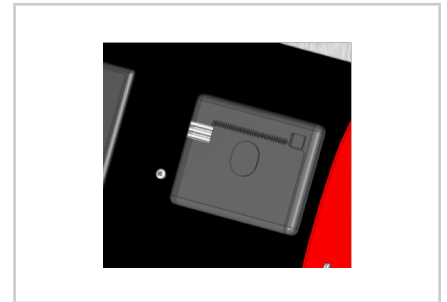

Integrated printer

References	Accessories	Consumables
220V : : SASL-160TRA SASL-160T SASL-160TF 115V : SASL-161TRA SASL-161T SASL-161TF	SACF-020: Memory card SALCF-020: memory card reader	SACW-C006: Coolant SIMP-02: printer spool for SASL

