




Ø10 - Ø80 mm

Ø0,4" - Ø3"


- **Rotating joint** for gas, current and cooling
- **Water-cooled** tilt head
- Carriage for head and wire adjustment
- Integrated rotating wire feeder (Ø 0.8 mm)
- Wire feed speed from 0 to 1.5 m/min
- Power factor: **200 A, 100%**

Weight:

- 7.5 kg / 17 lbs without wire spool
- 8.5 kg / 19 lbs with wire spool

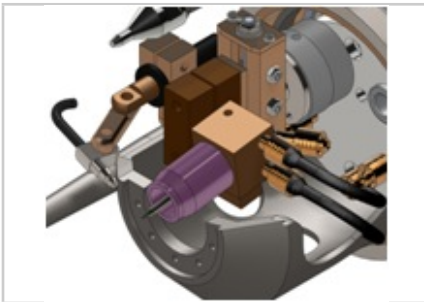

Water-cooled tilt head with adjustable wire

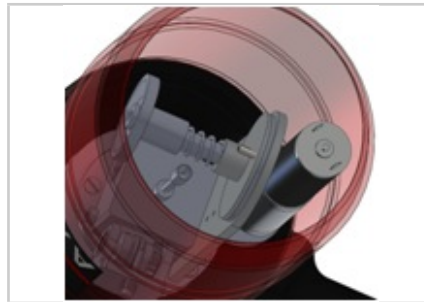

Wire supply rotates along with head



Driven by AXXAIR power source (cf compatibility table)

References	Options	Consummables
SATP-80	<p>Additional gas chamber</p> <p>Pneumatic clamping</p>	<p>SCE16-xx : Ø 1,6 mm (max 40 mm)</p> <p>SCE24-xx : Ø 2,4 mm (max 40 mm)</p>

