

STEAM GENERATOR CONTROL KIT

SPECIFICATION SHEET

MODEL: K60 3-BUTTON DIGITAL CONTROL FOR USE WITH AK STEAM GENERATOR

Features

- 3-button digital control with on/off, temperature and time duration setting.
- Display alternates between ambient room temperature and time remaining.
- Features separate, remote mounted temperature sensor.

Installation

- Control mounts either inside or outside steam room.
- Control housing to be mounted in 2 3/8" diameter hole in wall.
- Temperature sensor mounts in 7/8" diameter hole located 6" down from 84" ceiling.
- Control and sensor cables connect to PCA inside steam generator.

Item Number

Digital Steam control Kit with control, sensor, cables and ComfortFlo steam head.

9101-101 K60-CP Chrome

9101-102 K60-PB Polished Brass

9101-105 K60-PN Polished Nickel

9101-106 K60-BN Brushed Nickel

9101-107 K60-ORB Oil Rubbed Bronze

May be used with additional K60 as a second control.

Not intended for use as installation instructions. Refer to specific generator model installation instructions for further detail.


INSTALLATION VIEW



K60 Digital Control



ComfortFlo Steam Head

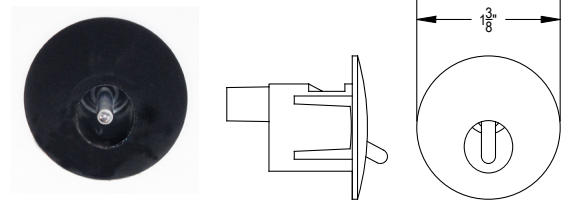

AMEREC STEAM

P.O. Box 2258 | 17683 128th Place NE, #C | Woodinville, WA 98072, USA

Toll-Free 1-800-331-0349

amerec@amerec.com | www.amerec.com

Amerrec reserves the right to change specifications and design without notice.

© 2017 Amerrec Steam

amerec[®]

STEAM. SAUNA. SOLUTIONS.