

STEAM GENERATOR CONTROL KIT

SPECIFICATION SHEET

MODEL: K60 3-BUTTON DIGITAL CONTROL
FOR USE WITH AK STEAM GENERATOR

Features

- 3-button digital control with on/off, temperature and time duration setting.
- Display alternates between ambient room temperature and time remaining.
- Features separate, remote mounted temperature sensor.

Installation

- Control mounts either inside or outside steam room.
- Control housing to be mounted in 2 3/8" diameter hole in wall.
- Temperature sensor mounts in 7/8" diameter hole located 6" down from 84" ceiling.
- Control and sensor cables connect to PCA inside steam generator.

Item Number

Digital Steam control Kit with control, sensor, cables and ComfortFlo steam head.

- 9101-101 K60-CP Chrome
- 9101-105 K60-PN Polished Nickel
- 9101-106 K60-BN Brushed Nickel
- 9101-107 K60-ORB Oil Rubbed Bronze
- 9101-108 K60-BB Brushed Bronze
- 9101-109 K60-MB Matte Black

May be used with additional K60 as a second control.

Not intended for use as installation instructions. Refer to specific generator model installation instructions for further detail.


INSTALLATION VIEW



K60 Digital Control 3" H x 3" W x 1/4" D



ComfortFlo Steam Head 2-3/4" H x 3" W x 1-7/16" D

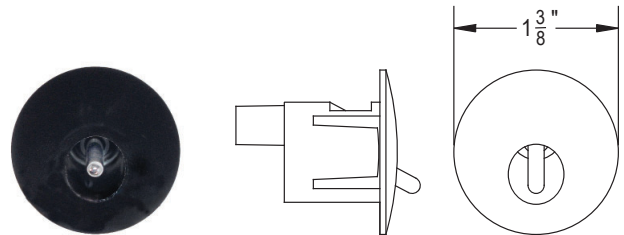

AMEREC STEAM
P.O. Box 2258 | 17683 128th Place NE, #C | Woodinville, WA 98072, USA
Toll-Free 1-800-331-0349
amerec@amerec.com | www.amerec.com

Amerec reserves the right to change specifications and design without notice.
© 2019 Amerec Steam

amerec[®]
STEAM. SAUNA. SOLUTIONS.