



**FEATURES**

- ✓ Wide Frequency Range
- ✓ HC-51/U Package
- ✓ High Stability Over Temp

Crystals

#blileytakesyoufurther


**Part Number Configuration**

BQCTR – M – B

Center Frequency	Mode	Frequency Stability	Operating Temperature	Setting Tolerance	Load Capacitance
500 kHz to 350 MHz	F: Fund 3: 3 <sup>rd</sup> OT 5: 5 <sup>th</sup> OT 7: 7 <sup>th</sup> OT	B: ±50ppm D: ±20ppm F: ±15ppm	B: -20°C to +70°C C: -40°C to +85°C	A: ±5ppm B: ±10ppm D: ±20ppm S: Specify	A: 8pF F: 18pF G: 20pF S: Specify

\*Not all combinations of options may be possible  
\*\*Other options may be available

**Physical Specifications**

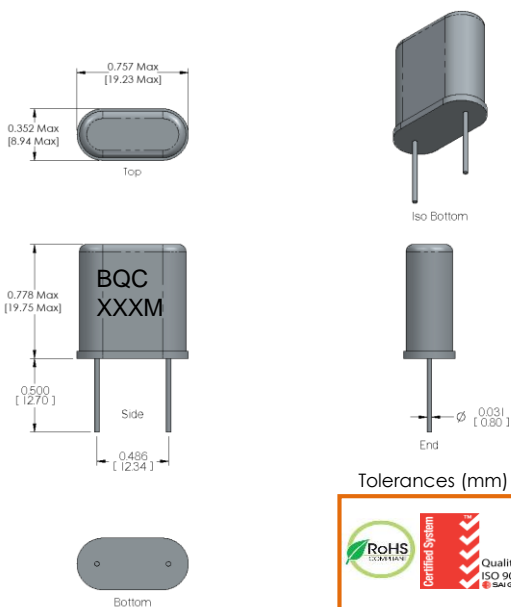

PIN	FUNCTION
1	Crystal
2	Crystal

Tolerances (mm) .X = ± 0.5, .XX = ±0.2 unless otherwise specified



Notes  
1) Weight = 1.5gms typical

**DISCLAIMER:** Bliley Technologies, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

## Performance Specifications

Parameter	Conditions	Min	Max	Unit
Frequency Range		500k	350M	Hz
Frequency Tolerance	@ + 25°C		±50 Max (see options)	ppm
Frequency Stability			±100 Max (see options)	ppm
Aging	Max 1 <sup>st</sup> Year	±1.0	±5.0	ppm
Equivalent Series Resistance (max)	Dependent on Frequency and Mode	25	1000	Ω
Insulative Resistance	Min @ 100Vdc ±15Vdc		500	MΩ
Drive Level	Typical		100	μW
C0 (Shunt Capacitance)	Max (typical)	1.0	5.0	pF
CL (Load Capacitance)	Per Option (typical)	6-20 (see options)		pF
DLD	50nW to 100μW		±10 Max	ppm
RLD	50nW to 100μW		20% Max	Ω
Operating Temp Range		-20 to +70 / -40 to +85		°C
Storage Temp Range		-55 to +125		°C
Sealing Method		Resistance Weld		
Moisture Sensitivity Level	1			
G-Sensitivity			0.2	ppb/g
Vibration	MIL-STD-202, Method 214, Test Condition E			
Shock	MIL-STD-202, Method 213, Test Condition G			