



FEATURES

- ✓ Wide Operating Temperature Range
- ✓ Standard 5x3.2mm Package
- ✓ Rugged Hermetically Sealed Package
- ✓ Mil-Std-202 Compliant

Voltage Controlled Oscillator

#blileytakesyoufurther


Description

Voltage Controlled Oscillators are designed to meet the rigorous demands of Military Standards as well as provide long life to OEM equipment manufacturers. Bliley Engineers Concurrent Design philosophy provides robust designs which are economical as well as reliable for long-term life. Applications consist of SATCOM, TELECOM, Military and Instrumentation.

Block Diagram



Part Number Configuration

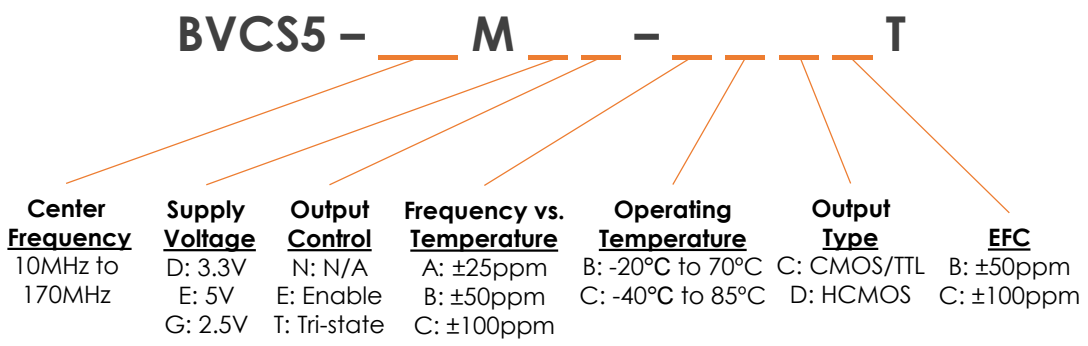

*Not all combinations of options may be possible
 **Other options may be available

Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Frequency Range		10		170	MHz
Frequency Stability					
vs. Temperature	See Options (Max) Referenced to +25°C		±25, ±50, ±100		ppm
vs. Load	5% Change			±1	ppm
vs. Supply Voltage	5% Change			±1	ppm
Perturbation	Per 1°C			±3	ppm
Aging	1 Year			±3	ppm
Supply Voltage	Option D	3.13	3.3	3.47	Vdc
	Option E	4.75	5	5.25	Vdc
	Option G	2.37	2.5	2.63	Vdc
Current Consumption			15	40	mA
Output Control	Enable – High, Open Disable - Low	30% Vdd		70% Vdd	Vdc
Electronic Frequency Control					
Voltage Range	3.3Vdc	0.3	1.65	3.0	Vdc
	5.0Vdc	0.5	2.5	4.5	Vdc
	2.5Vdc	0.2	1.25	2.3	Vdc
Frequency Range	See Options (Min)		±50, ±100		ppm
Slope			positive		
Input Impedance			5		MΩ
Linearity			10		%
Start Up Time				10	mSec

Performance Specifications





Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Output Characteristics					
High Output Level	Logic "1"	90% Vdd			Vdc
Low Output Level	Logic "0"	10% Vdd			Vdc
Rise/Fall Time		5			nSec
Duty Cycle		45	50	55	%
Load		15			pF

Parameter	Conditions	Values			Unit
		TYP			
Phase Noise					
Phase Noise (100MHz @ 25°C)	Offset				
	10Hz	-63			dBc/Hz
	100Hz	-95			dBc/Hz
	1kHz	-120			dBc/Hz
	10kHz	-130			dBc/Hz
	100kHz	-140			dBc/Hz
	1MHz	-148			dBc/Hz
Phase Jitter	12KHz-20MHz RMS	1.0			pSec

Environmental Compliance

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operating Temperature	Option B	-20		+70	°C
	Option C	-40		+85	°C
Storage Temperature		-45		+90	°C
Solderability	MIL-STD-202 Method 208				
Shock	MIL-STD-202 Method 213 Test Condition A				
Vibration	MIL-STD-202 Method 204 Test Condition C				
Seal	MIL-STD-202 Method 112 Test Condition C & D				

Physical Specifications

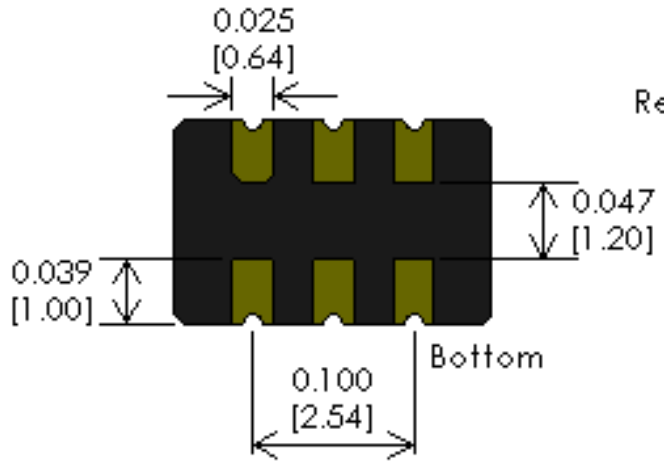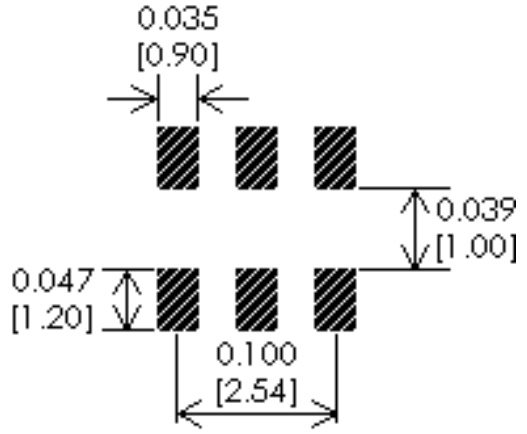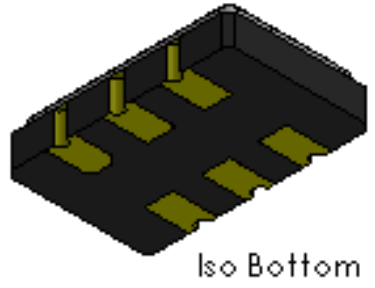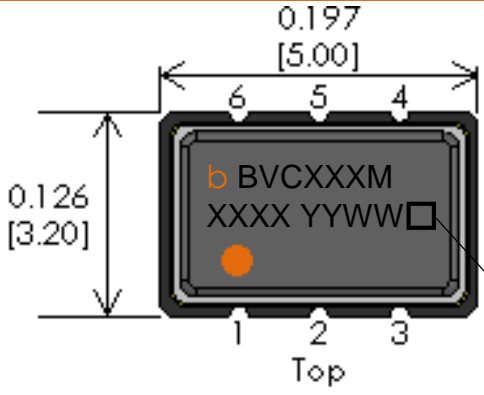


PIN	FUNCTION
1	EFC/N.C.
2	Output Control
3	Ground
4	RF Output
5	N.C.
6	Supply Voltage

Tolerances (mm) .X = ± 0.5, .XX = ± 0.2 unless otherwise specified

Notes
1) None

Tape and Reel

Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)

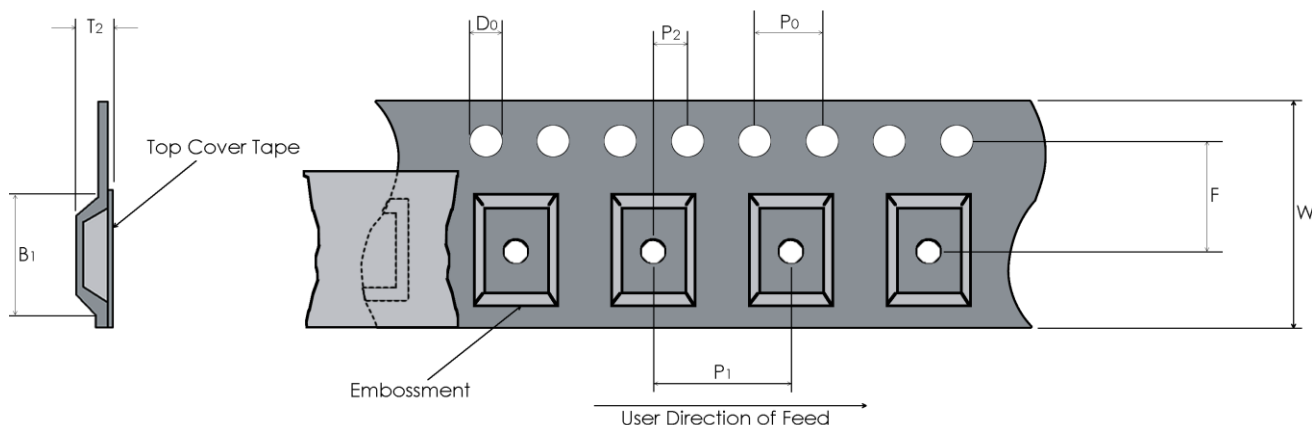

Tape Dimensions (mm)							Reel Dimensions (mm)		
W	F	Do	Po	P1	P2	B1	T2	Outside Dia.	Parts / Reel
12	5.5	1.5	4.0	8	2.0	5.5	1.7	180	1000

Recommended Reflow Profile

Reflow Profile: in accordance to IPC/JEDEC J-STD-020 (Latest Revision)

Additional Notes:

- This part has been designed for pick and place reflow soldering
- This part may be reflowed once
- This part should not be reflowed in the inverted position

Packaging

Packaging: All packaging must conform to ESD Controls detailed in ANSI/ESD S20.20 (Latest Revision)