



FEATURES

- ✓ Ultra Low Phase Noise
- ✓ Excellent Frequency Stability Over Temperature Range
- ✓ Standard Frequency 100 MHz
- ✓ Excellent long-term aging
- ✓ 25x25mm Package


#blileytakesyoufurther

Oven Controlled Oscillator


Description

Apollo high performance, miniature OCVCXO spans a wide frequency range and is specifically designed for applications requiring superior noise performance out to a 100kHz offset. It is ideal for phase-locked microwave signal sources such as DROs, low noise test equipment, microwave com-systems, and radar applications.

Block Diagram

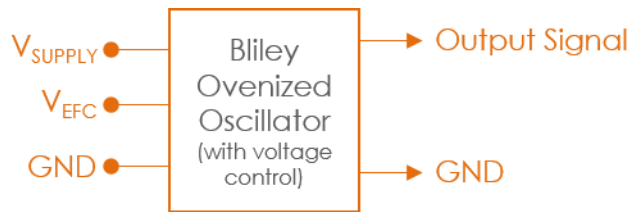

Part Number Configuration

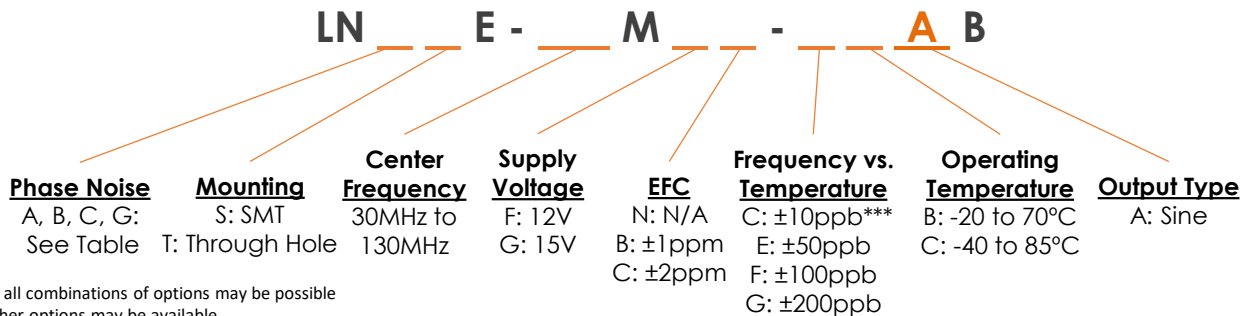

*Not all combinations of options may be possible
 **Other options may be available
 ***High stability available at lower frequencies upon request

Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Input					
Frequency Range		30		130	MHz
Initial Tolerance	@ +25°C±1°C			±0.25	ppm
Warm Up Time	To initial tolerance			5	Min
Frequency Stability					
vs. Temperature	See Options (Max) Referenced to +25°C	±10 ^{***} , ±50, ±100, ±200			ppb
vs. Load	± 10% Δ in Load	±5.0			ppb
vs. Supply Voltage	± 5% Δ in supply	±5.0			ppb
ADEV (Short Term Stability)	T = 1 second	5E-12			
Aging (after 30 days operation)	Per Day	±5.0			ppb
	1 st Year	±0.5			ppm
	10 Years	±1.0			ppm
	15 Years	±1.5			ppm
Supply Voltage (Vdd)	Option F	11.4	12	12.6	Vdc
	Option G	14.25	15	15.75	Vdc
Power Dissipation					
Start Up	@ Minimum ambient temp	4.8			W
Steady State	@ +25°C	1.5			W
Electronic Frequency Control					
Voltage Range		0		Vdd	Vdc
Center Voltage		Vdd/2			Vdc
Frequency Range	See Options (Min)	±1.0, ±2.0			ppm
Slope		positive			
Input Impedance		100			kΩ
Linearity		10			%

Values listed above are typical performance of 100MHz ***High stability available at lower frequencies upon request

DISCLAIMER: Bliley Technologies, Inc. reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Performance Specifications

Parameter	Conditions	Values			Unit
Output Characteristics (Sinusoid)		MIN	TYP	MAX	
Output Level			10		dBm
VSWR	Into 50 Ω		2:1		
Spurious				-80	dBc
Harmonics				-30	dBc
Load		45	50	55	Ω

Parameter	Conditions	Values		Unit
Phase Noise		A*	B	
Phase Noise (10 MHz)	Tested at +25°C			
	1Hz	-100	-95	dBc/Hz
	10Hz	-130	-125	dBc/Hz
	100Hz	-152	-152	dBc/Hz
	1kHz	-160	-160	dBc/Hz
	10kHz	-170	-165	dBc/Hz
	100kHz	-170	-165	dBc/Hz

Parameter	Conditions	Values			Unit
Phase Noise		A* & G*	B	C	
Phase Noise (100 MHz)	Tested at +25°C				
	10Hz	-103	-100	-95	dBc/Hz
	100Hz	-133	-130	-125	dBc/Hz
	1kHz	-157	-155	-145	dBc/Hz
	10kHz	-172	-168	-160	dBc/Hz
	100kHz	-175	-172	-170	dBc/Hz

Note: *Specified phase noise performance is subject to Export Control restrictions


- "A" level phase noise subject to availability
- "G" option is A level phase noise with G-sensitivity screening

DISCLAIMER: Bliley Technologies, Inc. reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Environmental Compliance

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operational Temperature	Option B	-20		+70	°C
	Option C	-40		+85	°C
Storage Temperature		-55		+95	°C
Seal	MIL-STD-202 Method 112 Test Condition D				
Shock	MIL-STD-202G Method 213 Test Condition C				
Random Vibration	MIL-STD-810G Method 514 Test Procedure I				
Sinusoidal Vibration	MIL-STD-202G Method 204 Test Condition A				
MTTF	Calculated using MIL-HDBK-217		153,300		Hours
Acceleration Sensitivity	Typical of 100MHz		1		ppb/g
	"G" phase noise option			0.2	ppb/g

Physical Specifications – Through Hole

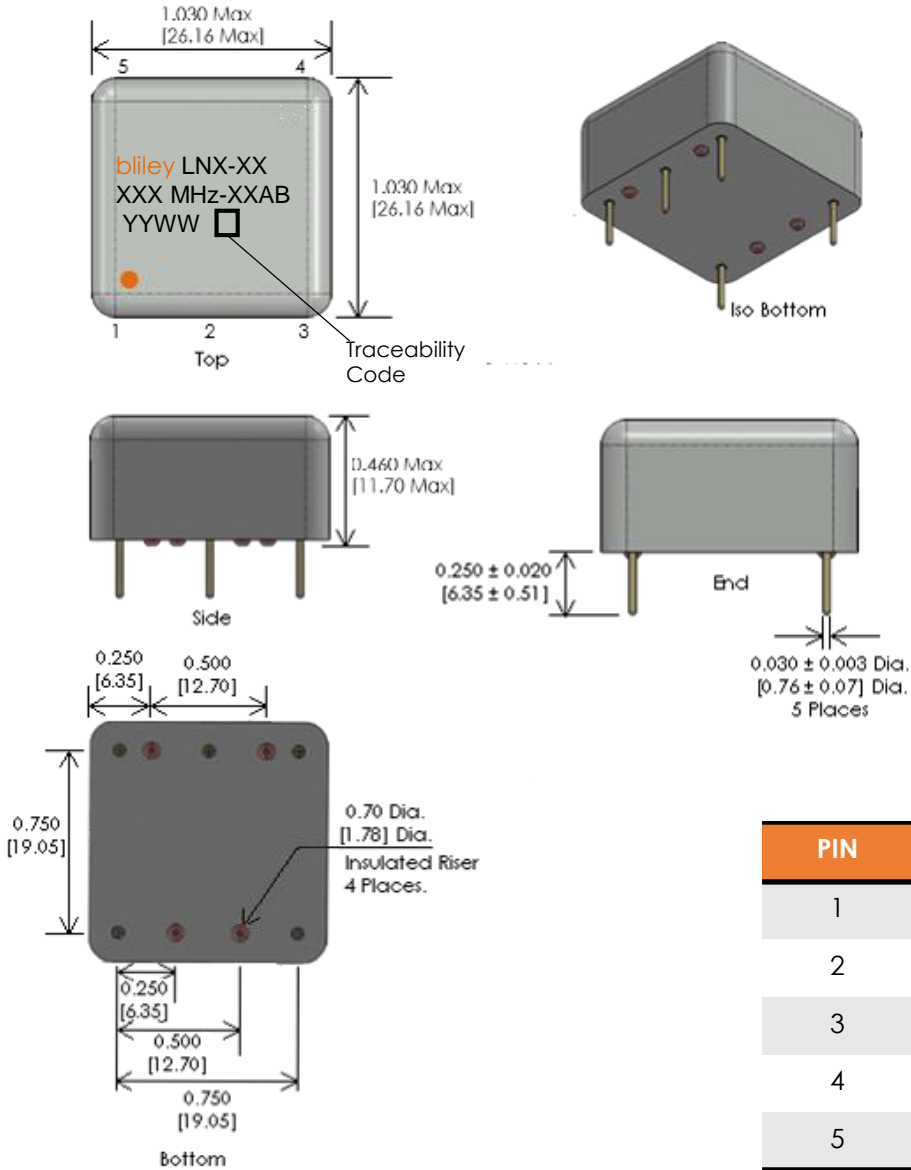

PIN	FUNCTION
1	RF Output
2	Ground
3	EFC/N.C.
4	N.C.
5	Supply Voltage


Tolerances (mm) .X = ± 0.5, .XX = ± 0.2 unless otherwise specified



Notes:

- Non-RoHS available upon request

Physical Specifications – Surface Mount

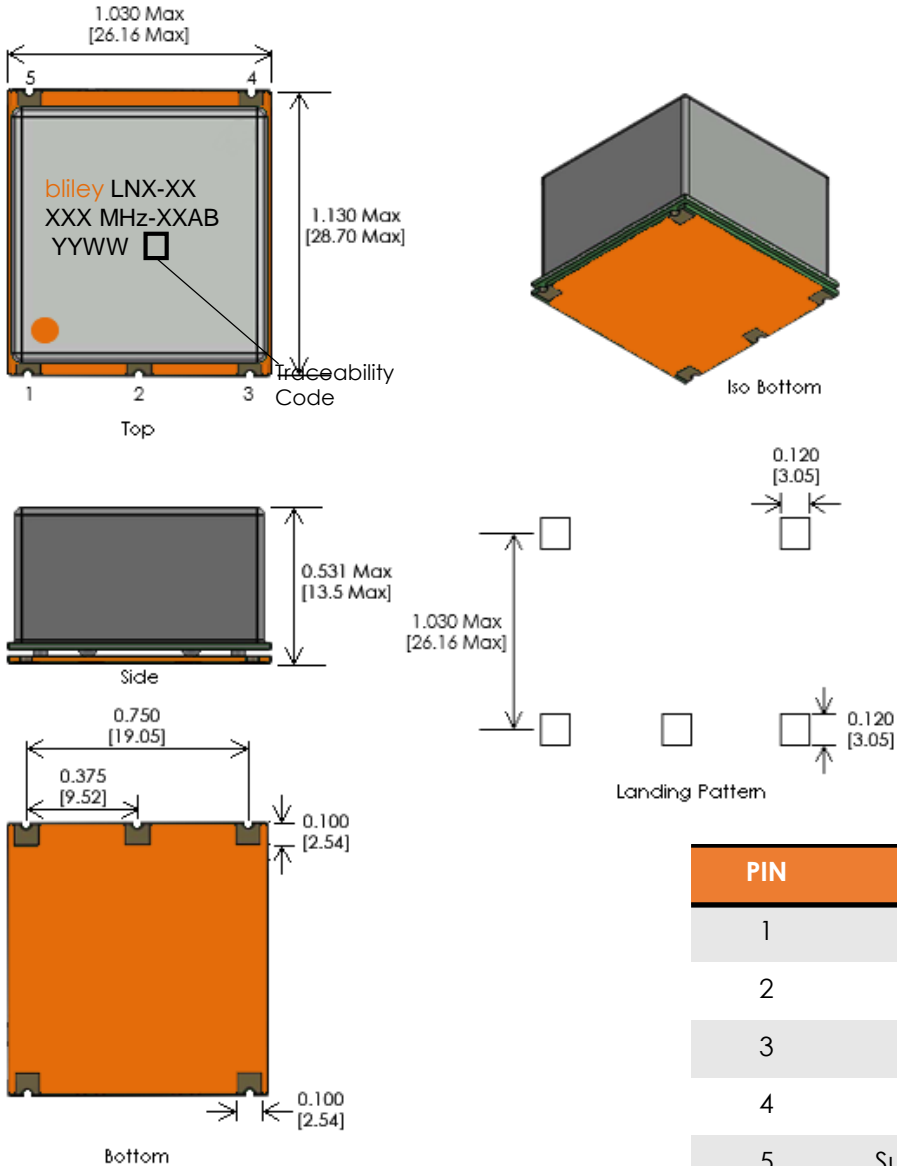

PIN	FUNCTION
1	RF Output
2	Ground
3	EFC/N.C.
4	N.C.
5	Supply Voltage

Tolerances (mm) .X = ± 0.5, .XX = ± 0.2 unless otherwise specified



Notes:
 • Non-RoHS available upon request

DISCLAIMER: Bliley Technologies, Inc. reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.