



## FEATURES

- ✓ Extended Operating Range (-40 to 85°C)
- ✓ SMD Construction
- ✓ Standard 3x3mm Package
- ✓ RoHS Compliant


## Surface Acoustic Wave Filter

#blileytakesyoufurther

### Description

Bliley Surface Acoustic Wave (SAW) filters use Inter-Digital Transducers (IDTs) which enable highly miniaturized filters that can be used for Radio Frequency (RF) signal processing. Bliley rigorous Quality Control Standards provides the framework to provide consistent lot to lot product performance. Bliley SAW Filters are utilized in applications consisting of: Avionics, Instrumentation, Military, SATCOM and DATACOM.

### Block Diagram

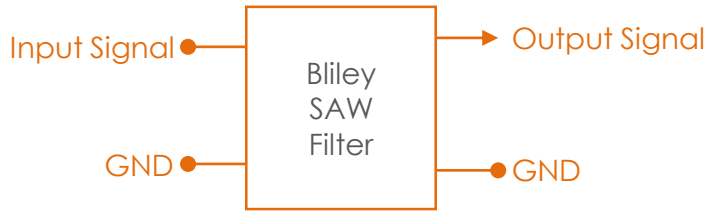

### Part Number Configuration

**BSFSD – 1575 M 42 – S C A T**

<b>Center Frequency</b> 1575.42MHz	<b>Bandwidth</b> S: Special ±1.023MHz	<b>Operating Temperature</b> C: -40°C to +85°C	<b>Termination Impedance</b> A: 50Ω
---------------------------------------	---	---	--

**DISCLAIMER:** All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.


## Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
General		MIN	TYP	MAX	
Center Frequency			1575.42		MHz
Bandwidth	@-3dB	±1.023			MHz
Amplitude Ripple	In passband		0.15	1	dB
Insertion Loss	In passband		1.5	2.0	dB
Group Delay Variation	In Passband		5	12	nSec
Attenuation	Reference Level from 0 dB: 10-1000 MHz	60	64		dB
	Reference Level from 0 dB: 1500 MHz	40	48		dB
	Reference Level from 0 dB: 1700 MHz	50	56		dB
	Reference Level from 0 dB: 1700-2200 MHz	43	46		dB
VSWR	1574.22-1576.62MHz		1.1	2.0	
Termination Impedance (Source and Load)	Zin = Zout	47.5	50	52.5	Ω
Input Power			0	10	dBm
Temperature Coefficient			-36		ppm/°C

## Environmental Compliance





Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operating Temp Range		-40		+85	°C
Storage Temp Range		-55		+105	°C
Shock	MIL-STD-202 Method 213 Test Condition A				
Vibration	MIL-STD-202 Method 214 Test Condition 1C				
Thermal Shock	MIL-STD-202 Method 107 Test Condition A-1				
Altitude	Mean Sea Level			50,000	ft
Moisture Resistance	MIL-STD-202 Method 106 Test Condition C	90%		98%	RH

## Measurement Circuit

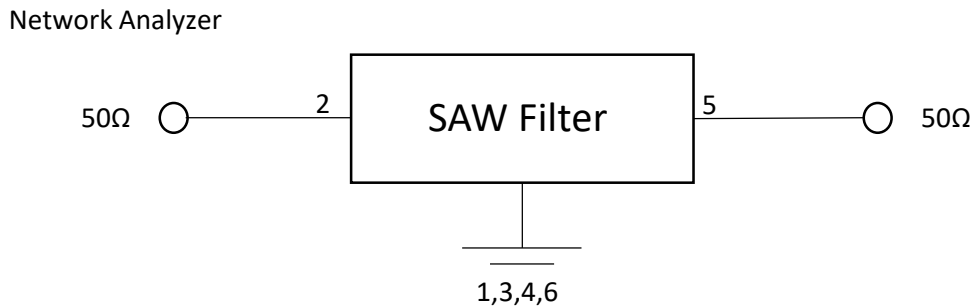


**DISCLAIMER:** All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

# Physical Specifications

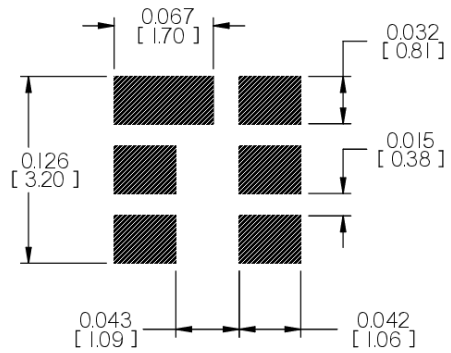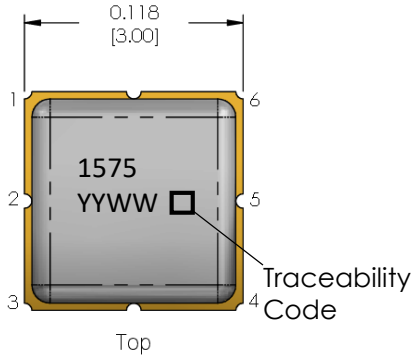

Recommended Landing Pattern

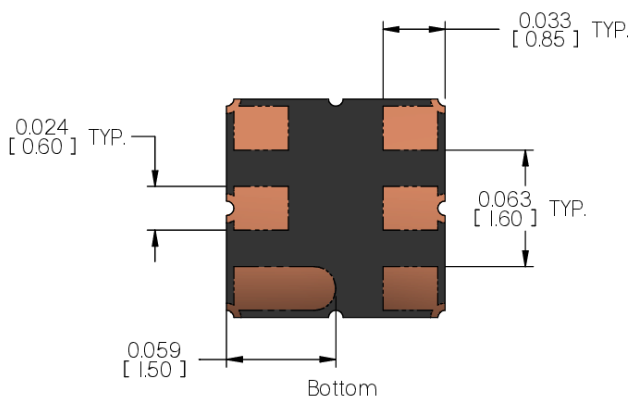

Pin Connections	
1	Ground
2	Input
3	Ground
4	Ground
5	Output
6	Ground


Tolerances (mm) .X = ±0.5, .XX = ±0.2 unless otherwise specified

Notes:

**DISCLAIMER:** All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

## Tape and Reel

### Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)

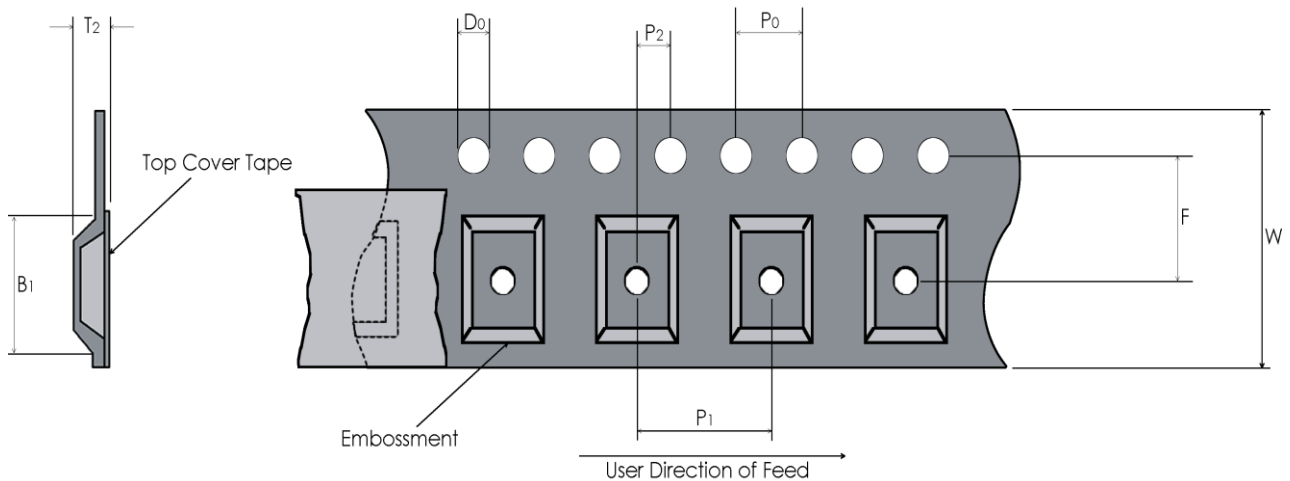

Tape Dimensions (mm)				Reel Dimensions (mm)					
W	F	Do	Po	P1	P2	B1	T2	Outside Dia.	Parts / Reel
12	5.5	1.5	4	8	2	3.3	1.4	330	5000

## Recommended Reflow Profile

**Reflow Profile:** in accordance to IPC/JEDEC J-STD-020 (Latest Revision)

### Additional Notes:

- This part has been designed for pick and place reflow soldering
- This part may be reflowed once
- This part should not be reflowed in the inverted position

## Packaging

**Packaging:** All packaging must conform to ESD Controls detailed in ANSI/ESD S20.20 (Latest Revision)