

FEATURES

- ✓ Operating Range (-40 to 85°C)
- ✓ SMD Construction
- ✓ Standard 2x1.6mm Package
- ✓ RoHS Compliant


Surface Acoustic Wave Filter

#blileytakesyoufurther

Description

Bliley Surface Acoustic Wave (SAW) filters use Inter-Digital Transducers (IDTs) which enable highly miniaturized filters that can be used for Radio Frequency (RF) signal processing. Bliley rigorous Quality Control Standards provides the framework to provide consistent lot to lot product performance. Bliley SAW Filters are utilized in applications consisting of: Avionics, Instrumentation, Military, SATCOM and DATACOM.

Block Diagram

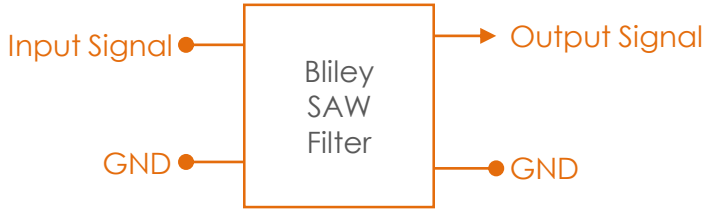

Part Number Configuration

BSFSJ – 1575 M – L C A T

<u>Center Frequency</u> 1575MHz	<u>Bandwidth</u> L: ±16MHz	<u>Operating Temperature</u> C: -40°C to +85°C	<u>Termination Impedance</u> A: 50Ω
------------------------------------	-------------------------------	---	--

DISCLAIMER: All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
General		MIN	TYP	MAX	
Center Frequency	F_0		1575		MHz
Bandwidth	@3dB	± 16			MHz
Insertion Loss	IL_{min}		1.4	3.0	dB
Amplitude Ripple	In passband (1567-1583)		0.3	1.5	dB
Group Delay Ripple	In passband (1567-1583)		5	20	nSec
Attenuation	Reference Level from IL_{min} : 0.3-1529 MHz	25	33		dB
	Reference Level from IL_{min} : 1625-2400 MHz	30	32		dB
Termination Impedance (Source and Load)	$Z_{in} = Z_{out}$	47.5	50	52.5	Ω
Temperature Coefficient			-34		ppm/ $^{\circ}C$
Input Power Level			10	20	dBm


Note: Electrical parameters valid over the full operating temperature

DISCLAIMER: All changes to the product(s) and/or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Environmental Compliance



Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operating Temp Range		-40		+85	°C
Storage Temp Range		-60		+125	°C
Shock	MIL-STD-202 Method 213 Test Condition A				
Vibration	MIL-STD-202 Method 214 Test Condition 1C				
Thermal Shock	MIL-STD-202 Method 107 Test Condition A-1				
Altitude	Mean Sea Level			50,000	ft
Moisture Resistance	MIL-STD-202 Method 106 Test Condition C	90		98	%RH

Measurement Circuit

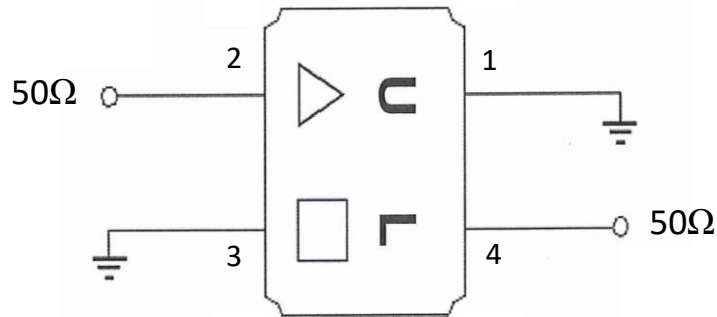

DISCLAIMER: All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.


Physical Specifications

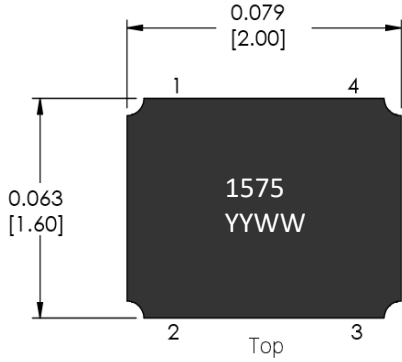


Iso Bottom



Side

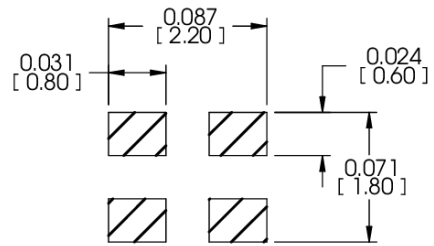

Landing Pattern

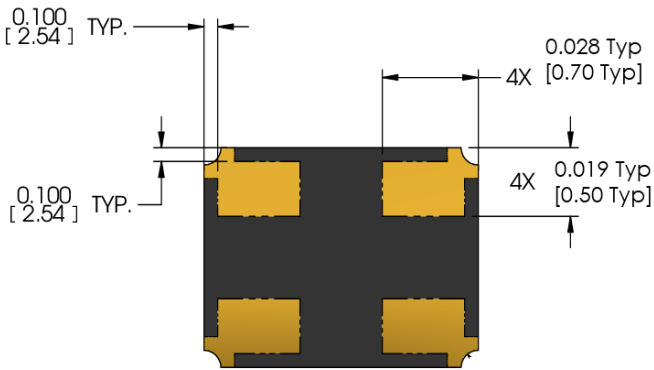

Bottom

Pin Connections	
1	Ground
2	Input
3	Ground
4	Output


Tolerances (mm) .X = ±0.5, .XX = ±0.2 unless otherwise specified

Notes:

DISCLAIMER: All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Tape and Reel

Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)

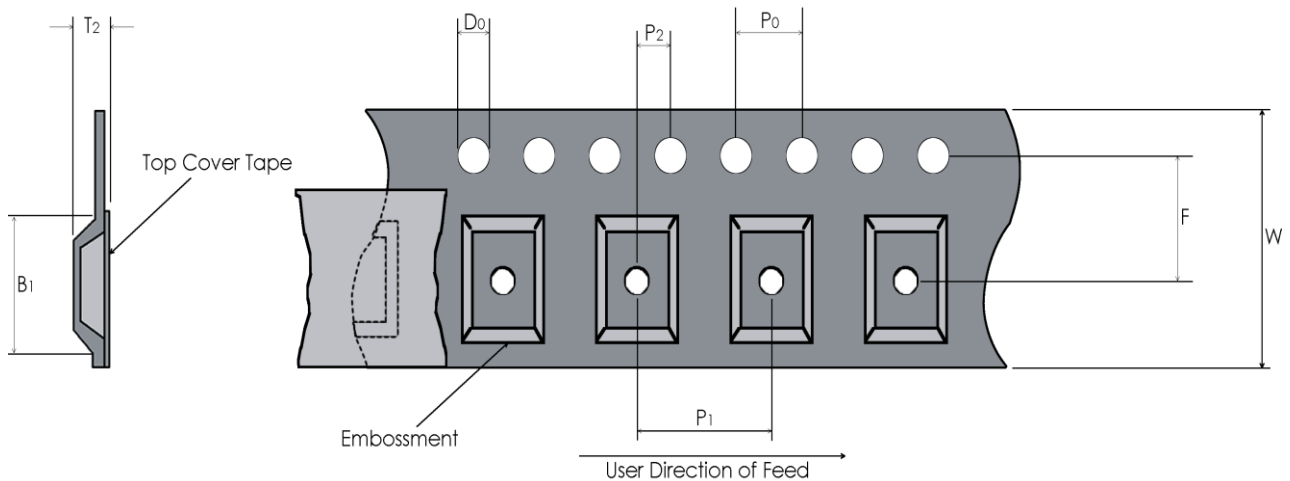

Tape Dimensions (mm)				Reel Dimensions (mm)					
W	F	Do	Po	P1	P2	B1	T2	Outside Dia.	Parts / Reel
8	5.5	1.5	4	4	2	2.3	1	180	5000

Recommended Reflow Profile

Reflow Profile: in accordance to IPC/JEDEC J-STD-020 (Latest Revision)

Additional Notes:

- This part has been designed for pick and place reflow soldering
- This part may be reflowed once
- This part should not be reflowed in the inverted position

Packaging

Packaging: All packaging must conform to ESD Controls detailed in ANSI/ESD S20.20 (Latest Revision)