

GRIFCUT 723

Cutting Fluid Concentrate

Description

GRIFCUT 723 is a low foaming high oil semi synthetic cutting fluid with extra lubricity additives. It is designed for machining ferrous and steel alloys. It is suitable for milling, drilling, reaming, tapping and general purpose machining.



Performance Benefits

- .. Suitable for ferrous and steel machining
- .. Extended sump life
- .. Excellent machining performance
- .. Operator friendly
- .. Stable emulsion

Recommended Concentrations


- .. Light machining 3-5%
- .. Moderate machining 5-7%
- .. Heavy duty machining 7-10%

Typical Characteristics

.. Form.....	Liquid
.. Color	Amber
.. Odor.....	Slight
.. Flash Point	N/A
.. Refractometer Factor ...	1.0
.. pH (5%)	8.9
..	

Refractometer Factor = 1.0

Concentration Chart

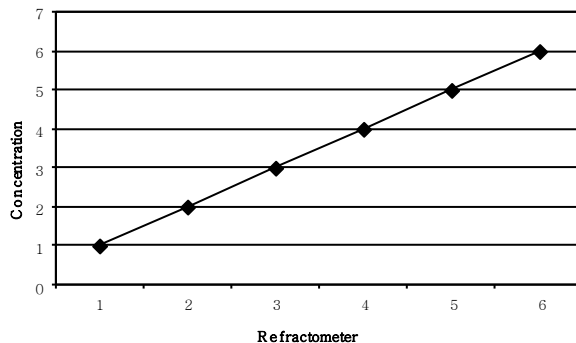

Health & Safety

All reasonable care has been taken to ensure that the information contained in this publication is accurate as of the date of printing, however, such information might change due to changes in the formulation blend occurring subsequent to the date of printing. The SDS must be consulted for appropriate information regarding storage, safe handling and storage.