

Back-Up Power Systems




System Specifications:

Model Number	System Watts/Surge Output	Battery Capacity	Waveform	Physical Size	Weight (lbs)
MCS1210T	1250/2500	100amp hours	Modified	28.25 x 16.5 x 17.75	215
MCS1220T	1250/2500	200amp hours	Modified	28.25 x 16.5 x 17.75	280
MCS1230T	2000/2500	300amp hours	Modified	28.25 x 16.5 x 17.75	365
MCS1240T	2000/2500	400amp hours	Modified Sine	28.25 x 16.5 x 17.75	460
MCS2014T	2000/4000	140amp hours	Modified	28.25 x 16.5 x 17.75	220
MCS2020T	2000/4000	200amp hours	Modified Sine	28.25 x 16.5 x 17.75	290
MCS2030T	2000/4000	300amp hours	Modified Sine	28.25 x 16.5 x 17.75	375
MCS2040T	2000/4000	400amp hours	Modified Sine	28.25 x 16.5 x 17.75	460
MCS2060T	2000/4000	600amp hours	Modified Sine	28.25 x 16.5 x 17.75	495
MCS2060T	2000/4000	600amp hours	Modified Sine	28.25 x 16.5 x 17.75	495
MCS2080T	2000/4000	800amp hours	Modified Sine	28.25 x 16.5 x 17.75	740
MCS3120M	3100/4000	200amp hours	Modified Sine	28.25 x 16.5 x 17.75	230
MCS3130M	3100/6000	300amp hours	Modified Sine	28.25 x 16.5 x 17.75	315
MCS3140M	3100/6000	400amp hours	Modified Sine	28.25 x 16.5 x 17.75	400
MCS3160M	3100/6000	600amp hours	Pure Sine	28.25 x 16.5 x 17.75	495
MCS3180M	3100/6000	800amp hours	Pure Sine	28.25 x 16.5 x 17.75	575
MCS4020MS	4000/8000	200amp hours	Pure Sine	28.25 x 16.5 x 17.75	230
MCS4060MS	4000/8000	600amp hours	Pure Sine	28.25 x 16.5 x 42.25	495
MCS4440MS	4400/8800	400amp hours	Pure Sine	28.25 x 16.5 x 17.75	400
MCS4480MS	4400/8000	800amp hours	Pure Sine	28.25 x 16.5 x 42.25	740
MD2014T	2000/4000	140amp Hours	Modified	28.25 x 16.5 x 17.75	220
MD2020T	2000/4000	200amp hours	Modified	28.25 x 16.5 x 29.75	290
MD2030T	2000/4000	300amp hours	Modified	28.25 x 16.5 x 29.75	375
MD2040T	2000/4000	400amp hours	Modified	28.25 x 16.5 x 29.75	460
MD3020T	3000/6000	200amp hours	Modified	28.25 x 16.5 x 29.75	290
MD3030T	3000/6000	300amp hours	Modified	28.25 x 16.5 x 29.75	375
MD3040T	3000/6000	400amp hours	Modified	28.25 x 16.5 x 29.75	425
MD3060T	3000/6000	600amp hours	Modified	28.25 x 16.5 x 42.25	495
MD3080T	3000/6000	800amp hours	Modified	28.25 x 16.5 x 42.25	740
MD4020MS	4000/8000	200amp hours	Modified	28.25 x 29.75 x 14.5	230
MD4060MS	4000/8000	600amp hours	Modified	28.25 x 16.5 x 42.25	495
MD4440MS	4400/8800	400amp hours	Pure Sine	28.25 x 29.75 x 14.5	400
MD4480MS	4400/8800	800amp hours	Modified	28.25 x 29.75 x 14.5	740
MD8880MS	8800/1600	800amp hours	Modified	28.25 x 29.75 x 14.5	825

Back-Up Power Systems

Dimensions:

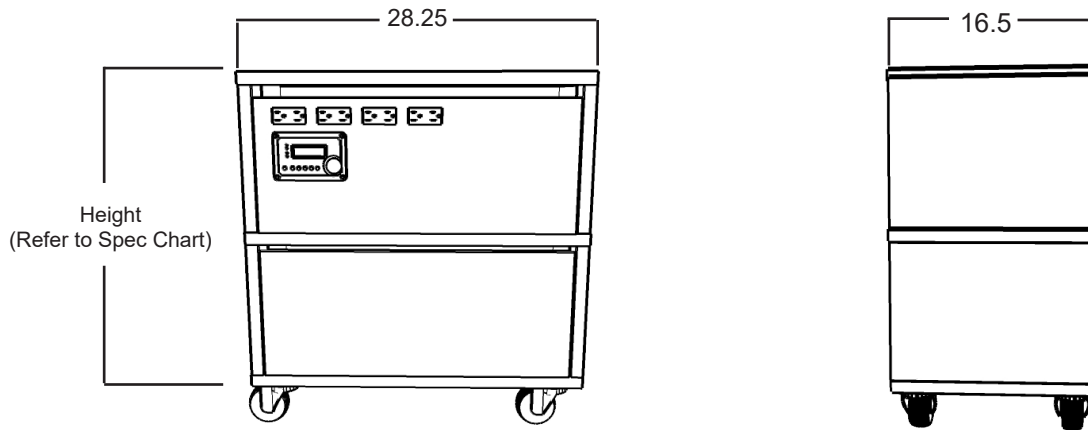


Options and Features:



Optional Hardwire

30amp twist lock receptacles enables easy hardwire applications.



Plug & Play

Unit also includes 4 standard wall outlets and a standard 15 amp plug for recharging.



Optional Power Outage Alert system

This power outage alert system signals when the input power is lost. Allowing the user time to move the cold stored products during an extended outage.

Electrical Input/Output Power:

System Wattage	Input Voltage	Input Plug NEMA	Output Outlets Qty & NEMA
1200	120	15 amp NEMA 5-15	4 Duplex 15 amp
2000	120	15 amp NEMA 5-15	4 Duplex 15 amp
3100	120	20 amp NEMA 5-20	3 - 15 amp & 1 - 20 amp Duplex or Specify
4000	120	20 amp or Specify	3 - 15 amp & 1 - 20 amp Duplex or Specify
4400	120	20 amp or Specify	3 - 15 amp & 1 - 20 amp Duplex or Specify