
medTV¹⁹

19" Arm-mounted Patient HDTV



NEW RF-HEMIS™ Centrally manage medTVs using the RF-HEMiS Head-end Management Integrated TV System by PDi. Set it and forget it.

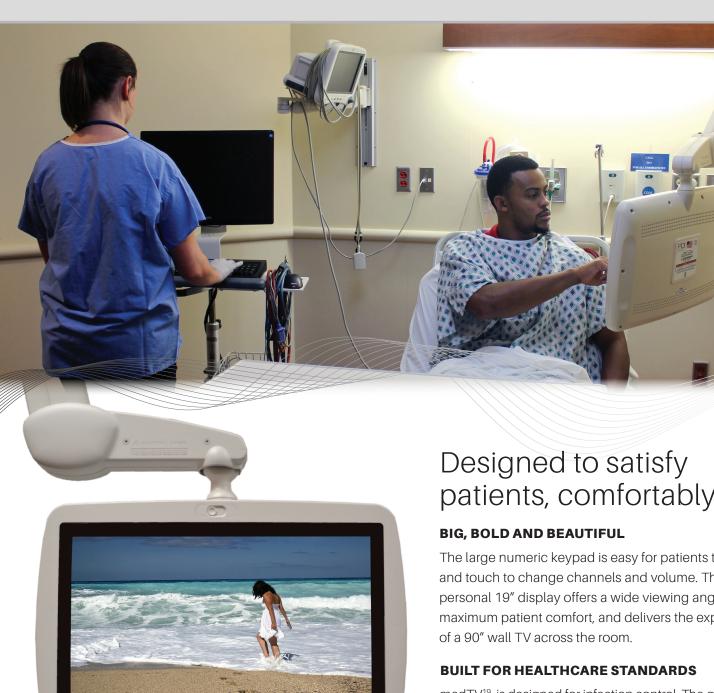

patients, comfortably.

The large numeric keypad is easy for patients to see and touch to change channels and volume. This personal 19" display offers a wide viewing angle for maximum patient comfort, and delivers the experience

medTV¹⁹ is designed for infection control. The glass front can withstand rigorous cleanings and the antimicrobial plastics help limit HACs. Compatible with PDi low-voltage power supplies and swing arm mounts or designed for rear mount to a standard 75x75 VESA pattern.

DELIVERS PATIENT SATISFACTION

Pro:Idiom® makes it easy to keep every patient entertained with more HD channels. This securely mounted TV display reduces neck, back, and eye strain. Patients enjoy the front-facing speakers and headphone jack.

KEY FEATURES



UL Listed, low voltage, widescreen HDTV



Large, easy to push, direct entry channel buttons allow patients to access their favorite channels with ease



Front facing speakers and headphone jack minimizes noise and keeps the floor/unit quiet



Extended panel life, designed to last more than 7 years when powered on 18+ hrs/day



New RF-HEMiS or easy USB cloning makes TV set-up and updates quick and simple



Password protected set-up menus prevent patients from altering settings with IR remotes or remote control phone apps



Channel aliasing and remapping allows facility to customize and simplify channel line-ups



Compatible with PDi swing arms or available as VESA 75 x 75 mm mount resulting in a mounting solution for any situation



Standard cabinet color is Starlight Gray. Ask about black or cream.



Designed, Programmed and Assembled in U.S.A.

Pro:Idiom

DOLBY AUDIO

Standard 2 year Warranty. 4 year Gold Vision Service (GVS) Warranty Available.

PANEL

Diagonal Size	18.5" (47cm)
Display Resolution	1366 x 768
Contrast Ratio	1000:1
Viewing Angle	170° (H) / 160° (V)
Luminance	300 nits
Backlight Life	50,000 hours
Backlight Type	LED

INPUT/OUTPUT

1141 01/0011 01	
RF Input (TV)	1 (75ohm Unbalanced)
HDMI	2, Optional
CCI, MTI, Composite (call to inquire about additional inputs available)	Optional
Universal Pillow Speaker	Optional
Speakers	2x2-Watt RMS
Front Headphone	Yes, 1/8" jack

REGULATORY

UL/cUL 60065 Annex Q	Yes
FCC Title 15, Part 47, Subpart B	Yes
RoHS	Yes

SUPPORT STANDARDS

Antenna Input	NTSC, ATSC, Qam in the Clear (Air VHF/ UHF,CATV,IRC,HRC)
Dolby Audio™	Yes
MPEG-4 & MPEG-2	Yes
Pro: Idiom ®	Yes

SET-UP FEATURES

Audio Volume Limiter (AVL)	Yes
Internal Speaker Disable	Yes
Min/Max Volume Limiter	Yes
Start/ Power-on Volume	Yes
USB or RF-HEMIS Cloning Capable - TV Cloning - Firmware Updates	Yes
PDi Program Remote Compatible	PD108-420
Parental Control (V-CHIP)	Yes
Auto Power On	Yes
Programmable Source Selection	Yes
Password Protected Set Up Menus	Yes
Channel Enable/Disable	Yes
Channel Aliasing/ Remapping	Yes
Menu OSD	English/French/ Spanish
Factory Reset	Yes
POWER	

Source	Power over Coax
Max Consumption	34W
Standby Consumption - Normal	9.8W
Standby Consumption - Low	1.4W

DIMENSIONS

Weight	12 lbs. (5.9 kg)
Unit Dimension - Swivel	20" x 17" x 2.5"
(W/H/D)	508 x 432 x 64 (mm)
Unit Dimension - VESA	20" x 13.75" x 2.5"
(W/H/D)	508 x 349 x 64 (mm)

PART NUMBERS*

PDI-P19TV-GA-C	19" Arm-mounted TV Model, Gray, Coax
PDI-P19TV-GB-C	19" Arm Mounted TV Model, Gray, Coax, CCI
PDI-P19TVR-GA-C	19" Rear VESA Mounted TV Model, Gray, Coax
PDI-P19TVR-GB-C	19" Rear VESA Mounted TV Model, Gray, Coax, CCI
* Part numbers vary based on custom cable, color, or power options. Call for more information.	

NOTE: Some screen images are simulated. Dimension and weights are approximate. Design specifications and features are subject to change without notice.

Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories.



Document Number: MAR-823-P101v2