

Floating Walkway



OVERVIEW

Coerco Floating Walkway is designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water.

FEATURES

- Manufactured from Durable, Lightweight, UV Stabilised Polyethylene
- Chemical Resistant
- Anti-Slip
- Optional bolt on walkway cleats to comply with AS1657-2003 clause 5.3.3 <18 degrees
- Hi-visibility handrails to comply with AS1657
- Modular Construction (Flat packed for transport)



Floating Walkway

SPECIFICATIONS

Specification Summary

Supply and install of Coerco Floating Walkway is as per manufacturer Coerco Pty Ltd recommendations.

System Applications

Coerco Floating Walkway is designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water.

Materials

Coerco Floating Walkway is manufactured from high quality, impact and chemical resistant low-density polyethylene certified to AS/NZS 4020:2002 and AS2070 Part 1.

Galvanizing process in accordance with AS/NZS 4680, AS/NZS 4791 and AS/NZS 4792

Fixings are in accordance with Australian Standard AS 1110.1.

WARRANTY

Warranty

Coerco Pump Pontoons are manufactured to the highest quality standards using Australian Made Materials. Coerco Floating Walkway is covered by manufacturer's warranty. Please refer to Section 1.22 in the Coerco Warranty Conditions for more information.

Inspection & Maintenance

Coerco recommends visual inspection for any damage or loose fixings is recommended periodically and prior to use.

Maintenance should be carried out by competent personnel. Basic wear and tear preventative maintenance is recommended.

COMPLIANCE

Compliance


Coerco Floating Walkway is manufactured in accordance with Australian Standards where applicable.

AS/NZS 4020:2002	As standard Coerco Floating Walkway complies up to 10 degrees. Optional bolt on cleat panels available to comply with AS 1657-2003 clause 5.3.3 >18 degrees.
AS2070 Part 1	
AS/NZS 4680	
AS/NZS 4791	
AS/NZS 4792	
AS 1110.1	

Important Note

Failure to supply and/or install product in accordance with above specification and installation/usage guidelines voids complete system certification and/or warranty.

Floating Walkway

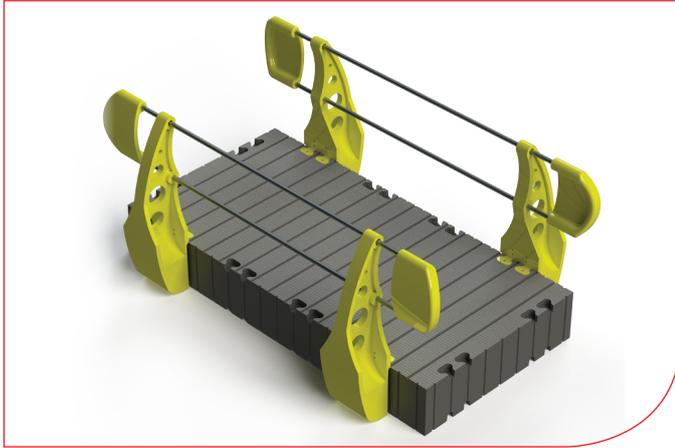

Features

- Manufactured from Durable, Lightweight, UV Stabilised Polyethylene
- Chemical Resistent
- Anti-Slip
- Optional bolt on walkway cleats to comply with AS1657-2003 clause 5.3.3 <18 degrees
- Hi-visibility handrails to comply with AS1657
- Modular Construction (Flat packed for transport)

Floating Walkway

Code	Description
WLK-3015	Floating poly walkway (3000 x 1500mm)