





# CAPSTONE M *Series*

**M Series Closer**  
Closes Top-Load, Tri-Seal Cartons

# CAPSTONE M *Series*

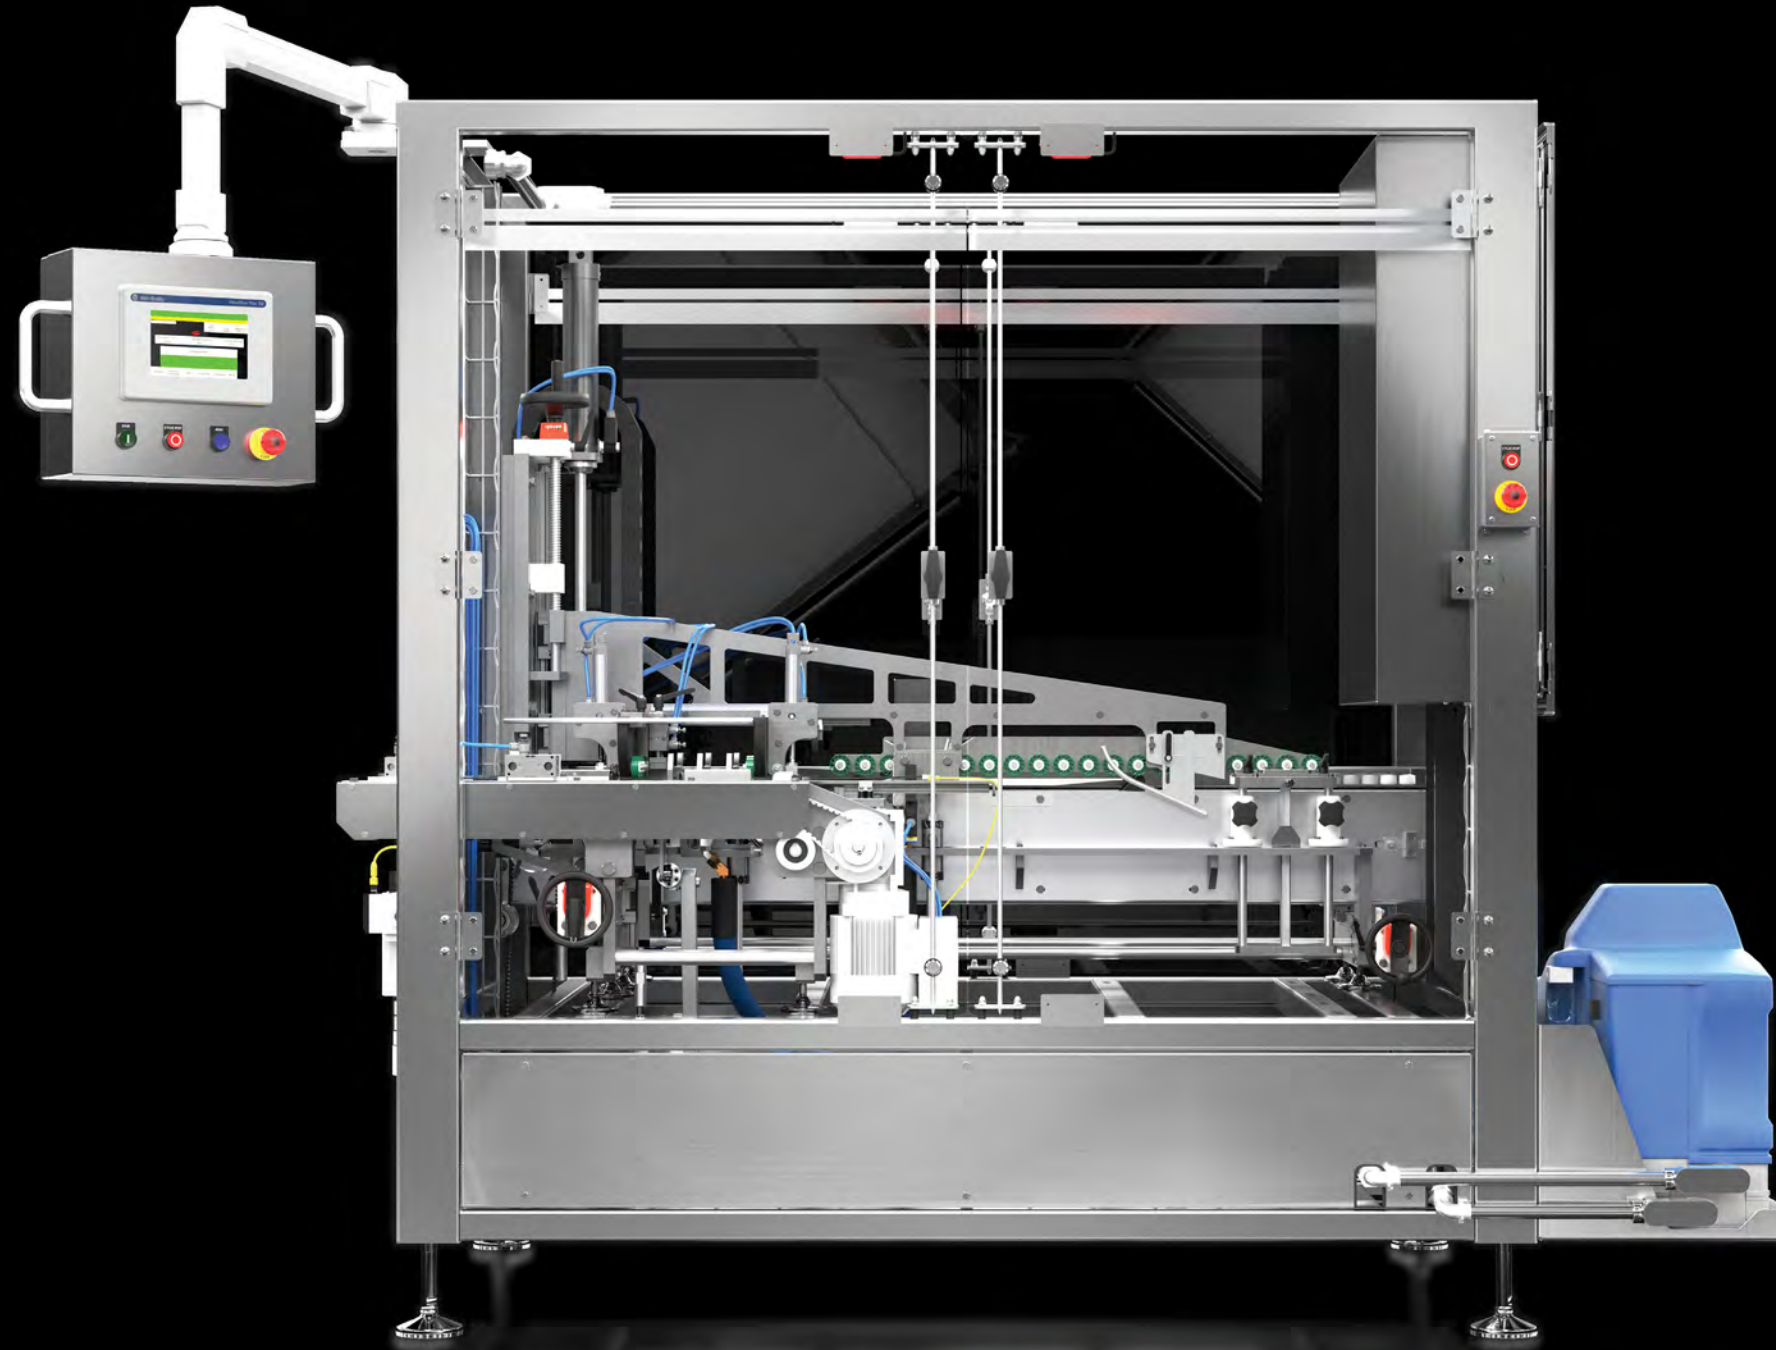


## FEATURES




Compact Footprint



Through-Flow Layout




Auto-Open




Perfectly Square Carton Corners




3 Minute Changeover



Tri-Seal Cartons



Front-Flap Seal Cartons



Maximum Finished Carton Size



Closes Paperboard and Corrugated Board Cartons



Speeds up to 50/min

# CAPSTONE M *Series*



## KEY FEATURES

Compact-Inline Footprint  
Closes Paperboard and Corrugated Material  
Simple 3 Minute Tool-Less Changeover  
Creates High Quality, Closed Cartons



## MACHINE LAYOUT

Right Hand      Inline Discharge  
Left Hand        Inline Discharge



## CONTROL SYSTEM

PLC                Allen-Bradley Compact Logix  
HMI                Allen-Bradley Panelview 700 or 1000  
Safety System    Category III



## ENCLOSURE CONFIGURATIONS

Main Enclosure    NEMA 12, NEMA 4 (SS) or NEMA 4X(SS)  
Panel Cooling     Vortex, Heat Exchanger or Air-Conditioner



## UTILITIES

Power              480v 50/60hz 3ph  
Air                  15 SCFM @ 80PSIG



## DIMENSIONS

Weight             2,400 lbs.  
Overall Length    72" (1830 mm)  
Overall Width     48" (1220 mm)  
Overall Height    78" (1980mm)



## MACHINE OPTIONS

Open Flap Detection    Operator Notification for Open Flaps  
Elevation                Top of Converyor Height 36"  
Status Glow             Bright Internal LED Status Lights  
Extreme Washdown     For Demanding Environments  
Electrical Enclosure    Stand-Alone Enclosure Available

Please call (800) 328-5558 to discuss custom configurations and applications.

