




## Particle E Series

Cloud-integrated hardware platform for cellular IoT devices

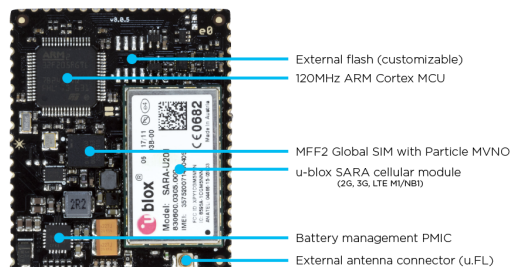

**Particle E Series modules**  
36.0 x 43.0 x 4.6 mm

### World's first fully-integrated cellular hardware platform with out-of-box Cloud connectivity and support for 2G, 3G, and LTE M1/NB1 technologies.

- **All-in-one hardware design.** The E Series integrates a MCU, cellular radio, external flash storage, power and charge management, and external antenna connector into a single hardware platform
- **Fully certified.** E Series modules are FCC/CE/IC/PTCRB End-Product certified (pending), minimizing burden on product creators
- **Low profile design.** E Series modules are compatible with small and thin enclosure designs
- **Machine placeable.** E Series modules are ready for mass production with SMT-compatible tray packaging
- **Worldwide compatibility.** E Series modules have global support with lower-cost regional variants available

#### Product description

Particle's E Series module platform is the World's simplest solution for developing and deploying cellular-connected IoT products.

#### Hardware Features

1. *Powerful ARM Cortex MCU (120MHz)* with ample GPIO for reading from sensors and driving motors and actuators
2. *Best-in-class 2G/3G GSM modem* with worldwide support and lower cost regional variants available upon request.
3. *Embedded IoT SIM card* compatible with Particle's MVNO service with no-contract, out-of-box service in more than 100 countries
4. *Expandable flash storage* for sensor data and/or backup application firmware
5. *Flexible power management system* with built-in support for Li-Po batteries and dedicated DC power supplies

#### Robust design

E Series modules are surface mountable and feature a integrated SIM cards and extended temperature range compatibility that make them a robust choice for deployment in a wide range of conditions.

#### Fastest path to market for 2G, 3G, LTE products

The E Series contains the same hardware and MCU architecture as our popular Electron development kit, so your application firmware translates seamlessly from prototype to production.

Future LTE-enabled products from Particle will be released in the E Series form factor, so upgrading your product is as simple as swapping out a part on your bill of materials.

The E Series is available in 2G/3G variants today. Particle will release variants with LTE M1/NB1 connectivity in early 2018.

#### Fully certified

E Series modules are certified against a majority of the World's relevant certification standards including FCC/CE/IC/RoHS, as well as End Product certified by the PTCRB (pending).

#### Compatible with Particle Cloud and development tools

All E Series modules are compatible with the Particle Cloud and Particle development tools which provide fully-encrypted messaging, over-the-air firmware updates, and a device management console for administering device firmware, dynamic grouping, and SIM connectivity.



## Features

- u-blox SARA modules for cellular connectivity
  - LTE: SARA-R410M
  - 3G: SARA-U201/U260/U270
  - 2G: SARA-G350 (2G)
- STM32F205RGT6 120MHz ARM Cortex M3 microcontroller
- 1MB flash, 128KB RAM
- BQ24195 power management unit and battery charger
- MAX17043 fuel gauge
- Embedded SIM card, Particle MVNO support in 100+ countries
- Expandable flash memory
- 30 mixed-signal GPIO and advanced peripherals
- Open source design

## Software features

- FreeRTOS
- CoAP encrypted messaging
- Embedded TCP/IP and UDP/IP
- GNU GCC toolchain for ARM Cortex-M processors
- Firmware updates: Over the Air (OTA), USB, UART, JTAG and SWD

## Electrical data

- **Power supply:** 3.88 V to 12 V
- **Power consumption**
  - Operating current (cellular ON): 180 mA to 250 mA
  - Operating current (cellular OFF): 47 mA to 50 mA
  - Peak current: 800mA (3G), 1800 mA (2G)
  - Sleep Current: 0.8 mA to 2 mA

## Product variants

Naming convention -

E + <number of G's> + <regional (0) or global (1)> + <incremental #>

Name	Connectivity	Geography	Band support	Availability
E210	2G only	Global	850/900/1800/1900 MHz	Q4 2017
E301	3G with 2G fallback	Regional (Americas/Aus)	850/1900 MHz	Q4 2017
E302	3G with 2G fallback	Regional (Eur/Asia/Afr)	900/1800/2100 MHz	Q4 2017
E310	3G with 2G fallback	Global	850/900/1800/1900/2100 MHz	Q4 2017
E401	LTE M1	Regional (US)	LTE B13	Early 2018
E402	LTE M1	Regional (N. America)	LTE B2/4/5/12	Early 2018
E410	LTE M1/NB1	Global	Global	Mid 2018

## Further information

- For more information, please contact Particle at <http://particle.io/sales> or send an email to [sales@particle.io](mailto:sales@particle.io)
- For ordering information and pricing, please visit our wholesales store at <http://wholesale.particle.io>

## Package

- 63 pin surface mountable module
- 36.0 mm x 43.0 mm x 4.6mm
- < 10 g

## Environmental data, quality, reliability

- Operating temperature -20 to +85°C (extended range)
- RoHS compliant (lead-free)

## Certifications and approvals

### Wireless certifications

- FCC
- CE
- IC

### Cellular certifications

- PTCRB (End-Product Certified)
- GCF

Please [contact Particle](#) for additional certification details.

## Interfaces

### GPIO:

- 30 GPIOs, individually controllable.
- 12 ADC, 2 DAC, and 13 PWM pins available.

### Serial:

- 3 UART, 2 SPI, 1 I2S, 1 I2C, 2 CAN, and 1 USB 2.0 communication interfaces available.

