2017 Audi A3 E-Tron

Roadside and Towing Information

Roadside Information

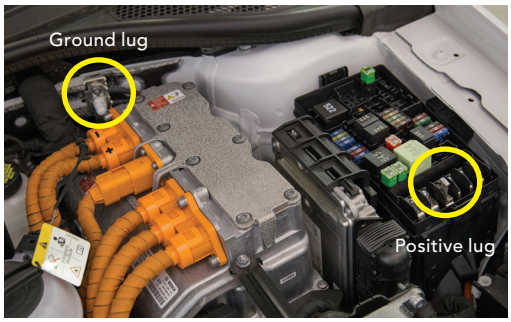

Jump start.

The tool kit and the jack are tethered to the tie down in the cargo area.

There is no spare tire.

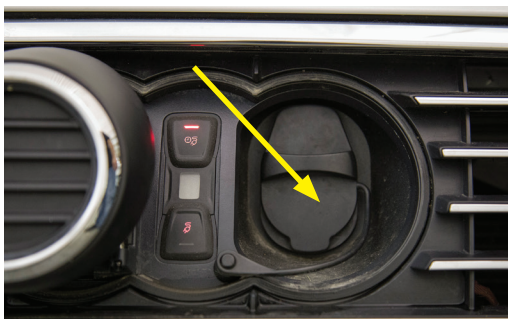

Charging Port Closure

Replace the dust cap after unplugging.

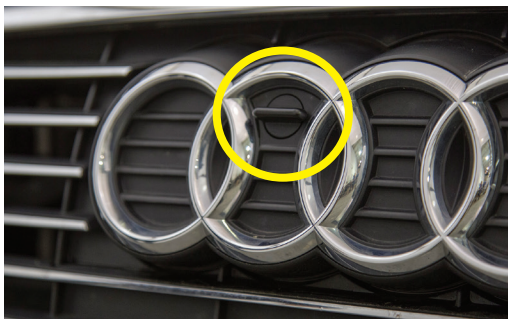

Push closed the charge port cover and twist the latch to secure.

Towing Information

FRONT: Press the top left corner of the front eyelet cover to remove.

REAR: Press the top of the rear eyelet cover to remove.

2017 Audi A3/S3

Roadside and Towing Information

Roadside Information

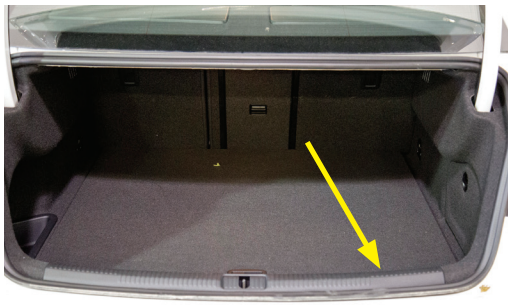

The tool kit is located in the right rear corner of the trunk under the load floor with the spare tire.

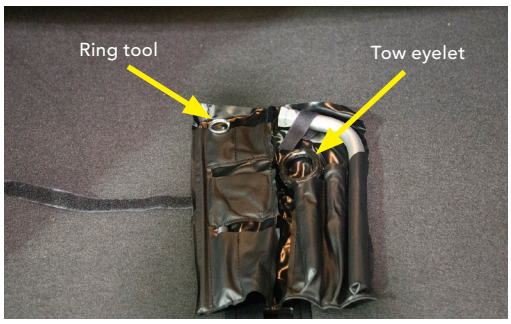

Tool Kit
(Includes the ring tool for wheel lug bolt removal and the tow eyelet.)

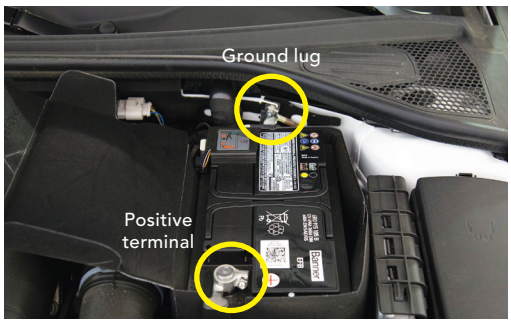

Jump start

Towing Information

FRONT: Press the top left corner of the front eyelet cover to remove.

REAR: Press the top of the rear eyelet cover to remove.

2017 Audi A4 Allroad

Roadside and Towing Information

Roadside Information

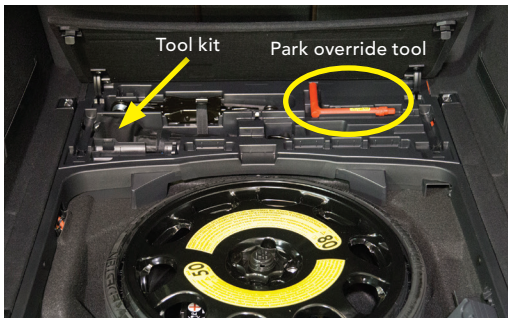

The tool kit is located in front of the spare tire.

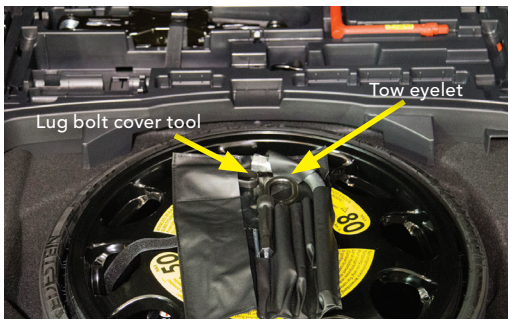

Pictured: Tool kit and the tire mobility kit.

The air compressor is located under the collapsible spare tire.

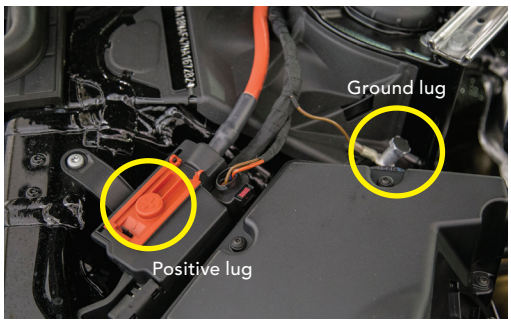

Jump start

Towing Information

FRONT: Press the bottom of the front eyelet cover to remove.

REAR: Press the bottom of the rear eyelet cover to remove.

2017 Audi A4/S4

Roadside and Towing Information

Roadside Information

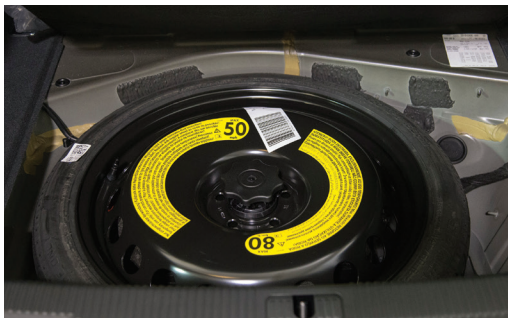

The tool kit is located under the spare tire.

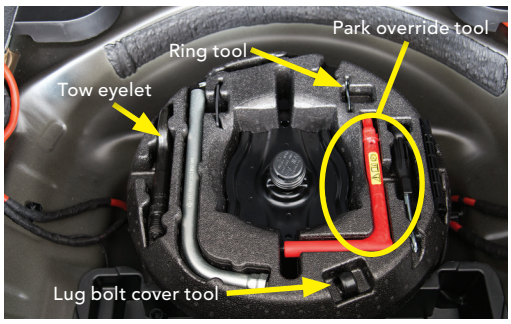

Pictured: Tool kit

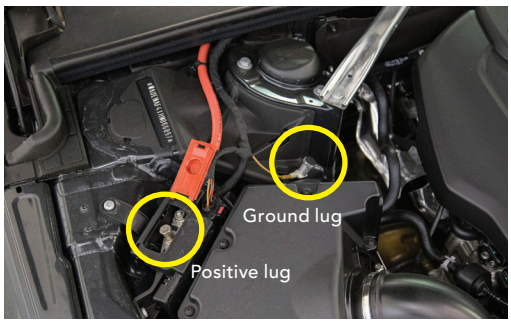

Jump start

Towing Information

FRONT: Press the bottom of the front eyelet cover to remove.

REAR: Press the top of the rear eyelet cover to remove.

2017 Audi A6/S6

Roadside and Towing Information

Roadside Information

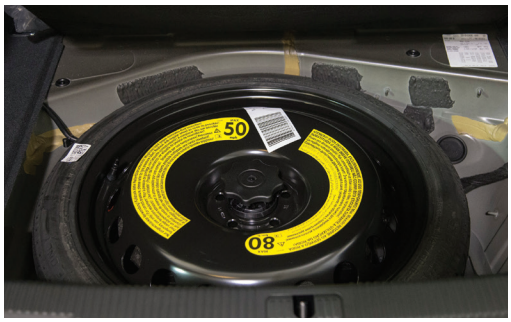

The tool kit is located under the spare tire.

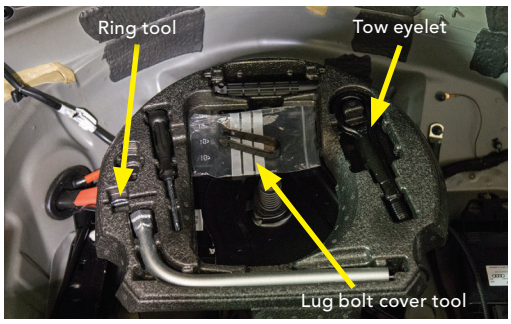

Pictured: Tool kit

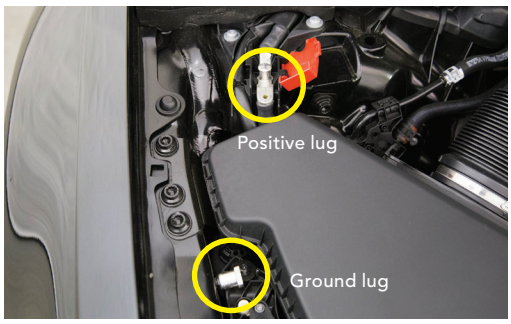

Jump start

Towing Information

FRONT: Press the bottom of the front eyelet cover to remove.

REAR: Press the bottom of the rear eyelet cover to remove.

2017 Audi A7/S7/RS7

Roadside and Towing Information

Roadside Information

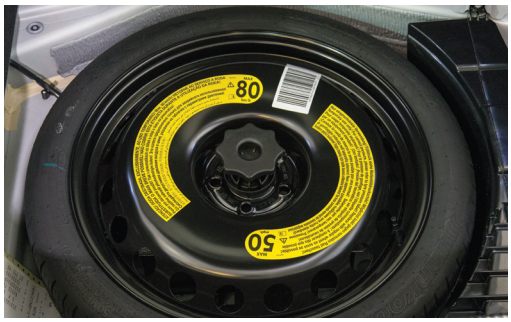

The tool kit is located under the spare tire.

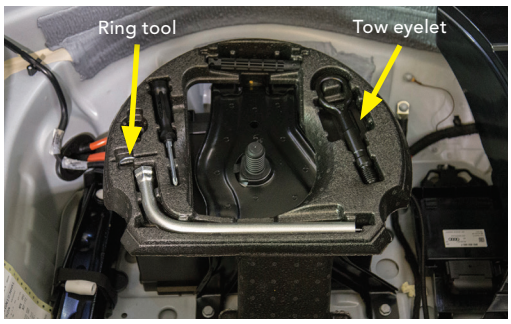

Pictured: Tool kit

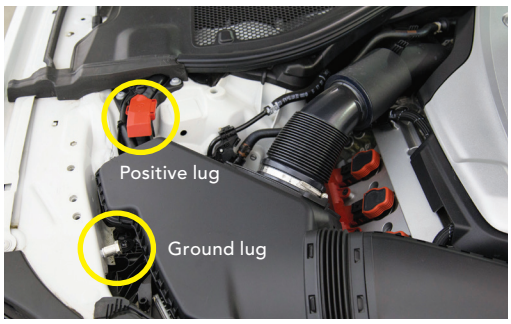

Jump start

Towing Information

FRONT: Press the bottom of the front eyelet cover to remove.

REAR: Press the top of the rear eyelet cover to remove.

2017 Audi A8/S8

Roadside and Towing Information

Roadside Information

The tool kit is located under the spare tire.

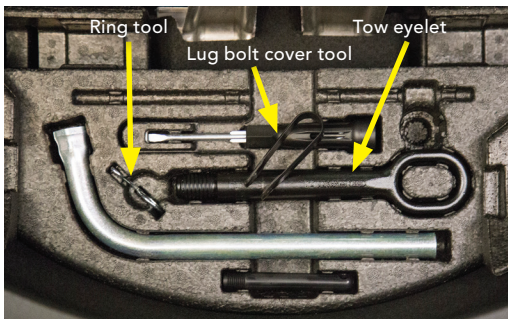

Pictured: Tool kit

Pictured: Lug bolt cover tool alternative location

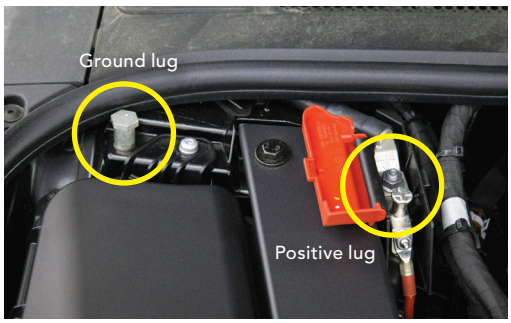

Jump start

Towing Information

FRONT: Press the top of the front eyelet cover to remove.

REAR: Press the top of the rear eyelet cover to remove.

2017 Audi Q3

Roadside and Towing Information

Roadside Information

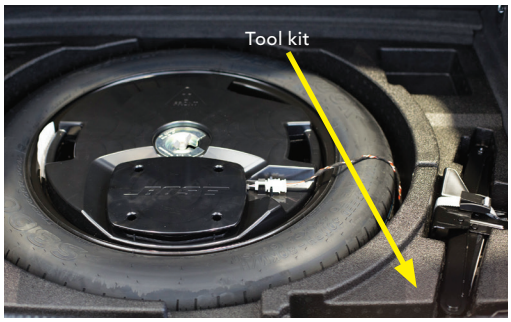

The tool kit is located under the load floor.

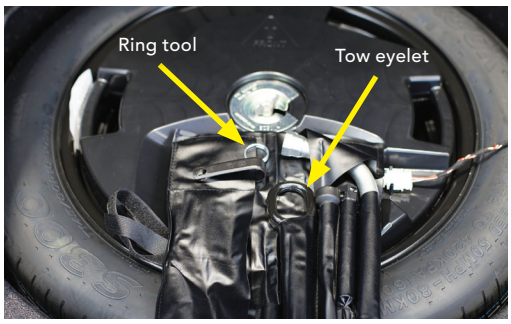

Pictured: Tool kit

Jump start

Towing Information

FRONT: Insert the ring tool in the front eyelet cover to remove.

REAR: Press the bottom of the rear eyelet cover to remove.

2017 Audi Q5/SQ5

Roadside and Towing Information

Roadside Information

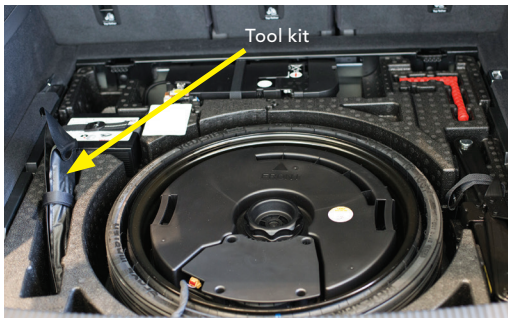

The tool kit is located under the load floor.

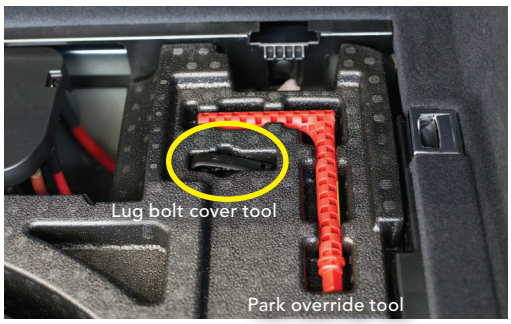

Pictured: Tool kit

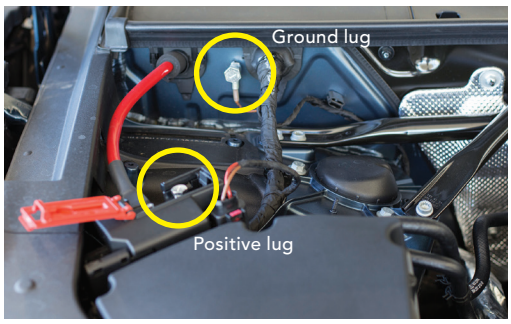

Jump start

Towing Information

FRONT: Firmly grasp the cover and pull from the right side of the bumper first.

Remove the cover and put in a safe place.

REAR: Press the right side of the rear eyelet cover to remove.

2017 Audi Q7

Roadside and Towing Information

Roadside Information

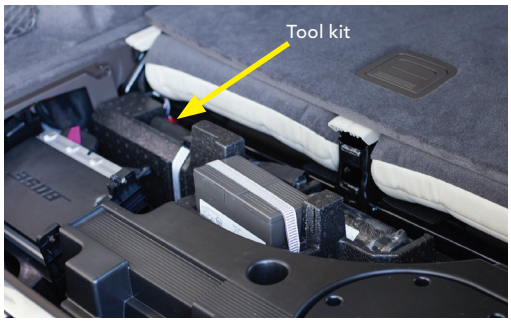

The tool kit is located under the load floor.

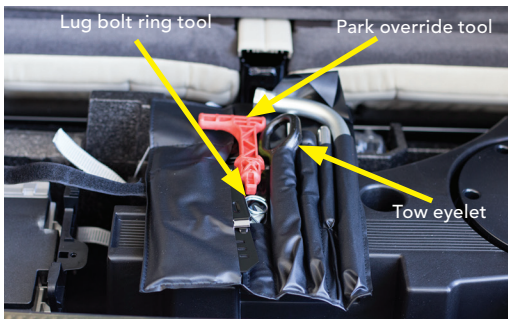

Pictured: Tool kit

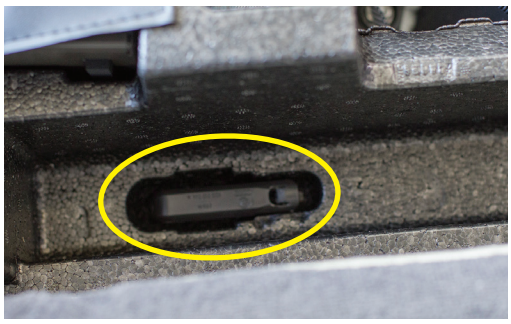

Below the tool kit is the removal tool for slide-on style lug bolt covers.

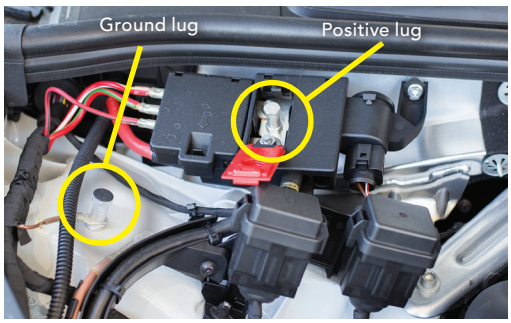

Jump start

Towing Information

FRONT: Press the bottom of the front eyelet cover to remove.

2017 Audi TT - All Variants

Roadside and Towing Information

Roadside Information

The spare tire and the tool kit are located under the load floor.

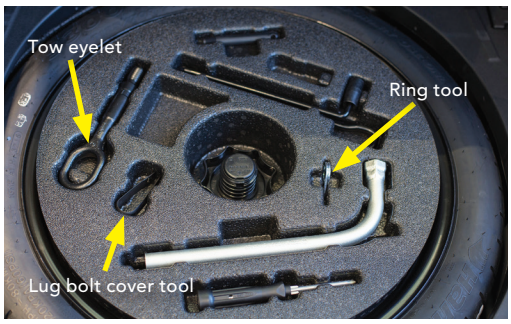

The tool kit is located in the back of the spare tire.

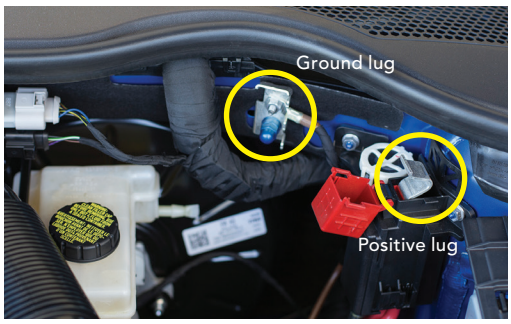

Jump start

Towing Information

FRONT: Press the top left corner of the front eyelet cover.

REAR: Press the bottom of the rear eyelet cover to remove.