


LinkWear Wireless Alert

Door Alert System

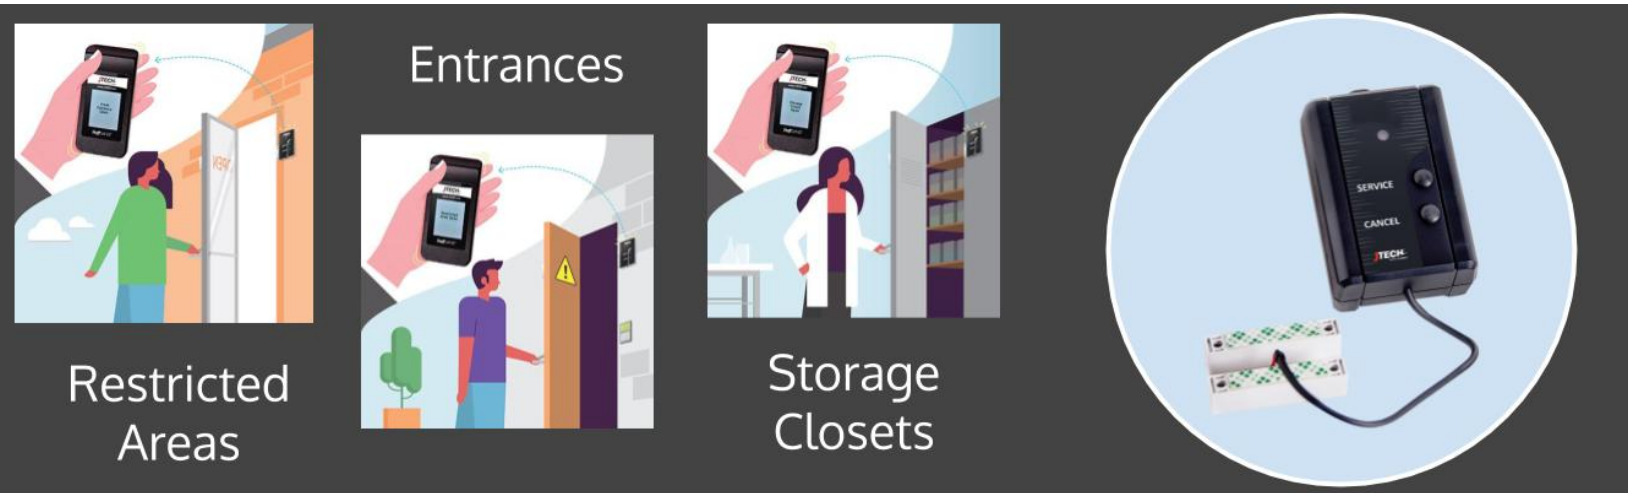

Restricted Areas

Entrances

Storage Closets

Dry Contact Alert System

Get alerted when a door opens via text or pager. No matter where you are, you can feel secure knowing that you'll be notified.

- **Entry Ways**
Get alerted when someone walks in any door
- **Storage Closets / Cabinets**
Perfect for medical facilities, schools and retail
- **Restricted Areas**
Discreet notification when someone enters a restricted room or area
- **Restrooms**
Perfect for estimating when maintenance or restocking is needed



Door Alert System
Transmitter & Pager

Additional Features

Completely Programmable

You can program the number of opens required before sending an alert.

Low Profile

Easy to install, the discreet design will not interfere with your décor.

User-Replaceable Batteries

Replace your own batteries to reduce downtime and cost.

Manager Pager Included

Comes with it's own pager or can be programmed to one of our Alpha-Numeric Pagers.

Low Battery Alert

Low battery notification provided via pager.

Flexible Installation

Can easily be modified depending on door orientation.

Call today for more information

800.321.6221
www.jtech.com



LinkWear Wireless Alert Door Alert System

Specifications

Frequency

- > Frequency Range: 450-470 MHz
- > FCC Identifier: WDC-RETTX
- > IC Identifier: 7752A-RETTX
- > Channel Spacing: 12.5 KHz

Electrical

- > Format: POCSAG
- > RF Output (Watts): 50 mWatts
- > Deviation: +/-4.5 KHz
- > Modulation Scheme: FSK

Alerts

- > Maintenance alert sent to multiple pagers
- > Escalation page sent to manager
- > Programmable maintenance alerts based on number of visits

Battery

- > AA size x 2 / 3.6V Lithium battery (4,800 mAh)
- > User replaceable
- > Est. 18-24 months
- > Low battery alert sent to pager

Smart Technology

- > Magnetic door / infrared sensor
- > Customizable visit threshold
- > Visits based on door openings

Range

- > Effective Range: Up to .25 miles
- > Unique System ID eliminates interference
- > Speed / Baud Rate: 512 / 1200

Staff Pager Options



StaffCall IQ®



Alpha-Numeric Pager



Rugged Pager

Dimensions

Restroom Attendant Transmitter

Length: 1.26 inches (3.2 cm) Width: 2.08 inches (5.28 cm)
Height: 3 inches (7.62 cm) Weight: 0.25 lbs (0.11 k)

Rugged Belt Pager Charger

Length: 4.25 inches (10.79 cm) Width: 4.25 inches (10.79 cm)
Height: 0.8 inches (2.03 cm) Weight: 0.30 lbs (0.17 k)



Call today for more information
800.321.6221

JTECH

1400 Northbrook Parkway
Suite 320
Suwanee, GA 30024, USA
www.jtech.com
Tel: (800) 321.6221



About JTECH, an HME Company

JTECH is the largest onsite paging company in the world and the leading provider of onsite messaging solutions for hospitality, healthcare, retail, church nurseries and other markets. Headquartered in Suwanee, Georgia, JTECH is a wholly-owned subsidiary of HME, Inc., an innovative technology company focused on enhancing productivity and customer service for multiple markets including restaurant and pro audio since 1971.

©2017 JTECH, an HME Company logo and product names are registered trademarks of HM Electronics, Inc. All rights reserved.

PS17-TXRR-v1