# (R)



# **FASTENING CATALOG**





# **TABLE OF CONTENTS**

CORDLESS NAILERS	7-
FRAMING NAILERS	11-1
ROOFING NAILERS	
FINISH & TRIM NAILERS	19-2
FLOORING NAILERS	25-2
SPECIALTY NAILERS & STAPLERS	29-3
PNEUMATIC STAPLERS	33-3
COMPRESSORS & COMBO KITS	37-4
MANUAL FASTENING TOOLS	
AIR ACCESSORIES & AIR HOSES	47-5
FASTENERS	53-6

**BOSTITCH FASTENING BOSTITCH FASTENING** 

#### IMPORTANT – READ CAREFULLY

You, and others working around you, can be seriously injured by fastener driving tools if you do not follow the instructions provided on the tool and in the operations manual. Used properly, these tools provide easy, safe, and efficient methods for driving nails and staples for all kinds of construction projects.

REFER to your Operations Manual, Parts List, or call BOSTITCH® Customer Service: 1-800-556-6696 if any of the terms used below are unfamiliar to you.

EYE PROTECTION which conforms to ANSI Z87.1 specifications and provides protection against flying particles both from the FRONT and SIDE should ALWAYS be worn by the operator and others in the work area when connecting to air supply, loading, operating or servicing fastener driving tools. Eve protection is required to guard against flying fasteners and debris, which could cause severe eye injury.

#### THE CONTACT TRIP, SEQUENTIAL TRIP AND SELECTABLE TRIGGER

BOSTITCH® offers three types of triggers for pneumatic tools: Contact Trip (black trigger), Seguential Trip (silver-gray trigger) and Selectable Trigger. Each trigger has specific advantages. For example, the Contact Trip is best suited for highvolume, rapid nailing or stapling where exact placement of the fastener is not important. The Sequential Trip is best suited for applications where rapid nailing is not required or where the exact placement of the fasteners is important. You should evaluate your construction project to determine which trigger type is best for you. Tools equipped with selectable trigger allow easy selection of contact or sequential trip with the turn of a dial.

#### **CONTACT TRIP**

A BOSTITCH® tool with the Contact Trip (black trigger) installed will drive a nail whenever both the trip and the trigger are depressed at the same time.

The tool can be used to rapidly drive nails by holding the trigger pulled and repeatedly bumping the trip against the work to be nailed (Bump Nailing). A nail is driven each time the trip is bumped against the work.

The Contact Trip will not prevent a nail from being accidentally driven if the trigger is held, pulled and the trip is bumped against any object or person. Never hold or carry the tool with your finger on the trigger unless driving fasteners.

The Contact Trip can also be operated by holding the tool against the work with the trip depressed and then pulling the trigger (Place Nailing). When using a Contact Trip for Place Nailing, the tool may bounce due to recoil, and if the tool is allowed to recontact the work surface while you are holding the trigger pulled, a second nail will be driven. The operator should allow the tool to recoil far enough to release the trip and avoid a second cycle. Don't push the tool down extra hard; let the tool do the work.

#### **SEQUENTIAL TRIP**

The Sequential Trip (silver-gray trigger) offers a positive safety advantage since it will not accidentally drive a nail if the tool is bumped against any surface or anybody while the operator is holding the tool with the trigger pulled.

It also allows Place Nailing without the possibility of driving a second nail on recoil as described under "Contact Trip."

The Sequential Trip gets its name from the "sequence" required to operate the tool. To drive a nail, the operator must first depress the trip against the work and then pull the trigger. To drive a second nail, the operator must lift the tool from the work, release the trigger, and then repeat the above sequence.

If further information is required, call BOSTITCH® Customer Service at 1-800-556-6696 or write to: BOSTITCH® Customer Service, 480 Myrtle Street, New Britain, Connecticut 06053.



LIMITED WARRANTY — U.S. and Canada Only

Effective December 1, 2005 BOSTITCH®, L.P. warrants to the original retail purchaser that the product purchased is free from defects in material and workmanship, and agrees to repair or replace, at BOSTITCH® option, any defective BOSTITCH® branded pneumatic stapler or nailer for a period of seven (7) years from date of purchase, (two [2] years from the date of purchase for BOSTITCH® branded cordless gas nailers and staplers, one [1] year from the date of purchase for compressors and tools used in production applications). Warranty is not transferable. Proof of purchase date required. This warranty covers only damage resulting from defects in material or workmanship; it does not cover conditions or malfunctions resulting from normal wear, neglect, abuse, accident or repairs attempted or made by other than our national repair center or authorized warranty service centers. Driver blades, bumpers, o-rings, pistons and piston rings are considered normally wearing parts. For optimal performance of your BOSTITCH® tool, always use genuine BOSTITCH® fasteners and replacement parts.

This warranty IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES AND with respect to compressors and tools used in production applications, limits to a period of one (1) year from the date of purchase all implied warranties INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. BOSTITCH® SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state and country to country.

To obtain warranty service in the U.S., return the product, together with proof of purchase, to the U.S. BOSTITCH® National Repair Center. In the U.S. you may call us at 1-800- 556-6696 or visit www.BOSTITCH.com for address information. In Canada please call us at 1-800-567-7705 or visit www.BOSTITCH.com.

ALWAYS WEAR SAFETY GOGGLES


3


**BOSTITCH FASTENING BOSTITCH FASTENING** 

BOSTITCH® manufactures over 2000 types of fasteners. Each fastener is engineered for optimal performance in BOSTITCH® tools, and for exceeding the performance expectations of our customers. Our goal is to continually increase efficiency, productivity, and quality, and to ensure building code compliance through reports ESR-2020, ESR-1539, ESR-1482, ESR-2122 and ER-120. Our team of engineers leads the industry in innovation and design. Utilizing our advanced laboratory, our team of engineers conducts environmental testing to study the effects of storm forces and other weather conditions, withdrawal testing to evaluate new coatings, penetration testing to evaluate drive characteristics, and development testing to optimize withdrawal, shear and pull-through performance.

# Selecting the Proper BOSTITCH® Nails







**Paper Collation** 




**Plastic Collation** 


**Wire Collation** 

**Adhesive Collation** 

BOSTITCH® Stick Nails are designed, engineered and manufactured in four different forms and are generally identified by collation material - plastic, wire, paper or adhesive. Adhesive collation is used on finish nails and brads for trim and fine woodwork. Finish nails and brads range in length from 3/8" to 2-1/2" with diameters ranging from 15 to 23 gauge. The plastic, wire and paper collated nails are used for general framing and crating applications. Stick nails range in length from 1-1/2" to 6-1/4" with diameters ranging from 0.113" to 0.165".

#### **Examples of BOSTITCH® Coil Nails**






**Wire Collation** 

**Plastic Collation** 

BOSTITCH® Coil Nails are made at a 15° angle, joined together with wire or plastic, and range from 3/4" to 4" in length with diameters ranging from 0.080" to 0.148". Applications typically include roofing, siding, fencing, framing and crating.



There are three types of nail shanks – smooth, ring and screw.. A smooth shank has a withdrawal capacity that is adequate for most applications. During the manufacturing of smooth shank nails, a coating is applied, which eases penetration resistance and ultimately helps improve the holding power of the fastener. However, when more holding power is necessary, a ring or screw shank should be used. A ring shank is designed for increased withdrawal strength in softwoods. The screw shank works well at improving the withdrawal capacity in hardwoods.

The metal and coating used on the shank of the nail are important when selecting the proper nail for the application. BOSTITCH® offers nails manufactured out of cold-worked carbon steel, cold-worked hardened steel, aluminum and stainless steel. Cold-worked carbon steel is most commonly used when corrosion resistance is not a concern; cold-worked hardened steel is most commonly used when attaching material to very hard substrates; and aluminum and stainless steel are most commonly used when severe corrosion resistance is needed due to the wood or environment in which the nail is installed.


Exclusive to BOSTITCH®is the THICKCOAT™ galvanization which provides a consistent, high-performance, corrosion-resistant coating. BOSTITCH®THICKCOAT™, as recognized in the exclusive code report ESR-1482, is designed to meet or exceed the performance of ASTM A153 hot dipped galvanized nails. THICKCOAT™ fasteners are available in all sizes of wire weld, coil and stick, and are specifically designed for use in ALL pressure treated lumber and exterior applications.




#### **Nail Point**

There are four basic point styles to consider for an application – diamond, blunt diamond, chisel, and blunt chisel. Proper selection is important as the nail point can cause the wood to split, rob the tool of power or affect the withdrawal capacity of the nail.







**Blunt Diamond Point** Effective at reducing wood splitting in hardwood applications




**Chisel Point** Preferred point for trim applications




**Blunt Chisel Point** Effective at reducing wood splitting in hardwood applications

## Selecting the proper BOSTITCH® Staples



All staples are joined with an adhesive coating that holds the staple together, aids the staple in penetration and keeps it from withdrawing from the wood. Light wire staples are measured in thousandths and heavy wire staples are measured by gauge. Staple gauges range from 15 to 18 and the lengths range from 1/2" to 2-1/2". Both light wire and heavy wire staples are available in steel, coated, and stainless steel, and are typically classified by the crown width. In some cases, staples are less expensive and may reduce material splitting as compared to nails.

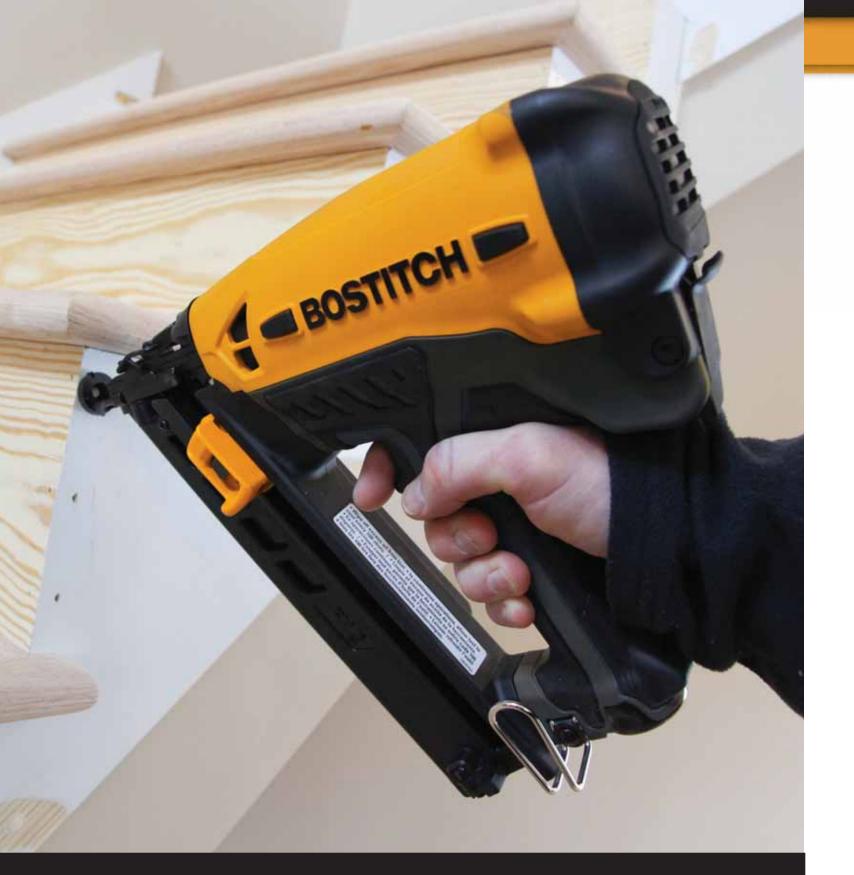

# CORDLESS NAILERS

# **CORDLESS NAILERS**

# **Cordless 15 GA Angled Finish Nailer**

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1564K	4.2 lbs.	332 in-lbs.	100	"FN" 15 GA Angled	1-1/4" - 2-1/2"
				See Pg. 58	

# **Cordless 16 GA Straight Finish Nailer**

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1664K	4.0 lbs.	309 in-lbs.	100	16 GA Straight	1" - 2-1/2"
				See Pg. 58	

# **Cordless 18 GA Straight Brad Nailer**

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- 3.6V li-ion battery charges in one hour





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GBT1850K	4.0 lbs.	185 in-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	



#### Finish Fuel Cell

- Fuel contains synthetic lubricants for optimal operation under high temperature conditions
- Yellow accented canister allow for easy identification of fuel type
- Comes in a package of four fuel cells

SKU#	COMPATABILITY
9B12062R	BOSTITCH® GFN1564K, GFN1664K, GBT1850K Paslode® 900600, 902000, 901000, Hitachi®: NT65GS, NT50GS

Paslode is a registered trademark of Illinois Tool Works, Inc. Senco is a registered trademark of Senco Products, Inc. Hitachi is a registered trademark of Hitachi, Ltd.



# Framing Fuel Cell

- Fuel contains synthetic lubricants for optimal operation under high temperature conditions
- Red accented canister allow for easy identification of fuel type
- Comes in a package of two fuel cells

SKU#	COMPATABILITY
9B12061R	BOSTITCH® GF28WW
3D12001h	Paslode® 900420, Hitachi® NR90GR, NR90GC, NR90GC2 and Senco® GT90CH, GT90FRH

Paslode is a registered trademark of Illinois Tool Works, Inc. Senco is a registered trademark of Senco Products, Inc.

# 3.6 V Lithium-Ion Battery

- Rechargeable battery for cordless finish tools: GBT1850K, GFN1664K, GFN1564K
- Ultra-fast 60 minute charge
- For use with BOSTITCH® charger 9B12071R only



SKU#	POWER	BATTERY TYPE
9B12070R	3.6 V	Li-ion

# 7.2 V Nickel-Cadmium Battery

- 7.2V nickel cadmium rechargeable battery for cordless framing tool: GF28WW
- Ultra-fast 60 minute charge
- For use with BOSTITCH® charger 9B12073R only

US Only Toll Free Customer Service Number: 1-800-556-6696

US Only Customer Service FAX Number: 1-800-842-9360



SKU#	POWER	BATTERY TYPE
9B12072R	7.2 V	Ni-Cd



- Low profile design for getting in-between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- Last nail retention magnet prevents last nail from dropping out of the nose



SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF33PT	7.6 lbs.	840 in-lbs.	92	30° Paper Collated	2" - 3-1/4"
				See Pg. 54	

# 21° Low Profile Plastic Collated Framing Nailer

- Low profile design for getting in between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- Last nail retention magnet prevents last nail from dropping out of the nose





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF21PL	7.6 lbs.	840 in-lbs.	64	21° Plastic Collated	2" - 3-1/4"
				See Pg. 56	



BOSTITCH

# 28° Low Profile Wire Weld Framing Nailer

- Low profile design for getting in between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- · Last nail retention magnet prevents last nail from dropping out of





#### Nails available in brite

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF28WW	7.6 lbs.	840 in-lbs.	92	28° Wire Collated	2" - 3-1/4"
				See Pg. 53	

# 21° Plastic Collated Framing/Metal Connector Nailer

- Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- · Lightweight magnesium design for durability
- Two nailers in one: optional quick change nose pieces (sold separately) to convert tool to either framing or metal connector applications

MCN-KIT2: Metal Connector Kit





# Nails available in brite, galvanized and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F21PL2	8.1 lbs.	1050 in-lbs.	60	21° Plastic Framing & Metal Connector	2" - 3-1/2" 1-1/2" - 2-1/2"	.113"162" .131"162"
				See Pg. 56		

# 28° Wire Weld Framing Nailer

- Notched 16" layout indicator on magazine helps achieve correct distance between studs
- · Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- Lightweight magnesium design for added durability





## Nails available in brite, galvanized and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F28WW	7.6 lbs.	1050 in-lbs.	100	28° Wire Weld	2" - 3-1/2"	.113"131"
				See Pg. 53		

# 33° Paper Tape Framing/Metal Connector Nailer

- Two nailers in one: optional quick change nose pieces (sold separately) to convert tool to either framing or metal connector applications
- · Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- Lightweight magnesium design for added durability

MCN-KIT2: Metal Connector Kit



# Nails available in brite and galvanized

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F33PT	7.9 lbs.	1050 in-lbs.	80	33° Paper Framing & Metal Connector	2" - 3-1/2" 1-1/2" - 2-1/2"	.113"162" .131"162"
				See Pg. 54		

#### 35° Metal Connector Nailer

- Exposed nail tip places fastener point directly into connector holes for a fast and precise application
- Compact design fits easily into hard to reach spaces MCN150 only 10-1/2" tall
- Lightweight design for minimal fatigue
- In-line magazine offers balance for maneuverability
- MCN250 also available with compact single stick magazine MCN250S





# Nails available in brite and galvanized

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
MCN150	4.6 lbs.	450 in-lbs.	29	35° Paper Metal Connector	1-1/2"	.131"148"
MCN250	6.0 lbs.	600 in-lbs.	53	35° Paper Metal Connector	1-1/2" & 2-1/2"	.131"162"
				MCN150 See Pg. 54	MCN250 See Pg. 54	

12

FRAMING NAILERS FRAMING NAILERS

# **15° Coil Framing Nailer**

- Lightweight magnesium design for durability
- Patented push button adjustable depth guide sets nail to desired depths quickly and conveniently
- Adjustable exhaust directs air away from the user
- Coil magazine holds up to 300 nails for high production applications

# Nails available in brite, galvanized and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N89C-1	8.0 lbs.	1050 in-lbs.	225 - 300	15° Coil Framing	2" - 3-1/2"	.099"148"
				N89C-1 See Pg. 55	N89C-HQ See Pg. 55	

# **15° Coil Framing Nailer**

- Lightweight aluminum design for durability
- Heavy-duty, quick-open canister designed to survive falls
- Aggressive toe-nailing teeth grip lumber for slip-free nailing
- $\bullet$  Coil magazine holds up to 300 nails for high production applications

# Nails available in brite, galvanized and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N80CB-1	8.4 lbs.	880 in-lbs.	225 - 300	15° Coil Framing	1-1/2" - 3-1/4"	.099"148"
				See Pg. 55		



# 15° Coil Sheathing/Siding Nailer

- Perfect for high-volume nailing of wall and roof sheathing
- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Lightweight aluminum design
- Drives 15° wire weld collated and plastic inserted nails with shank diameters of .090" .131"



# Nails available in brite, galvanized and stainless

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N75C-1	5.2 lbs.	630 in-lbs.	225 - 300	15° Coil Framing & Plastic Inserted Siding	1-1/2" - 3"	.090" -131"
				See Pg. 55		

# 21° Plastic Collated Heavy-Duty Timber Framing Nailer

- Drives plastic collated framing nails for timber framing and crating
- Tool-free adjustable exhaust to direct air away from users
- Smooth trip design for fast cycling
- Secondary handle for ergonomics and control
- Built-in hanging hook for high-production use
- No nail lockout to prevent dry fires and extend tool life





#### Nails available in brite

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
BRT130	13.75 lbs.	1800 in-lbs.	50	21° Plastic Framing	4" - 5-1/8"	.131"165"
				See Pg. 56		



# ROOFING NAILERS

# **ROOFING NAILERS**

# 15° Coil Roofing Nailer

- · Zero nail lockout feature eliminates dry-firing and indicates when to reload the magazine
- Nosepiece features carbide inserts for long-life performance
- Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- Quick-set adjustable depth guide sets nails to desired depths quickly and conveniently
- Patented, single-action, side-load canister for fast, one-step nail

**POWER** 

410 in-lbs.

120

Adjustable shingle guide for quick shingle spacing



WEIGHT

4.9 lbs.



# 18 GA Wide Crown Roofing Stapler

• Jam-free magazine

SKU#

RN46-1

- Power control valve adjusts power by 30%
- Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- Nosepiece features carbide inserts for long-life performance
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable shingle guide for quick shingle spacing





### Staples available in brite, galvanized and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
438S2R-1	4.7 lbs.	230 in-lbs.	160	1" Crown Staple	1/2" - 1-1/2"	16 Ga
				See Pg. 57		

**17** 



# FINISH & TRIM NAILERS

# **FINISH & TRIM NAILERS**

# **Cordless 15 GA Angled Finish Nailer**

- · Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- · Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1564K	4.2 lbs.	332 in-lbs.	100	"FN" 15 GA Angled	1-1/4" - 2-1/2"
				See Pg. 58	

# **Cordless 16 GA Straight Finish Nailer**

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- · Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour



SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1664K	4.0 lbs.	309 in-lbs.	100	16 GA Straight	1" - 2-1/2"
				See Pg. 58	

# **Cordless 18 GA Straight Brad Nailer**

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- · Belt hook allows user to hang tool when not in use
- 3.6V li-ion battery charges in one hour





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GBT1850K	4.0 lbs.	185 in-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	

**FINISH & TRIM NAILERS FINISH & TRIM NAILERS** 

## 15 GA "DA" Style Angled Finish Nailer Kit

- LED work-light for working in closets and dark spaces
- Rear exhaust to direct air away from the user
- Integrated air blower allows user to clear away debris from work surface
- Adjustable trigger with safety lock-out allows the user to choose between single or multiple fastener drive mode
- 16" on-center gauge flips out for quick and easy installation of baseboard
- Other features include: Oil-free operation, rear trip design for clear line-of-sight and dial-a-depth adjustment for precise fastener placement
- Kit includes: tool, carry case, fasteners, 2 standard no-mar tips, 4 profile no-mar tips, hose connection, and steel belt hook
- Drives 15 GA "DA" style angled finish nails



	, ,				
SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
DA1564K	4.15 lbs.	380 in-lbs.	100	15GA "DA" Style Angled Finish Nails	1-1/4" - 2-1/2"
				See Pg. 58	

## 15 GA "FN" Style Angled Finish Nailer Kit

- LED work-light for working in closets and dark spaces
- Rear exhaust to direct air away from the user
- Integrated air blower allows user to clear away debris from work surface
- Adjustable trigger with safety lock-out allows the user to choose between single or multiple fastener drive mode
- 16" on-center gauge flips out for quick and easy installation of baseboard
- Other features include: Oil-free operation, rear trip design for clear line-of-sight and dial-a-depth adjustment for precise fastener placement
- · Kit includes: tool, carry case, fasteners, 2 standard no-mar tips, 4 profile no-mar tips, hose connection, and steel belt
- Drives 15 GA "FN" style angled finish nails



SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
N62FNK-2	4.15 lbs.	375 in-lbs.	130	15GA "FN" Style Angled Finish Nails	1-1/4" - 2-1/2"
				See Pg. 58	

# **16 GA Straight Finish Nailer Kit**

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Dial-A-Depth<sup>™</sup> control for precise countersinking
- Quick release nosepiece for fast and easy jam clearing
- · Rear trip design for precise fastener placement
- · Rear exhaust directs air away from the user
- Selectable trigger system converts from sequential to contact operation
- Low nail lockout prevents dry firing
- Kit includes: finish nailer, 1/4" air fitting, fasteners 4 Profile tips, carrying case & belt hook





#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
FN1664K	3.9 lbs.	285 in-lbs.	100	16 GA Straight	1-1/4" - 2-1/2"
				See Pg. 58	

# **16 GA Straight Finish Nailer Kit**

- · Adjustable depth guide sets nails to desired depths quickly and conveniently
- Quick release nose door for fast jam clearing
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- Kit includes: finish nailer, fasteners, carrying case







#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-1664FN	4.0 lbs.	300 in-lbs.	100	16 GA Straight	1-1/4" - 2-1/2"
				See Pg. 58	

20

### **18 GA Brad Nailer Kit**

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Selectable trigger system converts from sequential to contact operation
- Rear exhaust directs air away from the user
- Low nail lockout prevents dry firing
- Kit includes: brad nailer, 1/4" air fitting, fasteners, carrying case & belt hook





#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
BT1855K	2.7 lbs.	160 in-lbs.	100	18 GA Brads	5/8" - 2-1/8"
				See Pg. 59	

#### 18 GA Brad Nailer Kit

- Adjustable depth guide sets nails to desired depths guickly and conveniently
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- No-mar tip protects work surface
- Kit includes: brad nailer, fasteners, 1/4" air fitting, & carrying case





#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	POWER MAGAZINE CAPACITY		FASTENER LENGTH
SB-1850BN	2.7 lbs.	145 in-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	

# 18 GA 2in1 Brad Nailer/Finish Stapler Kit

- Drives both 18-gauge brads and narrow crown finish staples for versatility
- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- Kit includes: nailer, 1/4" air fitting, fasteners, carrying case, & extra no-mar tip





### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	
SB-2IN1	2.6 lbs.	135 in-lbs.	100	18 GA Brads	5/8" - 1-5/8"	See Pg. 59
SD-ZIIVI	2.0 105.	199 111-108.		18 GA "SX" Staples	1/2" - 1-1/2"	See Pg. 59

# 23 GA Headless Pin Nailer Kit

- Adjustable high/low power control sets pin depth without changing compressor setting
- Low profile nosepiece tapers down to contact point for clear line-of-sight
- Kit includes: nailer, 1/4" air fitting, fasteners, carrying case, & belt hook





#### Nails available in coated

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
HP118K	2.3 lbs.	60 in-lbs.	200	23 GA Pins	1/2" - 1-3/16"
				See Pg. 60	

# **18 GA Finish Stapler Kit**

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- · Selectable trigger system converts from sequential to contact operation
- Rear exhaust directs air away from the user
- Low nail lockout prevents dry firing
- Kit includes: finish stapler, 1/4" air fitting, fasteners, carrying case, & belt hook





#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SX1838K	3.0 lbs.	160 in-lbs.	100	18 GA "SX" Staples	1/2" - 1-1/2"
				See Pg. 59	

# **18 GA Finish Stapler Kit**


- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- · Bottom load magazine for fast loading and easy jam clearing
- No-mar tip protects work surface
- Kit includes: finish stapler, 1/4" air fitting, fasteners, & carrying case





#### Nails available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-150SX	2.6 lbs.	135 in-lbs.	100	18 GA "SX" Staples	1/2" - 1-1/2"
				See Pg. 59	

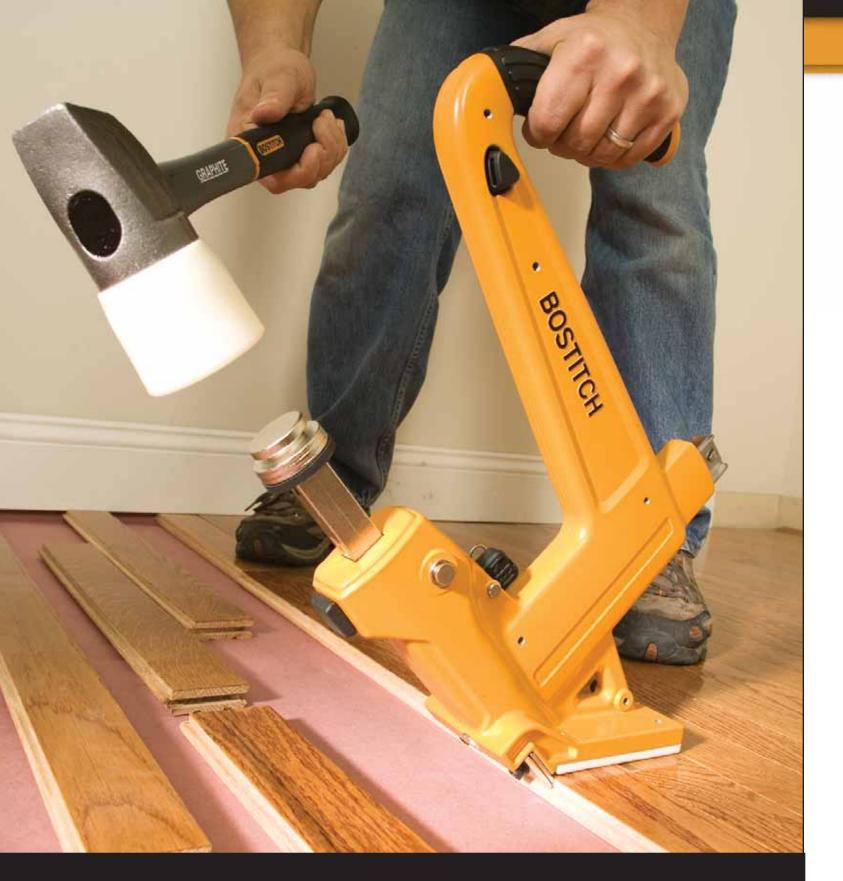

# FLOORING NAILERS

# **FLOORING NAILERS**

# 15.5 GA Hardwood Flooring Stapler Kit

- High-speed mallet actuated pneumatic operation increases productivity over manual methods
- Extra-wide composite base plate for stability (1/2", 5/8" and 3/4" base plates included)
- Long-reach handle for vcomfort and control (short handle optional)
- Kit includes: stapler, graphite mallet, pre-finished flooring adapter foot

# Staples available in coated and stainless steel





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MIIIFS	11.2 lbs.	420 in-lbs.	92	15.5 GA BCS Flooring Staple	1-1/2" - 2"
				See Pg. 60	

# **16 GA Hardwood Flooring Cleat Nailer Kit**

- High-speed mallet actuated pneumatic operation increases productivity over manual methods
- Extra-wide composite base plate for stability (1/2", 5/8" and 3/4" base plates included)
- Long-reach handle for comfort and control (short handle optional)
- Kit includes: nailer, graphite mallet, pre-finished flooring adapter foot

#### Nails available in coated



SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
ИШFN	11.2 lbs.	420 in-lbs.	110	16 GA L-Shaped Flooring Cleat	1-1/2" - 2"
				See Pg. 60	

# **16 GA Manual Hardwood Flooring Cleat Nailer Kit**

- Selectable drive mode to choose between single or multi-blow options
- Graphite mallet with ergonomic comfort grip
- Installs 1/2", 5/8" and 3/4" flooring
- Rubber bumpers protect pre-finished floors against marring
- Kit includes: nailer, graphite mallet, flooring adapters (for 1/2" & 5/8" flooring), carrying case & hex wrenches





### Nails available in coated

SKU#	WEIGHT	<b>MAGAZINE CAPACITY</b>	FASTENER TYPE	FASTENER LENGTH
MFN-201	8.6 lbs.	120	16 GA L-Shaped Flooring Cleat	1-1/2" - 2"
			See Pg. 60	

**FLOORING NAILERS** 

# **FLOORING NAILERS**

# **18 GA Engineered Flooring Stapler Kit**

- Adjustable knobs allow tool-free adjustment from 5/16" 7/16" for solid hardwood and 1/2" - 5/8" for engineered hardwood and engineered bamboo
- High visibility tongue engagement for faster installation
- Non-marring profile tips to prevent floor scratches
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Rear exhaust directs air away from the user



## Staples available in coated and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
EHF1838K	3.47 lbs.	160 in-lbs.	100	18 GA "SX" Staples	1" - 1-1/2"
				See Pg. 59	

# **20 GA Engineered Flooring Stapler Kit**

- Adjustable knobs allow tool-free adjustment from 1/4" to 1/2" engineered flooring
- High visibility tongue engagement for faster installation
- Non-marring profile tips to prevent floor scratches
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Rear exhaust directs air away from the user



#### Staples available in coated

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LHF2025K	2.9 lbs.	122 in-lbs.	125	20 GA 97 Series Staple	1"
				See Pg. 60	

# **Graphite Hardwood Flooring Mallets**

- · Beveled face to set board ends and protect wear layer
- Soft replaceable face to protect flooring and tool
- Jacketed graphite handle adds strength and durability while providing the feel of wood
- Flared comfort fit handle for firm grip

Traised commercine manages for mining sup		
SKU #	WEIGHT	LENGTH
HFM-3	45 oz.	14.8"
HFM-4	59 oz.	16.1"
HFMF-SW	Replacemen	t Mallet Face

# 2-in-1 Hardwood Flooring Jack

- Tool-free rotating knob allows adjustment between application modes
- Non-marring base pad designed for pre-finished flooring
- Angled handle for easy release close to walls
- · Over-molded handle designed for comfort and control
- · Pre-drilled holes for fast attachment to sub-flooring

SKU#	WEIGHT	CLAMPING POWER
MIII-JACK	7.65 lbs.	Up to 2,000 lbs.

# **Flooring Cleat Nailer Conversion Kit**

• Includes kit to convert the MIIIFS Flooring Stapler to an MIIIFN Flooring Cleat Nailer

US Only Toll Free Customer Service Number: 1-800-556-6696

SKU#	WEIGHT	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MIIIFN-KIT	4.0 lbs.	110	L-Shaped Flooring Cleat	1-1/2" - 2"
			See Pg. 60	



# SPECIALTY NAILERS & STAPLERS

# **SPECIALTY NAILERS & STAPLERS**

# **15° Coil Siding Nailer**

- · Drives wire weld and plastic inserted coil nails
- · Adjustable depth guide sets nails to desired depths quickly and conveniently
- Lightweight aluminum design for durability
- Soft rubber foot prevents damage to softer woods
- Tool-free adjustable exhaust conveniently directs exhaust away from the user



SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N66C-1	4.7 lbs.	500 in-lbs.	300	15° Coil Siding & Plastic Inserted Siding	1-1/4" - 2-1/2"	.080"092"
				See Pgs. 61, 62		

# 18 GA Cap Stapler

- Designed to be the preferred method of securing felt, house wrap and thin foam
- Adjustable depth of drive sets staples to desired depths quickly & conveniently
- Selectable trigger operation converts from sequential to contact operation
- Includes internal air filter for maximum reliability
- 1" diameter caps offer holding power for productivity
- The BOSTITCH® Cap method can work faster than nailing by hand





#### Staples available in coated

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE		FASTENER LENGTH	FASTENER GAUGE
SL1838BC	2016	s. 170 in-lbs.	160	5/16" Crown Staples	See Pg. 61	1" - 1-1/2"	18 Ga
SLIOSODU	3.9 lbs.		100	BOSTITCH® Caps	See Pg. 62		

# 15° BOSTITCH® Cap Nailer

- Tool-free depth of drive adjustment sets nails to desired depths quickly and conveniently
- · Lightweight aluminum design for added durability
- Quick-load magazine feature provides fast and easy loading of caps and nails
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- 1" diameter caps offer superior hold power and increased productivity
- The BOSTITCH® Cap method is faster than nailing by hand



# Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N66BC-1	5.8 lbs.	500 in-lbs.	300	Coil Framing & Siding and BOSTITCH® Caps	1-1/4" -2-1/2"	.080"092"
				See Pgs. 61, 62		

## Mini Impact Nailer

- Rubber grip designed to insulate and reduce vibration
- Weighs only 1 pound
- 360° Swivel exhaust fitting for maximum accessibility
- Front exhaust directs air away from user's palm

The same of the sa						
SKU#	WEIGHT	FASTENER TYPE				
PN50	1.0 lbs.	Bulk Finish, Framing & Timber Nails				

# 15° Coil Sheathing-to-Steel Nailer

- Designed for fastening sheathing to light gauge steel studs
- Sheathing types gypsum, steel, plywood, osb
- Optimized pneumatic engine for high production and power to drive through steel
- Fastener centering jaws for drive quality in all sheathing products
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- One-piece nail canister door for faster loading
- · Driving guidance to preserve sheathing





SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
SF150C	6.8 lbs.	430 in-lbs.	200	15° Coil	1" - 1-1/2"	.100"
				See Pg. 62		

# **Impact Nailer Kit**

- Ideal for driving common bulk nails into confined areas or nailing metal connectors and joist hangers
- Magnetic nose with recessed nail slot holds nails stable for accurate fastener placement
- Hardened steel nose for durability
- Kit includes: impact nailer, standard nose, finish nail nose, large bore nose, leather comfort glove, nose wrench, hex wrench, tool lubricant and spare o-rings



with other in the second		int and opens of rings
SKU#	WEIGHT	FASTENER TYPE
PN100K	2.9 lbs.	Bulk Finish, Framing & Timber Nails

#### **Concrete Nailer**

- · Lightweight aluminum design for added durability
- High-speed pneumatic power increases productivity over other fastening methods
- · Makes fastening of wood furring strips to concrete fast and easy
- High-capacity magazine reduces reload time

#### Nails available in hardened & stiff

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
MIII812CNCT	7.1 lbs.	420 in-lbs.	66	T-Nail	9/16" - 2-1/4"	.097"
				See Pg. 62		



<sup>\*</sup>Maximum initial battery voltage (measured without a workload) is 12 volts. Nominal voltage is 10.8



# PNEUMATIC STAPLERS

# PNEUMATIC STAPLERS

# **Wide Crown Stapler**

- AntiJam<sup>™</sup> magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas
- Nosepiece features carbide inserts for long-life performance





### Staples available in brite, galvanized, and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
438S2-1	4.5 lbs.	230 in-lbs.	160	1" Crown Staple	1/2" - 1-1/2"	16
				See Pg. 57		

# Wide Crown Lathing Stapler

- AntiJam<sup>™</sup> magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas



# Staples available in brite, galvanized, and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
450S2-1	4.5 lbs.	230 in-lbs.	160	1" Crown Staple	1/2" - 2"	16
				See Pg. 57		

# **Construction Stapler**

- AntiJam<sup>™</sup> magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas





#### Staples available in brite, galvanized, and stainless steel

	SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
	438\$4-1	4.0 lbs.	230 in-lbs.	160	1/2" Crown Staple	3/4" - 1-1/2"	16
1					See Pg. 63		

PNEUMATIC STAPLERS

PNEUMATIC STAPLERS

# 1/2" Construction Stapler

- AntiJam<sup>™</sup> magazine to minimize downtime
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable exhaust conveniently directs exhaust away from user
- Adjustable depth guide sets staples to desired depths

# 16 GA MEDIUM CROWN STAPLE

#### Staples available in brite, galvanized, and stainless steel

SKU#	WEIGHT	POWER	MAGAZINE Capacity	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
650S4-1	4.5 lbs.	340 in-lbs.	160	1/2" Crown Staple	1" - 2"	16
				See Pg. 63		

# 7/16" Construction Stapler

- AntiJam<sup>™</sup> magazine to minimize downtime
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable exhaust conveniently directs exhaust away from user
- Adjustable depth guide sets staples to desired depths



#### Staples available in brite, and galvanized

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
650S5-1	4.5 lbs.	390 in-lbs.	160	7/16" Crown Staple	1" - 2"	16
				See Pg. 63		

# 7/16" Construction Stapler

- · Lightweight at just 4.2-Pound
- Tool-free jam clearance reduces downtime
- Depth of drive adjustment to control fastener depth
- · Compatible with optional adaptor for vinyl siding





#### Staples available in brite, and galvanized

SKU#	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
651S5	4.2 lbs.	390 in-lbs.	160	7/16" Crown Staple	1" - 2"	16
				See Pg. 63		

# Heavy-duty 3/8" Crown Stapler

- Combination of pneumatic tacker and brad nailer uses both T50 staples and brad nails for wide range of applications
- Staples lengths :1/4", 5/16", 3/8", 1/2" and 9/16" and Brads 1/2" to 5/8"
- Dual trigger design incorporates safety and comfort for all day use
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains on material
- Bottom loading for quick reloads
- Low fastener indicator to quickly assess when it's time to reload
- Kit includes: Stapler/Brad nailer, Staple Samples







**BOSTITCH** 

SKU#	WEIGHT	MAGAZINE CAPACITY	FASTENER SERIES	FASTENER RANGE	FASTENER TYPE	FASTENER GAUGE
DTED74075	2 2 lb c	0.4	BTA700 Series	1/4" - 9/16"	3/8" Crown Staple	18
BTFP71875	2.3 lbs.	84	SWKBN Series	1/2" - 5/8"	Brad	18
					See Pgs. 59,63	



# COMPRESSORS & COMBO KITS

# **COMPRESSORS & COMBO KITS**

# 1.2 Gallon, 150 Max PSI, Oil-Free, High-Output Trim Compressor

- High-output oil-free pump delivers 2.8 SCFM @ 90 PSI and 150 max PSI operating pressure for multiple finish tool operation
- 1.5 max HP (Running) motor draws 12 amps for easy start up without tripping circuit breakers
- 1.2 gallon compact design weighs 23.5 lbs. for easy portability
- Integrated control panel with roll cage protects gauges from jobsite damage
- LED ON/OFF switch lets you know when the compressor is on to eliminate low-pressure misfires
- On-board tool and hose storage
- Convenient storage pocket for hand tools, fasteners and fittings
- Integrated cord wrap for easy storage
- Non-marring rubber feet







RECOMMENDE	ED TOOL CAPACITY
APPLICATION	NUMBER OF TOOLS
FINISH	田田

SKU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
CAP1512-0F	23.5 lbs.	1.2 Gallons	2.8 SCFM	150 PSI	1.5 HP (Running)

## 2.5-Gallon, 150 Max PSI, 2-Man Trim Compressor

- 2.0 SCFM\* delivered @ 90 PSI pump, 2.5 gallon tank and 150 max PSI enables many nails to be fired with quick recovery
- Durable oil-free pump provides extended maintenance-free operation
- Low 82 dBA\*\* allows for guiet operation
- Roll cage and control panel provide protection to key compressor components
- BOSTITCH® high efficiency/low amp motor for easy start up in cold weather or extension cord application [12GA 50 ft. (15.2 m) or less]
- Lightweight (32 lbs), thin (13") and compact design is easy to carry and store
- · Ball valve drain allows for quick and thorough tank draining
- Two quick couplers to easily support 2 nailers
- BOSTITCH® high flow regulator and couplers to maximize nailer performance





Can be run in either vertical (higher pick-up) or horizontal position (Low CG)

RECOMMENDE	EDTOOL CAPACITY
APPLICATION	NUMBER OF TOOLS
FRAMING	
ROOFING	H
FINISH	
	APPLICATION FRAMING ROOFING

S	KU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTF	P01012	32 lbs.	2.5 Gallons	2.0 SCFM	150 PSI	.8 HP (Running)

<sup>\*</sup>tested per ISO1217

<sup>\*\*</sup>tested per ISO3744

## 6-Gallon, 150 Max PSI, Oil-Free Pancake Compressor

- 150 max PSI 6.0-gallon tank (22.7 L) and 2.6 SCFM\* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m)
- 80 dBA\*\* operational noise level for a quiet work environment
- 32 lb weight makes unit easy to carry and store
- BOSTITCH® high flow regulator and couplers to maximize air tool performance
- Two universal couplers to easily support two users
- Controls are inset in shroud to provide protection
- Console cover is removable to allow easy repair of controls
- Convenient cord wrap for easy storage
- Ball drain valve allows for quick and thorough tank draining



RECOMMENDE	EDTOOL CAPACITY
APPLICATION	NUMBER OF TOOLS
FRAMING	
ROOFING	H
FINISH	四四四

SKU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02011	32 lbs.	6 Gallons	2.6 SCFM	150 PSI	.8 HP (Running)

# 4 Gallon, 135 Max PSI, Oil-Lube Stack Tank Compressor

- Oil-lubricated pump delivers 4.0 SCFM @ 90 PSI and 135 max PSI operating pressure for improved tool performance
- 1.5 HP (Running) motor draws only 13.5 amps for easy start up without tripping circuit breakers
- 4-gallon reserve tank for multi-tool use
- Roll cage style handle protects components from jobsite damage
- Cold start valve for easy start up in cold weather climates
- Oil level site glass with cast in fill and drain funnels for added convenience



RECOMMENDED TOOL CAPACITY					
APPLICATION	NUMBER OF TOOLS				
FRAMING	<b></b>				
ROOFING					
FINISH					

SKU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
CAP2040ST-OL	58 lbs.	4 Gallons	4.0 SCFM	135 PSI	1.5 HP (Running)

\*tested per ISO1217

38

# 6-Gallon, 135 Max PSI, Horizontal Compressor

- 135 max PSI 6.0 gallon tank (22.7 L) and 3.8 SCFM\* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Durable oil lube pump provides extended life
- Low 82 dBA\*\* for guiet operation
- Pull handle and wheels allow easy movement around the
- Ball valve drain allows for quick tank draining
- High-flow regulator for performance

SKU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02006	59 lbs.	6 Gallons	3.8 SCFM	135 PSI	1.1 HP (Running)

# 26-Gallon, 150 Max PSI, Oil-Free, Vertical Compressor

- 4.1 SCFM\* delivered @ 90 PSI pump, 26 gallon tank and 150 MAX PSI enables all household and most professional applications
- Long life oil free pump for ease of operation and no oil
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [12GA 50 ft. (15.2 m) or
- Welded pull handle and large 10" wheels allow easy movement around the home or pro shop
- Vertical tank configuration takes up less space
- Pull handle serves as cord wrap
- Ball valve drain allows for quick and thorough tank draining



RECO	RECOMMENDED TOOL CAPACITY						
APPLI	CATION	NUME	ER OF TOO	LS			
FRA	MING		سط س	سط			
ROC	FING						
FII	NISH	E	I E				

RECOMMENDED TOOL CAPACITY

ROOFING

FINISH

ستا ستا

4 4

SKU#	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02028	125 lbs.	26 Gallons	4.1 SCFM	150 PSI	1.6 HP (Running)

<sup>\*</sup>tested per ISO1217

<sup>\*\*</sup>tested per ISO3744

<sup>\*\*</sup>tested per ISO3744

# **COMPRESSORS & COMBO KITS**

### **3-Tool/Compressor Combo Pack**

#### BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM\* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA\*\* operational noise level for a quiet work environment
- SB-1664FN 16 GA 2-1/2" Straight Finish Nailer
- SB-1850BN 18 GA 2" Brad Nailer
- BTFP71875 Heavy-duty 3/8" Crown Stapler

#### Includes:

• Compressor, 18 GA 2" brad nailer, 3/8" crown stapler, 16 GA 2-1/2" straight finish nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners

SKU #	TOOLS	COMPRESSOR	TANK SIZE	WEIGHT	MAX HORSE POWER
BTFP72646	SB-1664FN, SB-1850BN, BTFP71875	BTFP02011	6 Gallons	32 Lbs.	.8 HP (Running)
		See Pg. 38			


# 2-Tool/Compressor Combo Pack

#### BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM\* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA\*\* operational noise level for a quiet work environment
- SB-1664FN 16 GA 2-1/2" Straight Finish Nailer
- SB-1850BN 18 GA 2" Brad Nailer

#### Includes:

• Compressor, 18 GA 2" brad nailer, 16 GA 2-1/2" straight finish nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners



<sup>\*</sup>tested per ISO1217

















#### BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM\* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA\*\* operational noise level for a quiet work environment
- SB-1850BN 18 GA 2" Brad Nailer

#### Includes:

• Compressor, 18 GA 2" brad nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners



SKU#	TOOLS	COMPRESSOR	TANK SIZE	WEIGHT	MAX HORSE POWER
BTFP72665	SB-1850BN	BTFP02011	6 Gallons	32 Lbs.	.8 HP (Running)
		See Pg. 38			

<sup>\*</sup>tested per ISO1217

<sup>\*\*</sup>tested per ISO3744

<sup>\*\*</sup>tested per ISO3744



# MANUAL FASTENING

# **MANUAL FASTENING TOOLS**

# **PowerSlam**<sup>™</sup> **PowerCrown**<sup>™</sup> **Hammer Tacker**

- Long-reach knuckle saver handle with comfortable non-slip grip
- High-capacity quick-load magazine holds up to two full sticks of staples, minimizing reloading
- Die-cast frame and through hardened steel components for durability
- AntiJam<sup>™</sup> design for maximum productivity



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
PC2K	2.25 lbs.	168	STCR5019	1/4" -3/8"
			See Pg. 64	

## **PowerCrown™ Hammer Tacker with Holster**

- $\bullet$  Die-cast frame and through hardened steel components for durability
- Quick load magazine
- Tool-free jam clearing



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
H30-8D6	2.25 lbs.	84	STCR5019	1/4" - 3/8"
			See Pg. 64	

# **PowerCrown**<sup>™</sup> Hammer Tacker

- Die-cast frame and through hardened steel components for durability
- Quick load magazine
- Tool-free jam clearing



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	REF. PAGE	FASTENER LENGTH
H30-8	1.8 lbs.	84	STCR5019	See Pg. 64	1/4" - 3/8"
H30-6	1.7 lbs	84	STCR2619	See Pg. 64	1/4" - 3/8"

# **Heavy-duty Tackers**

- Breathable AntiJam™ magazine
- Patented easy-squeeze mechanism
- Lightweight die-cast aluminum design
- Steel handle with overmolded rubber grip for comfort
- Convenient bottom loading for quick and easy reloading
- Nickel chrome plated steel magazine and core provides a smooth, durable sliding surface for staples





SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE	CLINCH TYPE
T6-8	1.9 lbs.	84	STCR5019	1/4" - 3/8"	See Pg. 64	Straight
T6-80C2	1.8 lbs.	84	STCR5019	1/4" - 3/8"	See Pg. 64	Outward
T6-60C2	1.8 lbs.	84	STCR2619	1/2"	See Pg. 64	Outward

# **PowerCrown<sup>™</sup> Stapling Plier**

- Case-hardened steel components for durability
- Ergonomic design and patented easy squeeze bearing system for ease-of-use
- Quick-load magazine



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P6C-8	1 lbs.	84	STCR5019 Staples	1/4" -3/8"
			See Pg. 64	

# PowerCrown™ Light Wire Stapling Plier

- Case-hardened steel components for durability
- Ergonomic design and patented easy squeeze bearing system for ease-of-use
- Ouick-load magazine



Quiok iou	a magazino		PowerCrown™	
SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P6C-6	1 lbs.	84	STCR2619 Staples	1/4" -3/8"
			See Pa. 64	

# **Heavy-duty Light Wire Stapling Plier**

- Case-hardened steel components for durability
- Ergonomic design for ease-of-use
- AntiJam<sup>™</sup> design for maximum productivity
- Quick-load magazine



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P3-IND	0.5 lbs.	208	SP191/4 Staple	1/4" -3/8"
			See Pg. 64	

# **Collated Ring Plier**

- Case-hardened steel components for durability
- Easy one-hand operation
- Automatic feed system for ease-of-use and productivity



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER GAUGE
P7	0.8 lbs.	50	C-Rings	16 Ga
			See Pg. 64	

# **BOSTITCH®** Heavy Duty Staple Gun

- · Heavy Duty with convenient handle lock for storage
- Chrome plated steel construction is durable and weather resistant
- Bottom-load magazine saves reload time and prevents loss of pusher





SK	(U#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
BT11	0	1.67 lbs.	84	BTA700 or Arrow® T50 HD Staples	1/4" — 9/16"	See Pg. 63

# **BOSTITCH® 2-in-1 Heavy Duty Staple/Brad Gun**

- Aircraft grade aluminum housing is lightweight and durable
- Easy-squeeze handle reduces hand fatigue
- · Bottom-load magazine saves reload time and prevents loss of pusher
- High/Low power switch for added versatility







SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
DT1COUL	1.00 lb -	84	BTA700 or Arrow® T50 HD Staples	1/4" — 9/16"	See Pg. 63
<b>BT160HL</b> 1.36 lbs.	1.30 IDS.		18 GA. Brads	1/2" — 5/8"	See Pg. 63

# **BOSTITCH® 2-in-1 Heavy Duty Cable Tacker**

- Ideal for stapling low voltage wires such as telecom, alarm systems, and bell wire
- Built-in guide prevents damage to wires
- Aircraft grade aluminum housing is lightweight and durable
- Bottom-load magazine saves reload time and prevents loss of pusher
- · High/Low power switch for added versatility



SKU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
DCT10V 1.00 lb c		0.4	STANLEY CT100 Series Round Crown Cable Staples	3/8" — 9/16"
<b>BCT10X</b> 1.36 lb	1.30 105.	lbs. 84	STANLEY CT300 Series Flat Crown Cable Staples	3/8" — 1/2"

## **BOSTITCH® Manual Hammer Tacker**

- Durable heavy duty steel construction
- Comfortable rubber handle adds grip and reduces arm fatigue
- Uses Heavy Duty (BTA700 or T50) staples 1/4", 5/16" and 3/8"





Sł	KU#	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
ВНТ	<b>[150</b> ]	2.07 lbs.	168	BTA700 or Arrow® T50 HD Staples	1/4" — 3/8"	See Pg. 63

# **BOSTITCH®** Heavy Duty Hammer Tacker

- · Chrome-plated steel construction frame for corrosion resistance and durability
- Bottom-load magazine saves reload time and prevents loss of pusher
- Surface guard prevents underlayment damage
- Ergonomic comfort rubber handle minimizes fatigue and maximizes comfort
- Uses Heavy Duty staples, 5/16", 3/8" and 1/2"


US Only Toll Free Customer Service Number: 1-800-556-6696

US Only Customer Service FAX Number: 1-800-842-9360

**BHT250** 





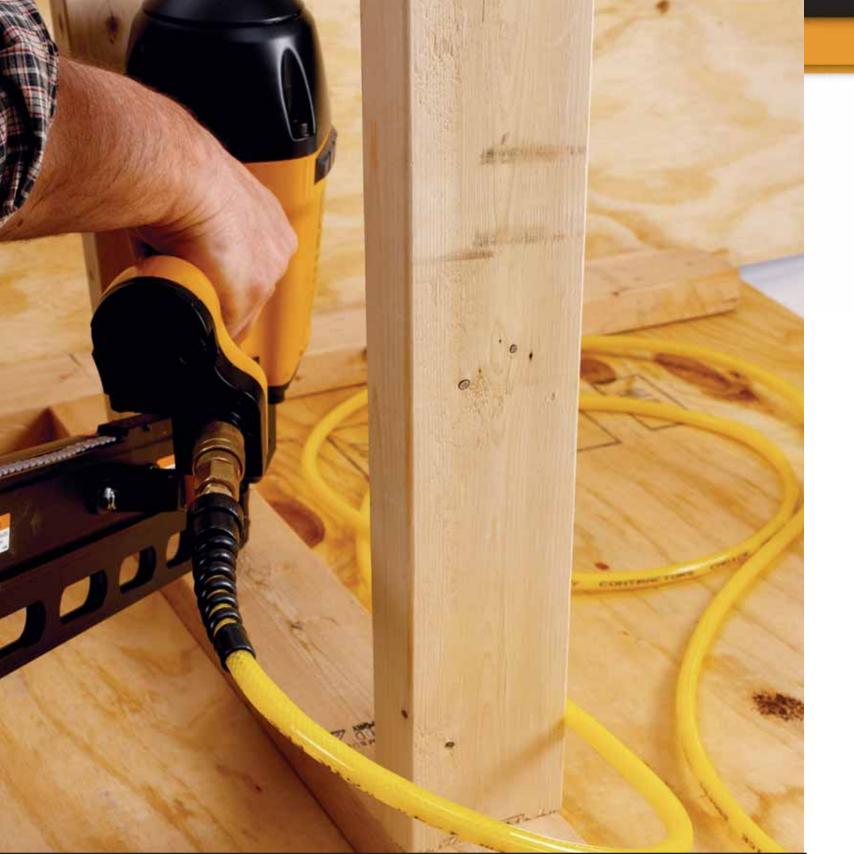

# AIR ACCESSORIES & AIR HOSES

# **AIR ACCESSORIES & AIR HOSES**

# **INDUSTRIAL FITTINGS**

Pre-applied thread sealant for airtight connections. Simplifies field installation by eliminating the need for thread sealant tape
Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers)
6-ball coupler design for balanced, strong, secure connections

CVII #	SPECIFI	CATION	N	PT
SKU#	SERIES	STYLE	SIZE	THREAD
BTFP72318	1/4"	Plug	1/4"	Male
IP-14M-BM 50 pc Bulk Pack	1/4"	Plug	1/4"	Male
BTFP72319	1/4"	Plug	1/4"	Female
IP-14F-BM 50 pc Bulk Pack	1/4"	Plug	1/4"	Female
IP38-38M	3/8"	Plug	3/8"	Male
IP38-38F	3/8"	Plug	3/8"	Female
ISWIVEL-14M	1/4"	Swivel Plug	1/4"	Male
IC-14M	1/4"	Coupler	1/4"	Male
IC-14M-BM 50 pc Bulk Pack	1/4"	Coupler	1/4"	Male
IC-14F	1/4"	Coupler	1/4"	Female
IC-14F-BM 50 pc Bulk Pack	1/4"	Coupler	1/4"	Female
IHKIT-14F	1/4"	Contains one BTFP72319 and one IC-14F	1/4"	Female



Plug Coupler
1/4" Series, 1/4" Male Thread



**Swivel Plug** 1/4" Series, 1/4" Male Thread



**Plug Coupler** 1/4" Series, 1/4" Female Thread

# **AUTOMOTIVE FITTINGS**

Pre-applied thread sealant for airtight connections. Simplifies field installation by eliminating the need for thread sealant tape Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers) 6-ball design (1/4" coupler series and 8-ball design (3/8" coupler series) for balanced, strong, secure connections

SKU #	SPECIFICATION		NPT	
3NU #	SERIES	STYLE	SIZE	THREAD
AP-14M	3/8"	Plug	1/4"	Male
AP-14F	3/8"	Plug	1/4"	Female
AP-38M	3/8"	Plug	3/8"	Male
AP-38F	3/8"	Plug	3/8"	Female









Coupler 3/8" Series, 1/4" Male Thread

Plug Coupler 3/8" Series, 1/4" Female Thread

UNIVERSAL COUPLERS						
CVII #	SPECI	FICATION	N	PT		
SKU #	SERIES	STYLE	SIZE	THREAD		
BTFP72320	1/4"	Push-to-Connect	1/4"	Male		
BTFP72321	1/4"	Push-to-Connect	1/4"	Female		
UC38-14M	3/8"	Push-to-Connect	1/4"	Male		
UC38-14F	3/8"	Push-to-Connect	1/4"	Female		



**Universal Coupler** 1/4" Series, 1/4" Female Thread



**Universal Coupler** 3/8" Series, 1/4" Female Thread

#### **COMPRESSOR ACCESSORIES** SKU# DESCRIPTION SIZE **THREAD BTFP72326** Regulator & Gauge Kit 1/4" N/A **IREGULATOR** Industrial Regulator & Gauge 1/4" Female **BTFP72328** 1-1/2" Pressure Gauge 1/4" Female TIRE-14F Tire Chuck 1/4" Female TEE-14F Tee Fitting 1/4" Female **BTFP72641** Inline Lubricator 1/4" Male 1/4" BTFP72330 ≪ Safety Blow Gun Female **BTFP72327** Ball Type Drain Valve 1/4" Male **3WAY-RND** 3-Way Manifold 3/8" NPT Inlet to 1/4" NPT Outlet **REDUCERS & BUSHINGS** NPT SKU# **DESCRIPTION** SIZE **THREAD** 14M-14M Hex Nipple 1/4" Male 14F-14F 1/4" Hex Coupler Female 38M-38M Hex Nipple 3/8" Male 38M-14F Hex Reducer Bushing 3/8" Male Thread to 1/4" Female Thread 38M-14M Hex Reducer Nipple 3/8" Male Thread to 1/4" Male Thread 38F-14F Hex Reducer Coupler 3/8" Female Thread to 1/4" Female Thread 38F-14M 3/8" Female Thread to 1/4" Male Thread Hex Adaptor

# **REPAIR ACCESSORIES**

SKU# DESCRIPTION		DESCRIPTION	NPT		
3KU #		DESCRIFTION	SIZE	THREAD	
THREADTAPE	1	Thread Sealant Tape	1	Roll	

**BOSTITCH** 

# **AIR ACCESSORIES & AIR HOSES**

# Hoses

SKU#	DESCRIPTION	
PRO-1450	1/4" x 50' Premium Quality Ribbed Polyurethane Air Hose	
PRO-14100	1/4" x 100' Premium Quality Ribbed Polyurethane Air Hose	
PRO-3850	3/8" x 50' Premium Quality Ribbed Polyurethane Air Hose	THE RESERVE OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TO THE PERSON NA
PRO-38100	3/8" x 100' Premium Quality Ribbed Polyurethane Air Hose	
HOPB1450	1/4" x 50' PVC And Rubber Blend Air Hose	
HOPB14100	1/4" x 100' PVC And Rubber Blend Air Hose	
HOPB3850	3/8" x 50' PVC And Rubber Blend Air Hose	
HOPB38100	3/8" x 100' PVC And Rubber Blend Air Hose	

# **Hose Repair Kits**

SKU#	DESCRIPTION	
PRO-14 REPAIR	Repair Kit for 1/4" PROZ-HOSE Ribbed Polyurethane Air Hose	BOSTITCH  OF Manual Parameters  OF Manual Pa
PRO-38 REPAIR	Repair Kit for 3/8" PROZ-HOSE Ribbed Polyurethane Air Hose	1/4
HREPAIR-38	Repair Kit for 3/8" Round Polyurethane Air Hose	

# Lubricants

SKU#	DESCRIPTION	
PREMOIL-40Z	4 oz. Premium Grade Pneumatic Tool Lubricant	
PREMOIL-200Z	20 oz. Premium Grade Pneumatic Tool Lubricant	
WINTEROIL-40Z	4 oz. Winter Grade Pneumatic Tool Lubricant	
WINTEROIL-200Z	20 oz Winter Grade Pneumatic Tool Lubricant	- 太 太 太 太
PREMCOMOIL-320Z	Non-Detergent Air Compressor Lubricant	
SYNCOMOIL-200Z	All-Season Synthetic Lubricant	
9B12147R	Gas Cordless Tool Oil	

# **O-Ring Kits**

SKU#	DESCRIPTION	
N880RK	N88 O-Ring Kit	
N890RK	F21PL, F28WW, F33PT, N89C O-Ring Kit	
ORK1	N50FN, N59FN, N60FN, T40, T50 O-Ring Kit	o <sub>O</sub> .
ORK6	MIIIFS, MIIIFN O-Ring Kit	
ORK10	S32, BT35, BT50, PC5000 O-Ring Kit	
ORK11	N79, N80, N90, N95 O-Ring Kit	
ORK12	N63, N64, SDCN14 O-Ring Kit	111
ORK13	RN45 O-Ring Kit	· ·
120965	PN100 O-Ring Kit	
186190	PN50 O-Ring Kit	

# **Rebuild Kits**

SKU#	DESCRIPTION	
BOSCAP-RK	SB150SLBC, SB-1664FN Rebuild Kit	
BT55/SX38-RK	BT1855K/SX1838K Rebuild Kit	
B125K-RK	BT125 Rebuild Kit	
BT200-RK	BT200 Rebuild Kit	
FN16250K-RK	BT16250 Rebuild Kit	
FN1664-RK	FN1664K Rebuild Kit	
MCN-RK	MCN150/MCN250 Rebuild Kit	
MIIISK	MIIIFS, MIIIFN Rebuild Kit	BOSTITCH MICHIGAN THEWAY
N62-RK	N62 Rebuild Kit	The Design of the Control of the Con
N66C-RK	N66BC, N66C, N66, N75 Rebuild Kit	
RN46-RK	RN46 Rebuild Kit	
SX150-RK	SX150 Rebuild Kit	
N62FNB-RK	N62FNB Rebuild Kit	
DA1564K-RK	DA1564K Rebuild Kit	

# **Vinyl Siding & Depth Kits**

SKU#	DESCRIPTION	
108551	650S4 Vinyl Siding Trip	
108550	438S4/538S4 Vinyl Siding Trip	E PARTIE DE LA CONTROL DE LA C
VSA4	RN46 Vinyl Siding Adaptor	овищен
DC3	N80CB Dial-A-Depth Kit	a la

**50** 

**BOSTITCH** 




# **FRAMING**

# 28° Wire Weld Full Round Head Stick Framing Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
S6D-FH	2" x .113"	Smooth	Coated	Diamond	2000	
S6DGAL-FH	2" x .113"	Smooth	Thickcoat™	Diamond	2000	
S6DR113-FH	2" x .113"	Ring	Coated	Diamond	2000	
S6DR113GAL-FH	2" x .113"	Ring	Thickcoat™	Diamond	2000	
S8D-FH	2-3/8" x .120"	Smooth	Coated	Diamond	2000	
S8DGAL-FH	2-3/8" x .120"	Smooth	Thickcoat™	Diamond	2000	
S8DR-FH	2-3/8" x .120"	Ring	Coated	Diamond	2000	
S8DRGAL-FH	2-3/8" x .120"	Ring	Thickcoat™	Diamond	2000	
S8D131GAL-FH	2-3/8" x .131"	Smooth	Hot dipped	Diamond	2000	
S10D-FH	3" x .120"	Smooth	Coated	Diamond	2000	
S10DGAL-FH	3" x .120"	Smooth	Thickcoat™	Diamond	2000	BOSTITCH® N79WW, N80SB,
S10DR-FH	3" x .120"	Ring	Coated	Diamond	2000	N86S, N88WWB,
S10DRGAL-FH	3" x .120"	Ring	Thickcoat™	Diamond	2000	N100S, F28WW, GF28WW,
S10DS-FH	3" x .120"	Screw	Coated	Diamond	2000	LPF28WW
S10D131-FH	3" x .131"	Smooth	Coated	Diamond	2000	
S10D131GAL-FH	3" X .131"	Smooth	Hot dipped	Diamond	2000	
S12D-FH	3-1/4" x .120"	Smooth	Coated	Diamond	2000	
S12DGAL-FH	3-1/4" x .120"	Smooth	Thickcoat™	Diamond	2000	
S12DS-FH	3-1/4" x .120"	Screw	Coated	Diamond	2000	
S12DSGAL-FH	3-1/4" x .120"	Screw	Thickcoat™	Diamond	2000	
\$12D131-FH	3-1/4" x .131"	Smooth	Coated	Diamond	2000	
S12DR131-FH	3-1/4" x .131"	Ring	Coated	Diamond	2000	
S12D131GAL-FH	3-1/4" X .131"	Smooth	Hot dipped	Diamond	2000	
S12DR131GAL-FH	3-1/4" X .131"	Ring	Hot dipped	Diamond	2000	
\$16D131-FH	3-1/2" x .131"	Smooth	Coated	Diamond	2000	BOSTITCH®
S16D131GAL-FH	3-1/2" x .131"	Smooth	Thickcoat™	Diamond	2000	N79WW, N80SB, N86S, N88WWB, N100S, F28WW, GF28WW

FITS COMPETITOR TOOLS Hitachi NR90AF • Max SN883CH/28, SN890CH/28 • Grip Rite GRTFW83

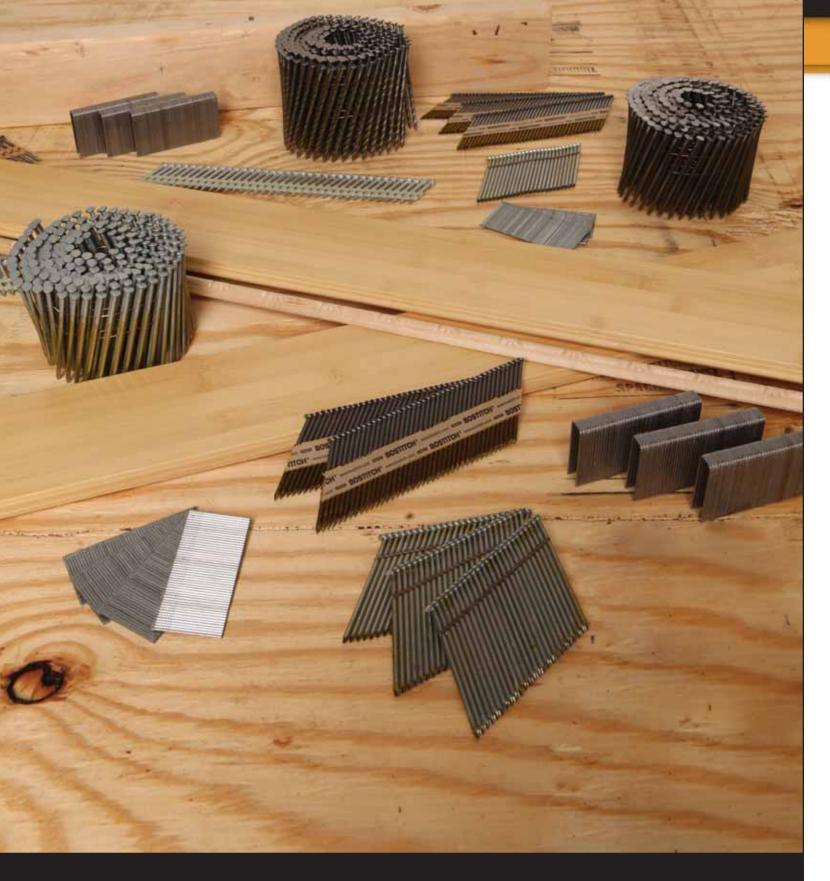

# FASTENERS

# **FRAMING**



# 30° Paper Collated Stick Framing Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
PT-6D113FH5	2" x .113"	Smooth	Coated	Diamond	5000	
PT-8D113FH5	2-3/8" x .113"	Smooth	Coated	Diamond	5000	
PT-8D113GFH2	2-3/8" x .113"	Smooth	Hot dipped	Diamond	2000	
PT-8DR113FH5	2-3/8" x .113"	Ring	Coated	Diamond	5000	
PT-8DR113GFH2	2-3/8" x .113"	Ring	Hot dipped	Diamond	2000	
PT-10D120FH25	3" x .120"	Smooth	Coated	Diamond	2500	BOSTITCH®
PT-10D120GFH2	3" x .120"	Smooth	Hot dipped	Diamond	2000	F33PT, N90PT, LPF33PT, GF33PT
PT-10D131FH25	3" x .131"	Smooth	Coated	Diamond	2500	2
PT-10DR120GFH2	3" x .120"	Ring	Hot dipped	Diamond	2000	
PT-12D120FH25	3-1/4" x .120"	Smooth	Coated	Diamond	2500	
PT-12D131FH25	3-1/4" x .131"	Smooth	Coated	Diamond	2500	
PT-12D131GFH2	3-1/4" x .131"	Smooth	Hot dipped	Diamond	2000	
PT-16D131FH2	3-1/2" x .131"	Smooth	Coated	Diamond	2000	BOSTITCH®
PT-16D131GFH2	3-1/2" x .131"	Smooth	Hot dipped	Diamond	2000	F33PT, N90PT, GF33PT

DEWALT® D51825, DCN692, D51822 • Paslode F350S, CF325, CF325Li, PF350S, IM350, IM90i • Hitachi NR83AA3, NR90AD, NR90GC • Porter-Cable® FC350A, FC350B • Senco SN901XP, SN951XP, FP701XP, FP601 • Ridig R350CHA • Max SN890CH/34, SN883CH/34 • Griprite GRTCH350, GRTFC83



# STRAPSHOT™ 35° Paper Collated Metal Connector Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
PT-MC13115-1M	1-1/2" x .131"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC13115G-1M	1-1/2" x .131"	Smooth	Brite Heat Treated	Diamond	1000	BOSTITCH® F33PT, MCN150, MCN250
PT-MC14815-1M	1-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC14815G-1M	1-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC14825G-1M	2-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	<b>BOSTITCH</b> ® F33PT, MCN250
		FITS CO	MPETITOR TOOLS	S		

Hitachi NR65AK • Paslode F250S-PP • Rap-A-Nail RN150, RN250

# **FRAMING**



# 15° Coil Framing Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
C4PSTIF	1-1/2" x .099"	Smooth	Stiff	Diamond	3600	BOSTITCH®
AC4D113BDP	1-1/2" x .113"	Smooth	Coated	Blunt Diamond	7500	N75C, N80CB
C6P99D	2" x .099"	Smooth	Coated	Diamond	3600	
C6P99DG	2" x .099"	Smooth	Thickcoat™	Diamond	3600	
C6R99BC	2" x .099"	Ring	Coated	Blunt Chisel	3600	
C6R99BCG	2" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C6R99BDSS	2" x .099"	Ring	Stainless	Blunt Diamond	3600	
C7R99BCG	2-1/4" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C7PSTIF	2-1/4" x .099"	Smooth	Stiff	Diamond	3600	
C8P99D	2-1/2" x .099"	Smooth	Coated	Diamond	3600	
C8P99DG	2-1/2" x .099"	Smooth	Thickcoat™	Diamond	3600	
C8R99BCG	2-1/2" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C8R99BD	2-1/2" x .099"	Ring	Coated	Blunt Diamond	3600	PASTITALIS
C8R99BDSS	2-1/2" x .099"	Ring	Stainless	Blunt Diamond	3600	N80CB, N89C,
C8R113DG	2-3/8 x .113"	Smooth	Thickcoat™	Diamond	2700	N100C, N75C
C8P120D	2-1/2" x .120"	Smooth	Coated	Diamond	2700	1
C8P131D-4.5M	2-1/2" x .131"	Smooth	Coated	Diamond	4500	
C10P120D	3" x .120"	Smooth	Coated	Diamond	2700	
C10P120DG	3" x .120"	Smooth	Thickcoat™	Diamond	2700	
C10P131D	3" x .131"	Smooth	Coated	Diamond	2700	
C8P99D	2-3/8" x .099"	Smooth	Coated	Diamond	3600	
C8R113BD	2-3/8" x .113"	Ring	Coated	Blunt Diamond	2700	
AC10DR	3" x .120"	Ring	Coated	Blunt Diamond	4500	
C10R120DSS	3" x .120"	Ring	Stainless	Diamond	2700	
C10S120DG	3" x .120"	Screw	Thickcoat™	Diamond	2700	
C12P120D	3-1/4" x .120"	Smooth	Coated	Diamond	2700	
C12P120DG	3-1/4" x .120"	Smooth	Thickcoat™	Diamond	2700	
C12R120DSS	3-1/4" x .120"	Ring	Stainless	Diamond	2700	BOSTITCH® N80CB, N89C,
AC12DS	3-1/4" x .120"	Screw	Coated	Blunt	4500	N100C
C12S120DG	3-1/4" x .120"	Screw	Thickcoat™	Diamond	2700	
C12P131D	3-1/4" x .131"	Smooth	Coated	Diamond	2700	
C16P131D	3-1/2" x .131"	Smooth	Coated	Diamond	2700	BOSTITCH®
C16P131DG	3-1/2" x .131"	Smooth	Thickcoat™	Diamond	2700	N89C, N100C
C20S120D	4" x .120"	Screw	Coated	Diamond	2700	BOSTITCH®
C20P131D	4" x .131"	Smooth	Coated	Diamond	2700	N100C, N100CPP,
C20P131DG	4" x .131"	Smooth	Thickcoat™	Diamond	2700	N400C

DUOFAST CNW-75 • Hitachi NV83A • Makita AN901 • Max 890C • Paslode F275C, P275C, F325C, P325C, P325C

US Only Toll Free Customer Service Number: 1-800-556-6696

## **FRAMING**

21° Plastic Collated Metal Connector Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
RH-MC14815G-S	1-1/2" x .148"	Smooth	Thickcoat™ Heat Treated	Diamond	1000	BOSTITCH® N88RH-2MCN, F21PL

# 21° Plastic Collated Full Round Head Framing Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
RH-S6DEP	2" x .113"	Smooth	Coated	Diamond	6000	
RH-S8D113EP	2-3/8" x .113"	Smooth	Coated	Diamond	5000	
RH-S8D113HDG	2-3/8" x .113"	Smooth	Hot Dipped	Diamond	5000	
RH-S8DR113EP	2-3/8" x .113"	Ring	Coated	Diamond	5000	
RH-S8DR113HDG	2-3/8" x .113"	Ring	Hot Dipped	Diamond	5000	
RH-S8D131EP	2-1/2" x .131"	Smooth	Coated	Diamond	5000	
RH-S8D131HDG	2-1/2" x .131"	Smooth	Hot Dipped	Diamond	5000	BOSTITCH®
RH-S10D120EP	3" x .120"	Smooth	Coated	Diamond	4000	N88RH, F21PL, LPF21PL
RH-S10D120HDG	3" x .120"	Smooth	Hot Dipped	Diamond	4000	
RH-S10DR120HDG	3" x .120"	Ring	Hot Dipped	Diamond	4000	
RH-S10D131EP	3" x .131"	Smooth	Coated	Diamond	4000	
RH-S10D131HDG	3" x .131"	Smooth	Hot Dipped	Diamond	4000	
RH-S10DR131EP	3" x .131"	Ring	Coated	Diamond	4000	
RH-S10DR131HDG	3" x .131"	Ring	Hot Dipped	Diamond	4000	
RH-S12D120EP	3" x .148	Smooth	Coated	Diamond	3000	BOSTITCH®
RH-S12D120EP	3-1/4" x .120	Smooth	Coated	Diamond	4000	F21PL, N79RH, N88RH-2MCN,
RH-S12D131EP	3-1/4" x .131	Smooth	Coated	Diamond	4000	N88RH, N95RHN,
RH-S12D131HDG	3-1/4" x .131	Smooth	Hot Dipped	Diamond	4000	LPF21PL
RH-S16D131EP	3-1/2" x .131	Smooth	Coated	Diamond	4000	BOSTITCH®
RH-S16D131HDG	3-1/2" x .131	Smooth	Hot Dipped	Diamond	4000	F21PL, N79RH, N88RH-2MCN, N88RH, N95RHN
S38-100B	4" x .150	Smooth	Coated	Diamond	1250	
S38-115B	4-1/2" x .150	Smooth	Coated	Diamond	1250	BOSTITCH®
S34S-115B	4-1/2" x .134	Screw	Coated	Diamond	1250	KN85PP, BIGBERTA160,
S38-130B	5-1/8" x .150	Smooth	Coated	Diamond	1250	BRT130
S42-130B	5-1/8" x .165	Smooth	Coated	Diamond	660	
S42-160B	6-1/4" x .165	Smooth	Coated	Diamond	660	BOSTITCH® BIGBERTA160

FITS COMPETITOR TOOLS

DEWALT D51845, D51850 • DUOFAST CN350B • Hitachi NR83A, MR90AC • Makita AN922, AM8300 • Paslode 5300, F350SRH PORTER-CABLE® F350, FR350MAG, DR350B • Ridgid R350RHA • Senco SCN60, SCN65, SN65C, FramePro FRH

# **ROOFING**

15° Coil Roofing Nails

	•					
SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
CR19GAL	3/4"	Smooth	Galvanized	Diamond	7200	
CR2DCGAL	7/8"	Smooth	Galvanized	Diamond	7200	
CR2DGAL	1"	Smooth	Galvanized	Diamond	7200	
CR3DGAL	1-1/4"	Smooth	Galvanized	Diamond	7200	BOSTITCH®
CR3DSS	1-1/4"	Smooth	Stainless Steel	Diamond	7200	RN45B, RN46
CR4DGAL	1-1/2"	Smooth	Galvanized	Diamond	7200	
CR4DSS	1-1/2"	Smooth	Stainless Steel	Diamond	7200	
CR5DGAL	1-3/4"	Smooth	Galvanized	Diamond	7200	
		EITC	COMPETITOR TO	OLC		

FITS COMPETITOR TOOLS

ATRO CN134, Roofing Roll • CRAFTSMAN 18324, 154500 • DEWALT D51321 • Paslode 3175RCU • Hitachi NV45AB, NV45AB, NV45AB, NV45AB • Hitachi NV45AB, NV45AB, NV45AB • PORTER-CABLE® F350 • Ridgid R350CHA • Senco SN2+, SN3, SN325+. SN4,SN70, FramePro

### **STAPLES**

16. 16-Gauge 1" Crown Construction Staples

SKU#	SIZE	CROWN	FINISH	POINT STYLE	QUANTITY	FITS
16S2-16	21/32"	1"	Brite	Chisel	15000	
16S2-16GAL	21/32"	1"	Galvanized	Chisel	15000	
16S2-19	3/4"	1"	Brite	Chisel	13500	
16S2-19GAL	3/4"	1"	Galvanized	Chisel	13500	
16S2-22	7/8"	1"	Brite	Chisel	12000	
16S2-22GAL	7/8"	1"	Galvanized	Chisel	12000	<b>BOSTITCH®</b> 438S2R, 438S2,
16S2-25	1"	1"	Brite	Chisel	10500	450S2, T40S2
16S2-25GAL	1"	1"	Galvanized	Chisel	10500	
16S2-31	1-1/4"	1"	Brite	Chisel	9000	
16S2-31GAL	1-1/4"	1"	Galvanized	Chisel	9000	
16S2-38	1-1/2"	1"	Brite	Chisel	7500	
16S2-38GAL	1-1/2"	1"	Galvanized	Chisel	7500	
16S2-44	1-3/4"	1"	Brite	Chisel	6000	BOSTITCH®
16S2-50GAL	2"	1"	Galvanized	Chisel	6000	450S2, T40S2

**56** 

# **FINISH & TRIM**

# 15-Gauge "FN" Style Angled Finish Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
FN1520-1M	1-1/4"	Chisel	Coated	1000	
FN1520	1-1/4"	Chisel	Coated	3655	
FN1524-1M	1-1/2"	Chisel	Coated	1000	
FN1524-1MSS	1-1/2"	Chisel	Stainless	1000	
FN1524	1-1/2"	Chisel	Coated	3655	
FN1528	1-3/4"	Chisel	Coated	3655	BOSTITCH®
FN1532-1M	2"	Chisel	Coated	1000	GFN1564K, N59FN,
FN1532-1MSS	2"	Chisel	Stainless	1000	N60FN, N62FN
FN1532	2"	Chisel	Coated	3655	
FN1536	2-1/4"	Chisel	Coated	3655	
FN1540-1M	2-1/2"	Chisel	Coated	1000	
FN1540-1MSS	2-1/2"	Chisel	Chisel Stainless		
FN1540	2-1/2"	Chisel	Coated	3655	

# 15-Gauge "DA" Style Angled Finish Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS			
DA-1520	1-1/4"	Chisel	Coated	4000				
DA-1524	1-1/2"	Chisel	Coated	4000	BOSTITCH®			
DA-1532	2"	Chisel	Coated	4000	DA1564K			
DA-1540	2-1/2"	Chisel	Coated	4000				
FII	FITS COMPETITOR TOOLS PORTER-CABLE® DA250C, DA250B, DA250A, Dewalt D51276K, D51275K, DC628K							

# 16-Gauge Straight Finish Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS			
SB16-1.25-1M	1-1/4"	Chisel	Coated	1000				
SB16-1.5-1M	1-1/2"	Chisel	Coated	1000				
SB1615SS	1-1/2"	Chisel	Stainless	500				
SB16-1.50	1-1/2"	Chisel	Coated	2500				
SB16-1.75-1M	1-3/4"	Chisel	Coated	1000	BOSTITCH®			
SB16-2.00-1M	2"	Chisel	Coated	1000	GFN1664K, FN16250K,			
SB1620SS	2"	Chisel	Stainless	500	SB-1664FN, FN1664K			
SB16-2.00	2"	Chisel	Coated	2500				
SB16-2.5-1M	2-1/2"	Chisel	Coated	1000				
SB1625SS	2-1/2"	Chisel	Stainless	500				
SB16-2.50	2-1/2"	Chisel	Coated	2500				
	FITS MOST OTHER 16-GAUGE STRAIGHT FINISH NAILERS							

# **FINISH & TRIM**



# 18-Gauge Brads

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
BT1300B-1M	5/8"	Chisel	Coated	1000	
BT1300B	5/8"	Chisel	Coated	3000	
BT1303B-1M	3/4"	Chisel	Coated	1000	
BT1303B	3/4"	Chisel	Coated	3000	
BT1309B-1M	1"	Chisel	Coated	1000	BOSTITCH®
BT1309B	1"	Chisel	Coated	3000	GBT1850K, SB-1850BN,
BT1314B-1M	1-3/16"	Chisel	Coated	1000	SB-2IN1, BT125K-2, BT200K-2, BT1855K,
BT1314B	1-3/16"	Chisel	Coated	3000	BTFP71875
BT1332B-1M	1-1/4"	Chisel	Coated	1000	
BT1332SS	1-1/4"	Chisel	Stainless	500	
BT1335B-1M	1-3/8"	Chisel	Coated	1000	
BT1335B	1-3/8"	Chisel	Coated	3000	
BT1338B-1M	1-1/2"	Chisel	Coated	1000	
BT1338B	1-1/2"	Chisel	Coated	2000	
BT1340B	1-9/16"	Chisel	Coated	2000	
BT1342B-1M	1-5/8"	Chisel	Coated	1000	BOSTITCH®
BT1345B-1M	1-3/4"	Chisel	Coated	1000	GBT1850K, SB-1850BN, SB-2IN1, BT200K-2,
BT1345B	1-3/4"	Chisel	Coated	2000	BT1855K
BT1350B-1M	2"	Chisel	Coated	1000	
BT1350SS	2"	Chisel	Stainless	500	
BT1350B	2"	Chisel	Coated	2000	
FITS	COMPETITOR TOOLS	PORTER-CABLE® BN138,	BN125A, BN200B, BN200A, I	Dewalt D51236K, D51238K, [	DC608K

# 18-Gauge 7/32" Crown Staples

SKU#	SIZE	CROWN	FINISH	ОТУ.	FITS
SX50351/2G-7M	1/2"	7/32"	Coated	7000	
SX50355/8G	5/8"	7/32"	Coated	5000	
SX50353/4G	3/4"	7/32"	Coated	5000	
SX50357/8G	7/8"	7/32"	Coated	5000	BOSTITCH®
SX50351G	1"	7/32"	Coated	5000	SX1838K, SX150K-1,
SX50351SS-1M	1"	7/32"	Stainless	1000	SB-150SX, SB-2IN1, EHF1838K,
SX50351-1/8G	1-1/8"	7/32"	Coated	3000	S32SX-BHF-2,
SX50351-3/16G	1-3/16"	7/32"	Coated	3000	SX150-BHF-2
SX50351-1/4G	1-1/4"	7/32"	Coated	3000	
SX50351-3/8G	1-3/8"	7/32"	Coated	3000	
SX503513/8SS1M	1-3/8"	7/32"	Stainless	1000	
SX503511/2G	1-1/2"	7/32"	Coated	3000	

58

**BOSTITCH** 

# **FINISH & TRIM**



# 23-Gauge Pin Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
PT-2312-3M	1/2"	Chisel	Coated	3,000	
PT-2319-3M	3/4"	Chisel	Coated	3,000	BOSTITCH®
PT-2325-3M	1"	Chisel	Coated	3,000	TU-216-2330, HP118K
PT-2330-3M	1-3/16"	Chisel	Coated	3,000	
		COMPETITOR TOOLS	BORTER GARLES BINIAGO	DINIAGO	

### **SPECIALTY & FLOORING**



# FS 15.5-Gauge 1/2" Crown Hardwood Flooring Staples

SKU#	SIZE	CROWN	FINISH	POINT STYLE	QUANTITY	FITS
BCS1512	1-1/2"	1/2"	Coated	Chisel	9600	
BCS1512-1M	1-1/2"	1/2"	Coated	Chisel	1000	
BCS1514	1-3/4"	1/2"	Coated	Chisel	7728	
BCS1516	2"	1/2"	Coated	Chisel	7728	BOSTITCH® MIIIFS
BCS1516-1M	2"	1/2"	Coated	Chisel	1000	
BCS1516SS-1M	2"	1/2"	Stainless	Chisel	1000	
BCS1516-SQ	2"	1/2"	Coated	Chisel	500	



# L-Shaped Hardwood Flooring Cleats

SKU#	SIZE	FINISH	QUANTITY	FITS
FLN-150	1-1/2"	Coated	1000	BOSTITCH®
FLN-200	2"	Coated	1000	MIIIFN, MFN-200, MFN-201



# 20-Gauge Flooring Staple

SKU#	SIZE	CROWN	FINISH	QUANTITY	POINT STYLE	FITS
SB97-1GLS	1"	3/16"	Coated	5000	Chisel	<b>BOSTITCH®</b> LHF2025K, LHF97125-2, S3297-LHF-2

# **SPECIALTY**

# 15° Wire Weld Coil Siding Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
AC3D080BDP	1-1/4" x .080	Smooth	Coated	Blunt Diamond	14000	
AC3DR080BDP	1-1/4" x .080	Ring	Coated	Blunt Diamond	14000	
C3R80BDG	1-1/4" x .080	Ring	ThickcoatTM	Blunt Diamond	4200	
C3R90BDSS	1-1/4" x .090"	Ring	Stainless	Blunt Diamond	3600	
C3R90BDSS-316	1-1/4" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	BOSTITCH®
AC4D080BDP	1-1/2" x .080	Smooth	Coated	Blunt Diamond	14000	N63CP, N64C,
AC4DR080BDP	1-1/2" x .080	Ring	Coated	Blunt Diamond	14000	N66C, N66BC
C4R80BDG	1-1/2" x .080	Ring	ThickcoatTM	Blunt Diamond	4200	
AC5D080BDP	1-3/4" x .080	Smooth	Coated	Blunt Diamond	14000	
AC5DR080BDP	1-3/4" x .080	Ring	Coated	Blunt Diamond	14000	
C5R80BDG	1-3/4" x .080	Ring	ThickcoatTM	Blunt Diamond	4200	
C4R90BDSS	1-1/2" x .090	Ring	Stainless	Blunt Diamond	3600	
C4R90BDSS-316	1-1/2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
C5R90BDSS	1-3/4" x .092	Ring	Stainless	Blunt Diamond	3600	
C5R90BDSS-316	1-3/4" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
AC6D090BDP	2" x .092	Smooth	Coated	Blunt Diamond	12000	
C6P90BDG	2" x .092	Smooth	ThickcoatTM	Blunt Diamond	3600	
AC6DR090BDP	2" x .092	Ring	Coated	Blunt Diamond	12000	
C6R90BDG	2" x .092	Ring	ThickcoatTM	Blunt Diamond	3600	
C6R90BDSS	2" x .092	Ring	Stainless	Blunt Diamond	3600	BOSTITCH® N63CP, N64C,
C6R90BDSS-316	2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	N66C, N66BC, N75C
C7P90BDG	2-3/16" x .092	Smooth	ThickcoatTM	Blunt Diamond	3600	
C7R90BDG	2-3/16" x .092	Ring	ThickcoatTM	Blunt Diamond	3600	
C7R90BDSS	2-3/16" x .092	Ring	Stainless	Blunt Diamond	3600	
C7R90BDSS-316	2-3/16" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
C8P90BDG	2-1/2" x .092	Smooth	ThickcoatTM	Blunt Diamond	3600	
C8R90BDG	2-1/2" x .092	Ring	ThickcoatTM	Blunt Diamond	3600	
AC8DRSS	2-1/2" x .092	Ring	Stainless	Blunt Diamond	3600	
C8R90BDSS-316	2-1/2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
	FITS COMPETITOR	TOOLS Hitachi NV6	5AH, Max CN565, Makit	ta AN611, PORTER-CABI	LE® COIL200, COIL250	

# 18-Gauge 5/16" Crown Staples

SKU#	SIZE	CROWN	FINISH	QUANTITY	FITS
SL51351G	1"	5/16"	Coated	5000	BOSTITCH®
SL51351-1/2G	1-1/2"	5/16"	Coated	3000	SB1838BC, SL1838BC

**BOSTITCH** 

# **SPECIALTY**

# 16 BOSTITCH® Caps

SKU#	DESCRIPTION	QUANTITY	FITS
SB-CAPS	BOSTITCH® Caps	1000	<b>BOSTITCH®</b> SL1838BC, SB150SLBC, N66BC
CAPPAK-1M	BOSTITCH® Caps & 1" Staples	1000 each	BOSTITCH®
CAPPAK-5M	BOSTITCH® Caps & 1" Staples	5000 each	SB150SLBC, SL1838BC

# 15 Plastic Inserted Coil Siding Nails

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
ACP5DSALM	1-3/4" x .099 "	Screw	Aluminum	Diamond	2400	BOSTITCH®
ACP6D090BDG	2" x .090"	Ring	Galvanized	Diamond	3600	N63CP, N65CP, N66C, N66BC, N75C
	FITS COMPI	ETITOR TOOLS Hita	achi NV65AH <b>, Max</b> CN5	65, <b>Makita</b> AN611, <b>Se</b> nd	o SCN55S	

# T-Nails for Drywall Track or Wood into Concrete, Block or Masonry

SKU#	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
BT484GXH-2.5M	9/16" x .097"	Hardened/ Coated	Smooth	Diamond	2500	
BT461H-2.5M	5/8" x .097"	Stiff	Smooth	Diamond	2500	
BT461XH-2.5M	5/8" x .097"	Hardened	Smooth	Diamond	2500	
BT488XH-2.5M	3/4" x .097"	Hardened	Smooth	Diamond	2500	BOSTITCH®
BT490XH-2.5M	1-1/8" x .097"	Hardened	Smooth	Diamond	2500	MIII812CNCT
BT499H-2.5M	1-3/8" x .097"	Hardened	Smooth	Diamond	2500	
BT493XH-2.5M	1-3/8" x .097"	Stiff	Smooth	Diamond	2500	
BT471XH-2.5M	1-1/2" x .097"	Hardened	Smooth	Diamond	2500	
BT481H-2.5M	2-1/4" x .097"	Stiff	Smooth	Diamond	2500	

# 15° Coil Pins for Gypsum, Plywood, OSB and Steel Sheathing to Steel Framing

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
GC4S100BG	1-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH® SF150C, N75C-1,
C4S100BG	1-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	N89CB-1, N89C-1
GC6S100BG	2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH®
GC8S100BG	2-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	N75C-1, N89CB-1, N89C-1
C6S100BG	2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	
C2S100BG	1" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH® SF150C

# **STAPLES**

# 16-Gauge 1/2" Crown Construction Staples

SKU#	SIZE	CROWN	FINISH	POINT	ΩТҮ.	FITS
16\$4-19	3/4"	1/2"	Brite	Chisel	25650	BOSTITCH®
16S4-19GAL	3/4"	1/2"	Galvanized	Chisel	25650	438S4
<b>16S4-25</b>	1"	1/2"	Brite	Chisel	19950	
16S4-25GAL	1"	1/2"	Galvanized	Chisel	19950	
16S4-31	1-1/4"	1/2"	Brite	Chisel	17100	
16S4-31GAL	1-1/4"	1/2"	Galvanized	Chisel	17100	
16\$4-34	1-3/8"	1/2"	Brite	Chisel	14250	<b>BOSTITCH®</b> 438S4, 650S4
16S4-34GAL	1-3/8"	1/2"	Galvanized	Chisel	14250	.000.,0000.
16\$4-38	1-1/2"	1/2"	Brite	Chisel	14250	
16S4-38GAL	1-1/2"	1/2"	Galvanized	Chisel	14250	
16S4-38SS-1M	1-1/2"	1/2"	Stainless	Chisel	1050	
16\$4-41	1-5/8"	1/2"	Brite	Chisel	11400	
16S4-41GAL	1-5/8"	1/2"	Galvanized	Chisel	14250	
16S4-44	1-3/4"	1/2"	Brite	Chisel	11400	BOSTITCH®
16S4-44GAL	1-3/4"	1/2"	Galvanized	Chisel	11400	650S4
16\$4-50	2"	1/2"	Brite	Chisel	11400	
16S4-50GAL	2"	1/2"	Galvanized	Chisel	11400	

# 16-Gauge 7/16" Crown Construction Staples

SKU #	SIZE	CROWN	FINISH	POINT	QTY.	FITS
16S5-44	1-3/4"	7/16"	Brite	Chisel	19800	
16S5-44GAL	1-3/4"	7/16"	Galvanized	Chisel	16500	<b>BOSTITCH</b> ® 438S5, 538S5,
16\$5-50	2"	7/16"	Brite	Chisel	16500	650S5, 651S5, T40S5, T50S5
16S5-50GAL	2"	7/16"	Galvanized	Chisel	16500	14000, 13000

# BTA700 Series Heavy Duty Staples

SKU#	LEG LENGTH	CROWN WIDTH	POINT TYPE	QUANTITY	FITS
BTA704TLS	1/4"	3/8"	Chisel	1500	BOSTITCH®
BTHT73529	1/4"	3/8"	Chisel	1250	BT110, BT160HL, BHT150, BTFP71875
BTA705TLS	5/16"	3/8"	Chisel	1500	
BTHT73530	5/16"	3/8"	Chisel	1250	<b>BOSTITCH</b> ® BT110, BT160HL, BHT150, BHT250,
BTA706TLS	3/8"	3/8"	Chisel	1500	BTFP71875
BTHT73531	3/8"	3/8"	Chisel	1250	
BTA708TLS	1/2"	3/8"	Chisel	1500	BOSTITCH®
BTHT73532	1/2"	3/8"	Chisel	1250	BT110, BT160HL, BHT250, BTFP71875
BTA709TLS	9/16"	3/8"	Chisel	1500	BOSTITCH®
BTHT73533	9/16"	3/8"	Chisel	1250	BT110, BT160HL, BTFP71875

# **FASTENERS**

# **STAPLES**

# ☐ Heavy-Duty PowerCrown™ Staples

SKU#	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
STCR50191/4-1M	.050" x .019"	7/16"	1/4"	1000	
STCR50191/4-6M	.050" x .019"	7/16"	1/4"	6000	BOSTITCH®
STCR50195/16-5M	.050" x .019"	7/16"	5/16"	5000	T6-8, T6-80C1, PC4000, PC40000C1,
STCR50193/8-1M	.050" x .019"	7/16"	3/8"	1000	PC5000, H30-8, P6C-8, US056-1
STCR50193/8-5M	.050" x .019"	7/16"	3/8"	5000	
STCR50191/2-1M	.050" x .019"	7/16"	1/2"	1000	<b>BOSTITCH®</b> T6-8, T6-80C2, PC3000, PC4000, PC40000C2, PC5000, PC3000, US056-1
STCR50191/2-4M	.050" x .019"	7/16"	1/2"	4000	<b>BOSTITCH</b> ® T6-8, T6-80C2, PC4000, PC40000C2, PC5000, US056-1
STCR50199/16-1M	.050" x .019"	7/16"	9/16"	1000	BOSTITCH®
STCR50199/16-4M	.050" x .019"	7/16"	9/16"	4000	T6-8, T6-80C2, USO56-1, PC4000, PC4000C2

# Light-Duty PowerCrown™ Staples

SKU#	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
STCR26191/4	.026" x .019"	7/16"	1/4"	5000	
STCR26195/16	.026" x .019"	7/16"	5/16"	5000	<b>BOSTITCH</b> ® T5-6, H30-6, P6C-6
STCR26193/8	.026" x .019"	7/16"	3/8"	5000	13 0, 1130 0, 1 00 0
STCR26191/2	.026" x .019"	7/16"	1/2"	5000	T5-6, PC30000C2, T6-60C2

# **Light-Wire Staples**

SKU#	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
SP191/4	.019"	3/8"	1/4"	5000	P3-IND, P3-Chrome

# **Collated Rings**

SKU#	FINISH	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
RING616G50	Galvanized	16-Gauge		11/16"	2500	BOSTITCH®
RING616SS50	Stainless Steel	16-Gauge		11/16"	2500	P7

ALWAYS WEAR SAFETY GOGGLES

# **BOSTITCH**

www.BOSTITCH.com

# **BOSTITCH**

701 E. Joppa Rd, Towson, MD 21286 Customer Service 1-800-556-6696 Fax 1-800-842-9360

(R)



Smart Point™ Nailers



# Smart Point<sup>TM</sup> Technology

# **Improves Visibility\***



Easy to see where nail is driven

# **Reaches Tight Spaces**



80% smaller nose than current BOSTITCH nailers

# Reduces Work Surface Damage



No need to push against work to actuate tool

### **Smart Point™**Additional Features

### **Maintenance Free & Protection**



Oil-free operation requires no oil be added to the nailer



Front & side bumpers

### **Ease of Use**



**Tool-free jam release** 



Selectable trigger



**Rear exhaust** 



Dial-a-Depth® control



Tool-free adjustable belt hook



15 GA Nailers Only: air blower and 16" on-center gauge



### **Smart Point™ Line-up**











Engine Type	Oil-Free Oil-Free	
Operation Pressure Range	70-120 PSI (4.9 to 8.43kg/cm²)	70-120 PSI (4.9 to 8.43kg/cm²)
Maximum Operation Pressure	120 PSI (8.43kg/cm²)	120 PSI (8.43kg/cm²)
Fastener Type	BT13XX Series	SB16 Series
Fastener Range	5/8" - 2-1/8" (15mm - 55mm)	1-1/4" - 2-1/2" (32mm - 63mm)
Magazine Capacity	100	100
Length	11.3" (287mm)	12.5" (316.6mm)
Width	3.2" (81mm)	3.33" (84.1mm)
Height	9.5" (241mm)	11.31" (288.5mm)
Weight	3.1 lbs. (1.4 kg) 3.9 lbs. (1.7 kg)	
UPC	077914058991	077914059004
Kit Includes	Nailer, Carrying Case, Sample Fasteners, 1/4" Fitting, 3 No-Mar Tips & Belt Hook with Pencil Sharpener	Nailer, Carrying Case, Sample Fasteners, 1/4" Fitting, 3 No-Mar Tips & Belt Hook with Pencil Sharpener









Engine Type	Oil-Free	Oil-Free
Operation Pressure Range	70-120 PSI (4.9 to 8.43kg/cm²)	70-120 PSI (4.9 to 8.43kg/cm²)
Maximum Operation Pressure	120 PSI (8.43kg/cm²)	120 PSI (8.43kg/cm²)
Fastener Type	DA15 Series	FN15 Series
Fastener Range	1-1/4" - 2-1/2" (31mm - 63mm)	1-1/4" - 2-1/2" (31mm - 63mm)
Magazine Capacity 100		129
Length	12.8" (325mm)	14.3" (363mm)
Width	3.8" (97mm)	3.8" (97mm)
Height	12.1" (307mm)	12.1" (307mm)
Weight	4.22 lbs. (1.9 kg) 4.32 lbs. (2.0 kg)	
UPC	077914060413	077914060420
Kit Includes	Nailer, Carrying Case, Sample Fasteners, 1/4" Fitting, 3 No-Mar Tips, Belt Hook & Pencil Sharpener	Nailer, Carrying Case, Sample Fasteners, 1/4" Fitting, 3 No-Mar Tips, Belt Hook & Pencil Sharpener

### **Rebuild Kits**

Parent Tool	Rebuild Kit	Trigger Valve Kit
BTFP12233 (Smart Point™ 18 GA Brad Nailer)	BT55/SX38-RK	TVA18
BTFP71917 (Smart Point™ 16 GA Finish Nailer)	FN1664-RK	TVA17
BTFP72155 (Smart Point™ 15 GA "DA" Style Finish Nailer)	DA1564K-RK	TVA17
BTFP72156 (Smart Point™ 15 GA "FN" Style Finish Nailer)	N62FNB-RK	TVA17

### **Compatible Fasteners**

18 GA Straight Brad Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
BT1300B-1M	5/8"	Chisel	Coated	1000	
BT1300B	5/8"	Chisel	Coated	3000	
BT1303B-1M	3/4"	Chisel	Coated	1000	
BT1303B	3/4"	Chisel	Coated	3000	
BT1309B-1M	1"	Chisel	Coated	1000	BOSTITCH®
BT1309B	1"	Chisel	Coated	3000	GBT1850K, SB-1850BN,
BT1314B-1M	1-3/16"	Chisel	Coated	1000	SB-2IN1, BT125K-2, BT200K-2, BT1855K,
BT1314B	1-3/16"	Chisel	Coated	3000	BTFP71875
BT1332B-1M	1-1/4"	Chisel	Coated	1000	
BT1332SS	1-1/4"	Chisel	Stainless	500	
BT1335B-1M	1-3/8"	Chisel	Coated	1000	
BT1335B	1-3/8"	Chisel	Coated	3000	
BT1338B-1M	1-1/2"	Chisel	Coated	1000	
BT1338B	1-1/2"	Chisel	Coated	2000	
BT1340B	1-9/16"	Chisel	Coated	2000	
BT1342B-1M	1-5/8"	Chisel	Coated	1000	BOSTITCH®
BT1345B-1M	1-3/4"	Chisel	Coated	1000	GBT1850K, SB-1850BN, SB-2IN1, BT200K-2,
BT1345B	1-3/4"	Chisel	Coated	2000	BT1855K
BT1350B-1M	2"	Chisel	Coated	1000	
BT1350SS	2"	Chisel	Stainless	500	
BT1350B	2"	Chisel	Coated	2000	

16 GA Straight Finish Nails



SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
SB16-1.25-1M	1-1/4"	Chisel	Coated	1000	
SB16-1.5-1M	1-1/2"	Chisel	Coated	1000	
SB1615SS	1-1/2"	Chisel	Stainless	500	
SB16-1.50	1-1/2"	Chisel	Coated	2500	
SB16-1.75-1M	1-3/4"	Chisel	Coated	1000	BOSTITCH®
SB16-2.00-1M	2"	Chisel	Coated	1000	GFN1664K, FN16250K,
SB1620SS	2"	Chisel	Stainless	500	SB-1664FN, FN1664K
SB16-2.00	2"	Chisel	Coated	2500	
SB16-2.5-1M	2-1/2"	Chisel	Coated	1000	
SB1625SS	2-1/2"	Chisel	Stainless	500	
SB16-2.50	2-1/2"	Chisel	Coated	2500	

15 GA "FN" Style Angled Finish Nails

"	SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
d	FN1520-1M	1-1/4"	Chisel	Coated	1000	
s	FN1520	1-1/4"	Chisel	Coated	3655	
'n	FN1524-1M	1-1/2"	Chisel	Coated	1000	
	FN1524-1MSS	1-1/2"	Chisel	Stainless	1000	
I	FN1524	1-1/2"	Chisel	Coated	3655	
J	FN1528	1-3/4"	Chisel	Coated	3655	BOSTITCH®
	FN1532-1M	2"	Chisel	Coated	1000	GFN1564K, N59FN,
	FN1532-1MSS	2"	Chisel	Stainless	1000	N60FN, N62FN
	FN1532	2"	Chisel	Coated	3655	
	FN1536	2-1/4"	Chisel	Coated	3655	
	FN1540-1M	2-1/2"	Chisel	Coated	1000	
	FN1540-1MSS	2-1/2"	Chisel	Stainless	1000	
	FN1540	2-1/2"	Chisel	Coated	3655	
	FITS MOST OTHER 15 GA "FN" STYLE ANGLED FINISH NAILERS					

15 GA "DA" Style Angled Finish Nails

SKU#	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
DA-1520	1-1/4"	Chisel	Coated	4000	
DA-1524	1-1/2"	Chisel	Coated	4000	BOSTITCH®
DA-1532	2"	Chisel	Coated	4000	DA1564K
DA-1540	2-1/2"	Chisel	Coated	4000	
FITS MOST OTHER 15 GA "DA" STYLE ANGLED FINISH NAILERS					

### Watch and Learn

### Family launch video



http://youtu.be/gVnr-9D3Y\_Q

### **Testimonial Video**



http://youtu.be/ESC8IP5F\_a0

### **Product Overviews**



15 GA Features and Benefits http://player.theplatform.com/p/ rDn80C/KEwV0h\_S\_HFY/select/ l9tKA5Lvxm6J



16 GA Features and Benefits http://player.theplatform.com/p/ rDn80C/KEwV0h\_S\_HFY/select/ FsVYWpS8BwjR



18 GA Features and Benefits http://player.theplatform.com/p/ rDn80C/KEwV0h\_S\_HFY/select/ I4KgMhAn05gr









### **AutoFeed Fasteners**

PAMFast AutoFeed Fasteners are designed for a variety of wood and steel frame applications. Each fastener is engineered to deliver speed, ease, and strength benefits.

### **PAMDrive Bit System**

- PAMDrive is a tapered, 12-lobe drive system that eliminates bit stripping and cam-outs
- PAMDrive delivers solid bit engagement, resulting in much longer bit life and a smoother overall drive





### TORX® ttap® Drive System\*

- Strip-out resistant #20 TORX® ttap® drive system offers stick-fit wobble free installation
- TORX® ttap® drive system eliminates strip-out during installation or removal
- \* Available only in TrapEase 3

### Distributed by: BEST MATERIALS ®

Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014 www.BestMaterials.com Email: Sales@BestMaterials.com



### SubFloor

PAMFast SubFloor screws are designed for traditional OSB and Plywood subfloors

- Fast thread design drives up to 43% faster
- PAMDrive recess eliminates bit grinding and cam-outs
- Available in 11/4" 3" lengths





### TrapEase® 3

PAMFast TrapEase 3 screws are designed for AZEK PVC decking, Trex Transcend, and Trex Select

- Available in Gray, Brown, Dark Brown, and Red to match leading board colors
- TORX® ttap® drive system eliminates bit grinding and cam-outs
- Available in 2½" length





### Drywall Wood Studs

PAMFast DryWall screws are designed for attaching drywall panels to wood studs

- Thread design ensures quick penetration into wood studs
- Standard #2 Phillips drive recess
- Available in 1¼" 2½" lengths





### SubFloor High Density

PAMFast High Density SubFloor screws are designed for AdvanTech® subfloors

- Unique design ensures correct fastening in high density panels
- PAMDrive recess eliminates bit grinding and cam-outs
- Available in 1¾" and 2" lengths





### **CementBoard**

PAMFast Cement Board screws are designed for cement board underlayment.

- Thread design and modified wafer head deliver consistent countersink and holding power
- PAMDrive recess eliminates bit grinding and cam-outs
- Available in 1½""and 15%" lengths





### **Drywall** Steel Studs

PAMFast DryWall screws are designed for attaching drywall panels to steel studs.

- Thread design ensures quick penetration into steel studs
- Standard #2 Phillips drive recess
- Available in 1¼" and 15%" lengths






### CopperHead

PAMFast CopperHead screws are designed for pressure treated lumber decking

- X-Point design and CopperHead coating eliminate splitting and corrosion
- PAMDrive recess eliminates bit grinding and cam-outs
- Available in 1¾" 3" lengths





### **RoofTile**

PAMFast RoofTile screws are designed for attaching roof tiles to wood substrates.

- Miami-Dade approved Corrosion-resistant for the life of the project
- PAMDrive recess eliminates bit grinding and cam-outs
- Available in 2½" and 3" lengths





Packaged in Boxes of 1000 with 50 screws per strip. 6 boxes per Master Case. For a complete listing of offerings please visit www.FastenMaster.com or call 800·518·3569

**BUY HERE NOW:** 

http://www.bestmaterials.com/SearchResult.aspx?Manufacturer=132



One Tool. Multiple Uses.



The system is designed for installing wood subfloors, pressure treated and composite decking, drywall, cement board, and much more.

P13KDE Kit: Includes system with extension pole only

P13KUE Kit: Includes system with extension pole and adapter for handheld use

One Tool. Multiple Uses.



### **FastenMaster. PAMFast**


### One Tool. Multiple Uses.







Drywall





Decking & More!

### Follow FastenMaster and share your story!



www.Facebook.com/FastenMaster



www.Twitter.com/FastenMasterPro



www.youtube.com/FastenMaster1



www.Instagram.com/FastenMasterPro



### Become a FastenMaster PROStar



- Monthly eNews
- The latest products • The best practices
- Exclusive offers

Join FastenMaster's community of Pro Contractors: www.fastenmaster.com/prostar-signup.html

### See our latest products in action

Scan to view a PAMFast AutoFeed installation video



FastenMaster® and PAMFast™ are trademarks of OMG Inc. Copyright © 2016 OMG Inc. All rights reserved. 153 Bowles Road, Agawam, MA 01001 800-518-3569 www.FastenMaster.com

**PAMFast**<sup>\*\*</sup> AutoFeed System and Fastener Guide

### **PAMFast drives productivity**

The PAMFast AutoFeed System is engineered to be smooth, fast and easy for the professional contractor. Its simple but rugged design is built to last and delivers smooth, consistent driving every time!

PAMFast can be used while standing or as a handheld system thanks to its removable extension pole design. This enables faster installation and eliminates the hassle of loose screws.

PAMFast drives short screws ( $\frac{3}{4}$ " – 3") in a wide range of wood and steel frame construction.



### Features:

- Smooth: No Jams and No stripping out bits
- Fast: 50 screws per strip = less reloading
- Easy: Adjust screw length, countersink depth, then drive!
- Dependable: Built for speed, versatility, and heavy use
- Can be used while standing or as a handheld system
- Extension pole is removable.

**PAMFast**\*\* AutoFeed System



### P13KDE



### **Decking & Subflooring**

1"-3" Fasteners | 6.5 Amps | 2500 RPM | 140 mm Bit

### P13KUE



### **Decking & Subflooring**

1"- 3" Fasteners | 6.5 Amps | 2500 RPM | 140 mm Bit

Can be used with or without the extension

### **PAM Autofeed Screwdriving Systems**

### **Versatile Tools**

PAM Fastening sells a variety of extensions that fit most popular motors. Contact PAM for a complete list of available tools to fit your needs.





The PAM Professional Autofeed Screw System is Available from your Authorized Distributer:







### **Contractor-Tough Tools**

### **PAM's Professional Autofeed Screw System**

- Increases productivity and improves quality
- Fast, precise and repeatable depth control
- Most consistent countersink in the industry
- PAM's P13 Series handles #6 to #12 screws 1" to 3" in length with a single nose piece.

### **PC-12 CORDLESS**



Drywall & Assembly

1"-2" Fasteners | 14.4V | 4000 RPM | 154 mm Bit

P13K / P13K4



Distributed by: BEST MATERIALS ® LLC Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014 www.BestMaterials.com Email: Sales@BestMaterials.com

PROFESSIONAL AUTOFEED SCREWDRIVING SYSTEMS

**TOOLS & FASTENERS** 



1"-3" Fasteners | 6.5 Amps | 2500/4000 RPM | 140 mm Bit



### **Wood to Wood**

PROGRAMMA.

PAMDrive, <sup>2</sup>/<sub>3</sub> Coarse Thread, Clear Zinc or Yellow Zinc

Programme .		
#10 x 1 1/4"	Flat Head	WDCZ1014
ARRIVATA A	leksk-	
#8 x 1 1/4"	Flat Head	WCYZ8114
#8 x 1 1/2"	Flat Head	WCYZ8112
20000000	1000-	
#8 x 1 3/4"	Flat Head	WCYZ8134F
#8 x 2"	Flat Head	WCYZ8200F
#8 x 2 1/2"	Flat Head	WCYZ8212F
#8 x 3"	Flat Head	WCYZ8300

### High Density Wood (Advantech) to Wood **PAMDrive, Full Coarse Thread, Yellow Zinc** A STATE OF THE PARTY OF THE PAR

#8 x 1 3/4"	Flat Head	FDYZ8134
#8 x 2"	Flat Head	FDYZ8200

### **♦** Wood to Wood Underlayment #2 Philips Drive, Hi-Lo Thread, Black Phosphate

#7 x 1"	Modified Trim Head with Nibs	MTH710
#7 x 1 1/4"	Modified Trim Head with Nibs	MTH7114

### **CEMENT FIBER BOARD/SIDING TO WOOD**

### ☼ Cement Fiber board/Siding to Wood

**M** PAMDrive, Coarse Thread, Magni,

Copperhead

#8 x 1 1/4"	Modified Wafer Head with Flutes	MWMC8114
#8 x 1 5/8"	Modified Wafer Head with Flutes	MWMC8158

### **EXTERIOR DECKING SCREWS**

Flat Head

WCCH8134

WDCH8200

WDCH8212

WDCH8300

THCH8212

WDSS8134

WDSS8200

WDSS8212

WDSS10212

WDSS1003

### **ROOF TILE SCREWS**

WTDC8212

WTDC8300

WDDC8212

### **DRYWALL TO STEEL SCREWS**

### **Roofing Tile to Wood**

#8 x 3"

#8 x 2 1/2"

**√ACQ** PAMDrive, <sup>2</sup>/<sub>3</sub> Coarse Thread, Dacro, Stainless Steel or Copperhead

~	Соррением	-
	ALLEA A	uuuu
	#8 x 2 1/2"	Bugle Head

**Applications** 

#8 x 1 3/4"	Bugle Head	WDSS8134		
#8 x 2 1/2"	Bugle Head	WDSB8212		

**Bugle Head** 

### ♠ Drywall to 18-22 Gauge Steel #2 Phillips Drive, Fine Thread, Black Phosphate

#6 x 1 1/4"	Bugle Head	GFBP611
#6 x 1 5/8"	Bugle Head	GFBP615
#6 x 2"	Bugle Head	GFBP620

### ♠ Drywall to 16-18 Gauge Steel #2 Phillips Drive, Self Drill, Clear Zinc

#6 x 1 1/4"	Bugle Head	SDCZ6114
#6 x 1 5/8"	Bugle Head	SDCZ6158

### **WOOD/STEEL TO STEEL SCREWS**

Steel to Steel Framing **PAMDrive, Self Drill, Clear Zinc** 

#10-18 x 3/4"	Pan Head	SD101834
#12-18 x <sup>3</sup> / <sub>4</sub> "	Pan Head	SD121834

Wood to 14-18 Gauge Steel Subfloor **PAMDrive, Full Fine Thread, Clear Zinc** 

#0 1 1/ //	CDC70112	
#8 x 1 1/2"	Flat Head	SPCZ8112
#8 x 2"	Flat Head	SPCZ8200
THE REAL PROPERTY OF THE PERSON NAMED IN COLUMN TO THE PERSON NAME		
#8 x 2"	Flat Head	SDCZ8200

Wood to 10-14 Gauge Steel



Wood to 6-10 Gauge Steel PAMDrive, Self Drill with Wings, Forged Tip, Clear Zinc

#12 x 2"	Flat Head	SDWT12200	
#12 x 2 1/2"	Flat Head	SDWT12212	

### **CEMENT FIBER BOARD/SIDING TO STEEL**

**Cement Fiber board/Siding to Steel** 

√acq PAMDrive, Self Drill with Wings,



( <b>1</b> ¹/4"	Modified	Wafer	Head	with	Flute
<b>( 1</b> ⁵/8″	Modified	Wafer	Head	with	Flute

### CHMW8114 CHMW8158

### #10 x 3" Flat Head - 316 SS Ipe Wood

Copperhead

#8 x 1 3/4"

#8 x 2 1/2"

#8 x 2 1/2"

#8 x 1 3/4"

#8 x 2 1/2"

#10 x 2 1/2"

#8 x 2"

#8 x 2"

#8 x 3"

PAMDrive, 2/3 coarse thread, Stainless Steel

Flat Head - 316 SS

	Hall to the second	
#10 x 2 1/2"	Flat head with nibs Type 17 point	IPESS10212

### Plastic to Wood

**PAMDrive, Full Coarse Thread, Stainless Steel or** 

Copperhead THE REAL PROPERTY.

4		
#8 x 1"	Modified Pan Head with Washer	PHCH8100
#8 x 1"	Modified Pan Head with Washer	PHSS8100

### Composite

PAMDrive, Dual Thread, Brown, Gray, Tan, Red or Stainless Steel

	MANAGOS-	
#10 x 2 1/2"	Flat Head	CDS10212B
#10 x 2 1/2"	Flat Head	CDS10212G
#10 x 2 1/2"	Flat Head	CDS10212T
#10 x 2 1/2"	Flat Head	CDS10212R
#10 x 2 1/2"	Flat Head	CDS10212S
#10 x 3"	Flat Head	CDS10300B
#10 x 3"	Flat Head	CDS10300G
#10 x 3"	Flat Head	CDS10300T
#10 x 3"	Flat Head	CDS10300R
#10 x 3"	Flat Head	CDS10300S

### **DRYWALL TO WOOD SCREWS**

•	Drywall to Wood
	#2 Phillips Drive, Coarse Thread, Black Phosphate

	dydydys-		
#6 x 1 1/8"	Bugle Head	GCBP6118	
#6 x 1 1/4"	Bugle Head	GCBP6114	
#6 x 1 5/8"	Bugle Head	GCBP6158	
#7 x 2"	Bugle Head	GCBP7200	

PAMDrive

**Phillips Drive** 

Copperhead Screws\*

\* Copperhead screws compatible with ACQ, CBA-A, and CA-B treated lumber

**√ACQ** ACQ Tolerant Please check with your dealer for additional fasteners.



All fasteners are NOT shown.

FRAME

**STEEL FRAME** 



#8 x



Mani

Fuel Pail
Combo Packs

CF325 Cordless Framing Nailer

### **CF325 Cordless Framing Nailer**

### BETTER, FASTER STRONGER

**Redesigned Nose** Toe-nailing at any angle







Lasts 5x Longer\* 50,000 shots before cleaning!

\*As compared to

previous model.



### **SAVE TIME AND MONEY!**



### Never run out of fuel

Enough fuel to drive more than 1,000 nails, guaranteed!


Each Fuel + Nail Combo Pack includes 1 fuel cell and 1,000 Paslode nails or 3,000 nails and 3 fuel cells.

### No-step design

No snapping. No twisting. Just drop-in and go!

### Extended fuel cell life-21months!

Maximizes the number of shots per cartridge.



Redesigned Nos Toe nailing at any an

Heavy-Duty Utili Rotates to hang on ra

Soft Grip Handle

Provides comfort and


Easy to Open Fil Allows for more conv

Rugged Carrying Cas Rechargeable Batter with Charger

Model CF325 Nail Capacity: 1 strip + 5 nails





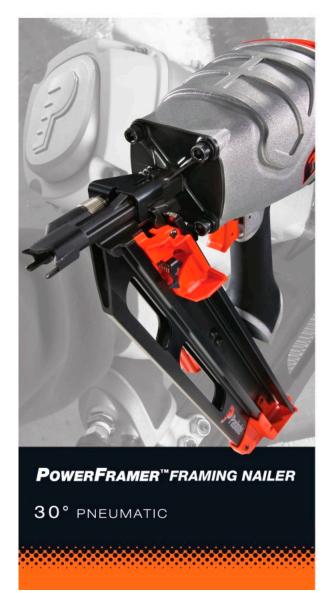

### PowerFramer™Framing I

### Powerful.

Sinks every nail. Every time.

Powerful enough to nail LVL headers and beams.

Gets the job done the first time,
no more manual nailing.



### Light Weight.

Less arm fatigue. Work faster.

Compact design for more balance and control.

Easy on the wrist!



### Durable.

Reliable performance. Minimum service.

**New** rugged design performs after a 2-story drop! Guaranteed service-free for one year!





# THERE'S A REASON THEY — call it "building" — A REPUTATION.



Notes	
	Paslode Paslode
	30





### **TABLE OF CONTENTS**

Tools at a Glance	P 4
Cordless Impulse XP Framing Nailer	P 8
PowerMaster Plus Framing Nailer	P 10
Compact Framing Nailer	P 11
PowerMaster Plus 4" Framing Nailer	P 12
S200-S16 Framing Air Stapler	P 14
S200-W16 Insulation Sheathing Stapler	P 15
IMLi200 18 Gauge Brad Nailer	P 16
IMLi250 16 Gauge Finish Nailer	P 17
16 Gauge Straight Finish Air Stapler	P 18
18 Gauge Brad Nailer	P 20
18 Gauge Brad Nailer/Stapler	P 21
18 Gauge Narrow Soffit Stapler	P 23
18 Gauge Narrow Crown Finisher Stapler	P 24
US-100 Upholstery/Craft Stapler	P 25
HP-100 Headless Pin Nailer	P 26
20 Gauge Hammer Stapler	P 27
FloorMaster Plus™	P 28
Miscellaneous Factoners	D 30

### **TOOL**

### **DESCRIPTION**

### **APPLICATIONS**



### **CORDLESS IMPULSE XP** 30°FRAMING NAILER

Drive 1200 nails per fuel cell Drive 9000 nails per battery charge Proven for over 25 years Durable. Lightweight. Balanced.

Weight: 7.2 lbs Height: 14-1/2" Length: 12" Nail Capacity: 40 Range: 2" - 3-1/4" Shank: .113 - .131

FRAMING, JOISTS, RAFTERS, SOFFITS, STAIRS, SHEATHING, CRATING, FENCES AND DECKS

**DESIGNED FOR:** FRAMERS & RENOVATORS

FRAMING, JOISTS,

RAFTERS, SOFFITS,

STAIRS, SHEATHING,

CRATING, FENCES

AND DECKS

### PART#: 905800

### F350-S POWER MASTER+™

**Durable construction requires** less maintenance.

Proven performer for tough job site work with less jams or misfires

Powerful. Enduring. Reliable.

Weight: 8.4 lbs Height: 13-3/10" Lenath: 18"

Nail Capacity: (2 strips) 84 Range: 2" - 3-1/2" Shank: .113 - .131

> **DESIGNED FOR:** PROFESSIONAL FRAMERS



### PART #: 501000

### F325R COMPACT FRAMER™

Lightest-framing nailer ever (Only 5.9 lbs) **Smallest Framer Ever** (Only 12' long) **Remodel interiors easier** Compact. Lightweight

Weight: 5.9 lbs Height: 12-9/10" Length: 12-3/10" Range: 2" – 3-1/4" Shank: .113 - .131 Magagine Capacity: 44

FRAMING, JOISTS, RAFTERS, SOFFITS, STAIRS, SHEATHING, CRATING, FENCES AND DECKS

**DESIGNED FOR:** PROFESSIONAL RENOVATORS



PART #:

### 513000

### **PSN100.1 – 4" FRAMING NAILER 30°**

Designed to drive 4" nails Powerful to drive into engineered lumber Powerful. Fast. Durable.

Weight: 8.9 lbs Height: 14-1/2" Length: 19" Nail Capacity: 84 Range: 2" - 4"

Shank: .113 - .131

LSL, LVL, PSL, AND OSB, **ENGINEERED LUMER FOR FRAMING** 

**DESIGNED FOR: PROFESSIONAL FRAMERS** 



502900

(see page P 12 for more details)

# (see page P 14 for more details)

### S200 S16P – 16GA. FRAMING AIR STAPLER

**TOOL** 

Heavy duty. Lightweight. Versatile Weight: 4.9 lbs Height: 10-3/4" Length: 12-3/4" Staple Capacity: 150

Range: 3/4" — 2" Staple Type: 1/2" crown GS16

**DESCRIPTION** 

ROOF SHEATHING, PLYWOOD SHEATHING, VINYL SIDING (WITH ATTACHMENT)

**APPLICATIONS** 

PART #: 501230



Weight: 4.9 lbs Height: 10-3/4" Length: 12-3/4" Staple Capacity: 150 Range: 3/4" — 2"

Staple Type: 15/16" Crown

HOUSEWRAP, INSULATION, WIRE LATH AND SHEATHING

(see page P 15 for more details)

### PART #: 501265



IMLi200 – 18GA. BRAD NAILER

Drive 12,000 nails per battery charge Proven for over 25 years Durable. Lightweight. Balanced.

Drive 1200 nails per fuel cell

Weight: 4.5 lbs Height: 11-1/2" Length: 11" Nail Capacity: 100 Range: 3/4" - 2" Shank: 18 Gauge

Weight: 4.6 lbs

Height: 11-3/4"

Length: 10-1/2"

Nail Capacity: 100

Range: 1-1/4" - 2-1/2"

Shank: 16 ga. Straight

CROWN,
BASEBOARD MOULDINGS,
PANELLING
AND CARPENTRY

PART #: 903700



IMLi250 16GA. STRAIGHT FINISH NAILER

Drive 1200 nails per fuel cell Drive 12,000 nails per battery charge

Proven for over 25 years
Durable. Lightweight. Balanced.

DOOR AND WINDOW TRIM, CASING, CROWN AND BASEBOARD MOULDING

PART #: 903800

# CORDLES

### **TOOL DESCRIPTION APPLICATIONS** T250S F16 - 16GA. Weight: 3.90 lbs WINDOW AND DOOR **FINISH NAILER** Height: 10" TRIM/FINISH Length: 10-3/4" Adjustable depth of drive APPLICATIONS, PANELLING Nail Capacity: 100 **Ergonomic design** AND CABINETRY Range: 3/4" - 2-1/2"Lightweight Nail Type: 16 ga. (see page P 18 for more details) PART #: 502140 Weight: 2.9 lbs. P18-200 18 GA. WINDOWS, DOORS, Height: 9-1/2" **BRAD NAILER FURNITURE, TRIM** Lenath: 10-1/4" Lightweight and well balanced **APPLICATIONS** Nail Capacity: 100 No mar tip Range: 5/8" - 2" Easy to access corners Nail Type: 18 ga. – Smooth, Galvanized Type: 18 ga. (see page P 20 for more details) PART#: P18-200 P18-FS200 18 GA. Weight: 2.9 lbs. WINDOWS, DOORS, Height: 9-1/2" **BRAD NAILER/STAPLER FURNITURE, TRIM** Length: 10-1/4" Lightweight and well balanced **APPLICATIONS** Nail Capacity: 100 No mar tip Range: 5/8" - 2" brad nails Easy to access corners and 5/8" - 1-1/2" staples (3/16" crown) Type: 18 ga. & 3/16 (see page P 21 for more details) PART#: P18-FS200 N18-125 - 1-1/4" Weight: 2.5 lbs. TRIM/FINISH, PLYWOOD, Height: 9" **NARROW SOFFIT STAPLER** SOFFITS/FACIAS, Length: 9-1/4" Specifically designed for soffit UNDERLAYMENT Staple Capacity: 100 installation with long narrow **APPLICATIONS** Range: 3/4" - 1 1/4" nosepiece for tight spots. Staple Type: 3/16" crown GSN18 N18-125 (see page P 23 for more details) PART #: N18 150 - 1-1/2" Weight: 2.8 lbs. TRIM/FINISH, PLYWOOD, Height: 9-3/4" NARROW CROWN SOFFITS/FASCIAS. Length: 11-1/2" **FINISH STAPLER** UNDERLAYMENT Staple Capacity: 100 **Heavy Duty for long life APPLICATIONS** Range: 3/4" - 1 1/2" 4000 Shots per batt. charge Staple Type: 3/16" crown GSN18

(see page P 24 for more details)

PART #:

N18-150

		TOOL	DESCRIPTION	<b>APPLICATIONS</b>
LERS		US-100 — UPHOLSTERY/ CRAFT STAPLER Easy load magazine 5 Staples/second	Weight: 2.00 lbs. Height: 9-1/2" Length: 12-1/2" Staple Capacity: 100 Range: 3/8" — 9/16" Staple Type: 22 ga. Upholstery	UPHOLSTERY, CRAFTS, LIGHT PANELING AND HOME PROJECT APPLICATIONS
IAP	(see page P 25 for more details)	PART #: US-100		
LITE GAUGE FASTENING STAPLERS		23GA HEADLESS PIN NAILER Lightweight and compact No mar tip and nail lock out	Weight: 1.20 lbs. Height: 9-1/4" Length: 7-3/4" Staple Capacity: 100 Range: 1/2" — 1-1/2" Staple Type: 23 ga.	FINE WOODWORKING AND TRIM WORK
) NG	(see page P 26 for more details)	PART #: HP100		
LITE G/	(see page P 27 for more details)	HT550 — 20GA. HAMMER STAPLER Heavy duty, durable, quick clear jam, durable construction  PART #: 1013292	Weight: 2.0 lbs Height: 3-1/4" Length: 11-3/4" Staple Capacity: 168 Crown: 1/2" Staple Length: 5/32" — 5/16" Staple Type: 20 ga. 1/2" crown	CARPET PADDING, INSULATION, ROOF PAPER, HOUSE WRAP
		FLOORMASTER PLUS™	Weight: 10.4 lbs	3/4" HARDWOOD FLOORING
FLOORING		2 IN 1 FLOORING NAILER/ STAPLER Drives staples and cleats to meet flooring manufacturers fastening specifications	Weight: 10.4 lbs Height: 18" Length: 16" Flooring Fasteners: 15ga staples & 16ga L-cleats Fastener Lengths: 2", 1-3/4, 1-1/2"	5/4 HARDWOOD FLOOKING

F2N1-200

PART #:

(see page P 28 for more details)



IM325XP Cordless Impulse XP Framing Nailer

Portable freedom on the jobsite without hoses or compressors



### **INCLUDES**

Cordless Li-ion Framing Nailer, Model IM325XP

Rechargeable 7.4V Li-ion battery

Li-ion battery charger

Rugged carrying case

Owner's manual

Safety glasses

5/32" Hex Wrench

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### **Cordless Impulse XP Framing Nailer—**

### IT'S MORE THAN A NAILER, IT'S A NAILING SYSTEM THAT GETS THE JOB DONE RIGHT.

The Paslode Lithium Ion cordless Impulse nailer has provided framers and renovators the ability to wood frame without air hoses for over 25 years. New Li-ion battery technology drives 50% more nails per charge. 2-times faster charge time; 2 minute quick charge drives up to 200 nails. Tool free depth of drive adjustment, non slip grip, dual position utility hook, sequential operation triggers.

LIGHTWEIGHT



**EASY ACCESS** 







### **ADVANTAGES**

- Portable, freedom on the jobsite without hoses or compressors
- Heavy-duty rafter/belt hook for taking jobsite
- Non-slip grip provides comfort and reduces hand fatigue
- Tool free depth-of-drive nail adjustment changes nail depth in an instant — even while wearing gloves
- Nail lockout feature prevents blank driving

- Compact size fits between 16" o.c. studs, joists and roof trusses
- Li-ion battery provides 50% longer run time (up to 9,000 nails per charge) than NiCd battery
- 1-hour Full Charge; 2-minute Quick Charge for Up to 200 shots
- Lightweight 7.2 lbs. including battery for better comfort and control
- Works in cold temperature down to -10°C

### **SELECTION CHART**

### **Pro-Strip RounDrive Fuel/Nail Packs**

LENGTH	SHANK DIAMETER	SHANK TYPE	HEAD STYLE	COATING	PRODUCT NUMBER	NAILS PER PACK	FUEL CELLS PER PACK	
2-3/8"	0.113	Smooth	Roundrive	Brite	1238FN	1,000	1	
2-3/8"	0.113	Smooth	Roundrive	Brite	3238FN	3,000	3	
3"	0.120	Smooth	Roundrive	Brite	1300FN	1,000	1	
3"	0.120	Smooth	Roundrive	Brite	3300FN	3,000	3	
3-1/4"	0.120	Smooth	Roundrive	Brite	1325FN	1,000	1	
3-1/4"	0.120	Smooth	Roundrive	Brite	3325FN	3,000	3	

See Page P 13 for additional framing nails that work with this tool.

### **Cordless Impulse XP Framing Nailer**

### **APPLICATIONS**



Framing

Joists and rafters

Soffits

Stairs

Sheathing

Crating

Fences and decks

### **TOOL ACCESSORIES**



Part No. 902513 All Season Orange Fuel Cell



Part No. 902654C Li Ion Battery



Part No. 902667C Lithium Battery Charger



Part No. 901252 Cordless No mar tip



Part No. 401482 Impulse Oil



Part No. 219086 Degreaser

### **SPECIFICATIONS**

### Part No. 905800

Weight: 7.2 lbs

Height: 14-1/2"

Length: 12"

Width: 4"

Speed: 2-3 nails per second

Nail Capacity: 40

Range: 2" - 3-1/4"

Shank: .113 — .131

Nail Angle: 30°

Fuel Type: Spare Framing Fuel

Nails per Fuel Cell: Approximately 1200

Fuel life: 21 months from date of manufacture

Battery Life: 9000 nails per charge

Warranty: 1-year full warranty, 5-year limited warranty

### INSUL 2 WOOD



Part No. INSULPROBE Insul2Wood — Insulprobe



Part No. IFW-314 & IWF-238 Nail and Washer Combo - 3-1/4" & 2-3/8" with Galvanized Washers (1000/box)



Rigid installation



Applications
Semi-rigid Insulation



House wrap Fastening







# PF-350S PowerMaster Plus Framing

Durability, **Balance** and Versatility for all jobs



### **INCLUDES**

PowerMaster™ Plus Pneumatic Framing Nailer

Bump fire trigger

Hex wrench (on tool)

Safety glasses

Owner's manual

### TOOL ACCESSORIES



Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### **PowerMaster Plus Framing Nailer—**

### **DESIGNED FOR PROFESSIONAL FRAMERS**

Heavy-duty jobs require a heavy-duty nailer. That's why the pros turn to the proven performance, durability and driving power, only a Paslode pneumatic framing nailer can provide. When used with Paslode nails, this nailing system can help you drive jobs home on time, every time.

### **POWERFUL**



### **FAST**



### **DEPENDABLE**



### **ADVANTAGES**

- Frame full walls faster. Heavy duty power.
- Reliable performance that saves time with less maintenance.
  - Durable construction requires less maintenance.
  - Proven performer for tough job site work with less jams or misfires
  - Compact size fits between 16" o.c. studs, ioists and rafters.

- Soft grip handle for comfort
- Bolt-on end plug for easier service
- Depth of drive on the tool rather than the compressor saves time and energy
- Rafter hook, moves out of the way when not in need
- Adjustable air deflector cap

### APPLICATIONS



Framing

Joists and rafters

Crating

Sheathing

Soffits Stairs

Fences and decks

### SPECIFICATIONS

### Part No. 501000

Weight: 8.4 lbs

Height: 13-3/10"

Length: 18"

Speed: 12 nails per second\*, sequential or selectable operation

Op. Pres. p.s.i (bar): 90 - 120 (5.5 - 8.3)

Nail Capacity: 2 strips (up to 84) Nail Range: 2'' - 3.5'' in length, .113" - .131" shank diameters

Nail Angle: 30°

Nail Type: Paslode RounDrive®

Offset Full Head

Air Req./100p.s.i. (6.9 bar): .082/cycle

Op. Pres. p.s.i (bar): 80 - 120 (5.5 - 8.3)

Warranty: 90-day limited on wear parts, 1-year limited on magazine parts,

5-year limited on housing and cap parts





### F325R Compact Framing Nailer

### Lightest weight framer ever



SEE PAGE P 13 FOR FRAMING NAILS SELECTION CHART

### **INCLUDES**

Compact 30° Framing Nailer Safety glasses

Owner's manual

### **TOOL ACCESSORIES**







Part No. 219090

### Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### **Compact Framing Nailer—**

### **DESIGNED FOR RENOVATORS**

With this nailing system, you'll have any interior remodeling job done in no time. Get the access and maneuverability you need in tight spaces with this lightweight yet powerful pneumatic nailing system. When used with Paslode nails, this nailing system can help you drive jobs home on time, every time.

**PROFESSIONAL** 



LIGHTWEIGHT



**EASY ACCESS** 



### **ADVANTAGES**

- Remodel interiors easier. Lightest weight framer ever.
  - Remodel Interiors Easier
  - First pneumatic nailer made especially with remodeler's needs in mind
  - Fits easily into the tightest spaces such as between 16" o.c. studs
- Great maneuverability to work comfortably overhead
- Lightest-framing nailer ever made: 5.9 lbs
- Quick 2-step nail strip reload
- Soft grip handle for comfort
- Works in bump mode for speed on jobsite

### **APPLICATIONS**



Framing

Sheathing

Joists and rafters

Crating

Soffits

Stairs

Fences and decks

### **SPECIFICATIONS**

Part No. 513000

Weight: 5.9 Pounds

Height: 12-9/10"

Width: 4-3/10"

Length: 12-3/10"

Fastener Range: 2" – 3 1/4"

Shank: .113 - .131

Magazine Capacity: 44

Op. Pres. p.s.i (bar): 90 - 120



### PowerMaster Plus 4" Framing Nailer

### Proven durability and reliability



### **INCLUDES**

PowerMaster Plus 4" Framing Nailer

Safety glasses

Owner's manual

### **TOOL ACCESSORIES**







Part No. 219090

Pneumatic Oil w/ Antifreeze

### DESCRIPTION/SUGGESTED SPECIFICATIONS

### PowerMaster Plus 4"—

### **DESIGNED FOR TIMBER FRAMERS**

The F400S is the PowerMaster Plus framing nailer with an extended power and driver blade for 4" applications.





### DEPENDABLE

### **ADVANTAGES**

- PowerMaster Plus Design Proven durability and reliability
- Versatile Drives a variety of nails from 1-1/2" to 4" in length.
- Ergonomic Design Centre of gravity is closer to the trigger, providing better balance.
- Durable And Reliable Rugged design will stand up to the demands of the job in any kind of weather.

### **APPLICATIONS**



LSL, LVL, PSL, and OSB

Wall Sheathing

Framing

Floor Decking

Roof

### **SPECIFICATIONS**

### Part No. 502900

Weight: 8.9 lbs

Height: 14-1/2"

Length: 19"

Nail Capacity: 84

Range: 2" - 4"

Shank: .113 - .131

Back of to tool to Nosepiece: 14.5"

Magazine Angle: 30°

Nail Type: 30° Paper Tape, full head/clipped

OP. Pres. p.s.i. (bar): 80 – 120 (5.5 – 8.3)

Warranty: 90-day limited on wear parts,

6-month limited on magazine parts,

1-year limited on housing and cap parts.



### **Pneumatic Strip Framing Nailers**

### **SELECTION CHART**

LENGTH	SHANK DIAMETER	SHANK Type	HEAD STYLE	COATING	PRODUCT NUMBER	NAILS PER PACK	QUANTITY PER MASTER	QUANTITY PER SKID
COATING T			31122		HOMBER	TENTHER	TERRITORER	T EN SHID
2"	0.113	Smooth	Roundrive	Brite	097385	6,500	1	80
2"	0.113	Ring	Roundrive	Brite	650273	5,500	1	80
2-3/8"	0.113	Smooth	Roundrive	Brite	50238	5 Strips	1	80
2-3/8"	0.113	Smooth	Roundrive	Brite	404238	1,000	4	
2-3/8"	0.113	Smooth	Roundrive	Brite	097394	, , , , , , , , , , , , , , , , , , ,	1	96
2-3/8"						5,000		
3"	0.113	Ring	Roundrive	Brite	097397	5,000	1	96 96
3"	0.120	Smooth	Roundrive	Brite	097971	3,000	1	
	0.120	Ring	Roundrive	Brite	097973	3,000	1	96
3"	0.131	Smooth	Roundrive	Brite	650830	2,500	1	96
3-1/4"	0.120	Smooth	Roundrive	Brite	50314	5 Strips	1	125
3-1/4"	0.120	Smooth	Roundrive	Brite	404314	1,000	4	-
3-1/4"	0.120	Smooth	Roundrive	Brite	404058	3,000	1	96
3-1/4"	0.131	Smooth	Roundrive	Brite	650839	2,500	1	96
3-1/4"	0.131	Ring	Roundrive	Brite	097978	2,500	1	96
3-1/2"	0.120	Smooth	Roundrive	Brite	404855	2,500	1	96
3-1/2"	0.131	Smooth	Roundrive	Brite	097987	2,500	1	96
4"	0.131	Smooth	Roundrive	Brite	2X0788	2,500	1	96
COATING TY	/PE: HEAT TREA	TED						
2-1/4"	0.113	Smooth	Roundrive	Heat Treated	401548	4,000	1	96
COATING TY	/PE: HOT DIPPE	D		•				
2"	0.113	Ring	Offset Oval	Hot Dipped	484200	1,000	4	-
2"	0.113	Ring	Offset Oval	Hot Dipped	403389	2,500	1	150
2-3/8"	0.113	Ring	Offset Oval	Hot Dipped	404856	2,500	1	150
3"	0.120	Ring	Offset Oval	Hot Dipped	404857	1,500	1	150
3 1/4"	0.120	Ring	Offset Oval	Hot Dipped	50314G	5 Strips	1	-
3-1/4"	0.120	Ring	Offset Oval	Hot Dipped	404858	1,500	1	150





Also works with Cordless Impulse Framing Nailer (see page P 8)

### **PRO-STRIP ROUNDRIVE NAILS FOR USE WITH**



**POWERMASTER PLUS** 



**COMPACT FRAMER** 



POWERMASTER PLUS 4" FRAMER



CORDLESS IMPULSE XP FRAMING NAILER



### S200-S16 Framing Air Stapler

# Compact and lightweight for increased maneuverability



### **INCLUDES**

S200-S16 Framing Air Stapler

Safety glasses

Quick clear

Owner's manual

### **TOOL ACCESSORIES**



Part No. 403720 Pneumatic Oil



Part No. 219090
Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### S200-S16 Framing Air Stapler—

### WITH THE RIGHT STAPLER AND STAPLES, YOU'LL HAVE THE JOB DONE IN NO TIME.

Paslode staples drive flush into even the hardest woods. And, because Paslode staples are made for Paslode air staplers, you'll have fewer jams, fewer misfires and faster loading only a Paslode stapling System can deliver.

### **POWERFUL**



### FAST



### LIGHTWEIGHT



### **ADVANTAGES**

- Extended bumper life, over 600,000 cycles without failure
- Two finger trigger provides more control
- Quick-clear nose to clear jams quickly
- Versatile, drives 3/4" 2" standard crown stanles
- Top load magazine for easy reload and reduced nail waste

### **SELECTION CHART**

### **16 Gauge Standard Crown Staples**

LENGTH	CROWN SIZE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PER PACK
1"	1/2"	Chisel	16	Galvanized	0T5242	16,500
1-1/4"	1/2"	Chisel	16	Galvanized	0T5238	13,500
1-1/2"	1/2"	Chisel	16	Galvanized	0T2695	10,500
1-3/4"	1/2"	Chisel	16	Galvanized	0T2250	9,000
2"	1/2"	Chisel	16	Galvanized	0T2258	7,500

### **APPLICATIONS**



Roof sheathing

Plywood sheathing

Vinyl siding (with attachment)

### **SPECIFICATIONS**

### Part No. 501230

Weight: 4.9 lbs

Height: 10-3/4"

Length: 12-3/4"

Staple Capacity: 150

Staple Range: 3/4" − 2" 16 gauge,

standard crown (1/2")

Staple Type: 1/2" crown GS16

Galvanized/Brite

Air Req./100p.s.i. (6.9 bar): .040/cycle Op. Pres. p.s.i (bar): 80 – 120 (5.5 – 8.3)

Warranty: 1-year limited







S200-W16 Insulation Sheathing Stapler

Staples with ease, comfort and reliability.



### **INCLUDES**

S200-W16 Insulation Sheathing Air Stapler Safety glasses

Owner's manual

### **TOOL ACCESSORIES**







Part No. 219090

Pneumatic Oil Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### S200-W16 Insulation Sheathing Air Stapler—

### RELIABLE. DURABLE. VERSATILE.

Paslode staples drive flush into even the hardest woods. And, because Paslode staples are made for Paslode staplers, you'll have fewer jams, fewer misfires and faster loading only a Paslode Stapling System can deliver.

### POWERFUL

### FAST

### LIGHTWEIGHT





### **ADVANTAGES**

- Tool-less quick clear nose removes jams easily
- Soft grip handle, for on the job comfort
- Two finger trigger provides more control
- Extended bumper life, over 600,000 cycles without failure
- Versatile Drives 3/4" 2" wide crown (15/16") for a variety of uses
- Top load magazine Reloads easily and reduces nail waste
- Lightweight and well balanced

### **SELECTION CHART**

### **16 Gauge Wide Crown Staples**

LENGTH	CROWN SIZE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PER PACK
5/8"	15/16"	Chisel	16	Galvanized	0T2851	25,500
3/4"	15/16"	Chisel	16	Galvanized	404068	9,000
7/8"	15/16"	Chisel	16	Galvanized	404069	9,000
1-1/4"	15/16"	Chisel	16	Galvanized	404071	9,000
1-1/2"	15/16"	Chisel	16	Galvanized	0T2855	10,500

### APPLICATIONS

Housewrap Wlire lath
Insulation Sheathing

### SPECIFICATIONS

Part No. 501265

Weight: 4.9lbs Staple Range: 3/4"-2" 16 gauge,

Height: 10-3/4" wide crown (15/16")

Length: 12-3/4" Air Req./100p.s.i. (6.9 bar): .040/cycle

Staple Capacity: 150 Op. Pres. p.s.i (bar): 80 – 120 (5.5 – 8.3)

Staple Type: Galvanized Warranty: 1-year limited



### IMLi200 18 Gauge Brad Nailer

### Lightweight and well balanced



### TOOL ACCESSORIES

Part No. 902654C Lithium Ion 7.4v battery

Lithium Ion Battery Charger Part No. 902667C

Part No. 219236 3 Pack of No Mar Tips

Part No. 219086 Degreaser Cleaner

Part No. 401482 Impulse Oil

Part No. 650039 Yellow Fuel Cell (4 pk)

### **INCLUDES**

IMLi200 18 Gauge Brad Nailer

Safety glasses

Ouick clear

Owner's manual

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### 18 Gauge Brad Nailer—

### WE'VE GOT THE FACTS NAILED.

When you need precision in tight spaces, reach for the lightweight Paslode Cordless Finishing Nailing System. It gives great maneuverability to place the nail exactly where you want it wherever you're working: overhead, on ladders or on your knees. Our portable finish nailer, finish nails and fuel cells are designed to work in tandem so you get the job done right, right away

**POWERFUL PRECISE** 



**PRODUCTIVE** 

**PENNIES PER SHOT** 







### ADVANTAGES

- Li-lon for 50% more shots (12,000) per charge
- Quick charge to 80% in 30 minutes
- New battery standby position conserves charge
- New easier depth of drive thumbwheel
- New reversible belt hook
- 8% lighter 4.5 lbs with battery (compared with Ni-Cad battery)

### **SELECTION CHART**

### 18 Gauge Fuel and Finish Nail Packs

LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK
1-1/4"	0.048	Chisel	18	Galvanized	FFP-118114	1,000
1-1/2"	0.048	Chisel	18	Galvanized	FFP-118112	1,000
2"	0.048	Chisel	18	Galvanized	FFP-118002	1,000

See Page P 19 for additional finish nails that work with this tool.

### **PPLICATIONS**





Crown and baseboard mouldings

**Panelling** 

Carpentry

### **SPECIFICATIONS**

Part No. 903700

Weight: 4.5 lbs Nail Range: 3/4" - 2" Height: 11-1/2" Nail Type: 18 ga

Length: 11" Warranty: 5-year limited

Nail Capacity: 100



### IMLi250 16 Gauge Finish Nailer

### Lightweight and well balanced



### **TOOL ACCESSORIES**

Part No. 902654C Lithium Ion 7.4v battery
Part No. 902667C Lithium Ion Battery Charger
Part No. 219236 3 Pack of No Mar Tips
Part No. 219086 Degreaser Cleaner
Part No. 401482 Impulse Oil
Part No. 650039 Yellow Fuel Cell (4 pk)

### INCLUDES

16 Ga Straight Cordless Li-ion Finish

Li-ion Battery Charger

No-Mar Tips

**Rugged Carrying Case** 

Owner's Manual & Safety Glasses

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### 16 Gauge Straight Cordless Finish Nailer—

### **GREAT MANEUVERABILITY.**

It gives great maneuverability to place the nail exactly where you want it wherever you're working: overhead, on ladders or on your knees. Our portable finish nailer, finish nails and fuel cells are designed to work in tandem so you get the job done right, right away.

POWERFUL

### PRECISE



### **PENNIES PER SHOT**





### **ADVANTAGES**

- Powerful precision Finish right the first time.
- Li-ion Battery Drives up to 12,000 nails per charge
- Lightweight Only 4.6 pounds for added comfort and control
- Use Paslode Universal Trim Fuel Drives approx. 1,000 nails
- Battery Standby Position Conserves battery power
- 1 Hour Rapid Charger 80% charge in 20 min

### **SELECTION CHART**

### 16 Gauge Fuel and Finish Nail Packs

LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK
1 1/2"	0.063	Chisel	16	Galvanized	FFP-116112	1,000
2"	0.063	Chisel	16	Galvanized	FFP-116002	1,000

See Page P 19 for additional finish nails that work with this tool.

### **APPLICATIONS**



Door and window trim

Casing

Crown and baseboard moulding

### **SPECIFICATIONS**

Part No. 903800

Weight: 4.6 lbs

Height: 11-3/4"

Length: 10-1/2"

Nail Capacity: 100

Nail Range: 1-1/4" - 2-1/2"

Nail Type: 16 ga Straight

Warranty: 5-year limited



### T250S F16 16 Gauge Finish Nailer

# Precise placement Lightweight Compact



### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### T250S F16 - 16 Gauge Finish Nailer—

### PRECISION AND POWER, LIKE OUR FINISHING NAILER AND NAILS, MAKE A GREAT PAIR.

Our Pneumatic Finishing Nailer is designed to deliver consistent power to drive nails flush, while our finishing nails feature a chisel point design to help prevent wood splitting. When a system works together this perfectly, the results are easy to see.

### LIGHTWEIGHT



### **PRECISE**



### **PROFESSIONAL**



### **ADVANTAGES**

- Consistent power even in hard to reach spots.
  - Compact, open line of sight drives nails where you want it to even in tight spots
  - Reliable power, delivers consistent drive energy in all types of wood
  - 16 gauge reduces wood splitting and nail visibility
- Tool-free depth of drive nail adjustment

- Powerful performer drives 3/4" 2 -1/2" nails into the hardest woods
- Nail lockout prevents misdrives and surface damage
- Rotating exhaust cap easily moves dust out of the way

### **APPLICATIONS**



Window and door trim/finish applications

**Panelling** 

Cabinetry

### **INCLUDES**

T250S F16 – 16 Gauge Finish Nailer

Safety glasses

Carrying case

Owner's manual

### **SPECIFICATIONS**

Part No. 502140

Weight: 3.9 lbs

Height: 10"

Length: 10-3/4"

Nail Capacity: 100 (2 strips) Nail Range: 3/4" – 2 1/2"

Magazine Angle: Straight

Nail Type: 16 gauge Straight –

Smooth, Galvanized

Air Req./80 p.s.i: .040/cycle

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts,

1-year limited on housing and cap parts



### **SELECTION CHART**

16	Gaua	ie Finis	sh Nails	

LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK
1"	0.063	Chisel	16	Galvanized	095203	5,000
1-1/4"	0.063	Chisel	16	Galvanized	095205	5,000
1-1/2"	0.063	Chisel	16	Galvanized	095257	4,000
1-3/4"	0.063	Chisel	16	Galvanized	095435	2,500
2"	0.063	Chisel	16	Galvanized	095436	2,500
2-1/2"	0.063	Chisel	16	Galvanized	090025	2,500
MULTI	0.063	Chisel	16	Galvanized	116000	2,000
1"	0.063	Chisel	16	Galvanized	116001	1,000
1-1/4"	0.063	Chisel	16	Galvanized	116114	1,000
1-1/2"	0.063	Chisel	16	Galvanized	116112	1,000
1-3/4"	0.063	Chisel	16	Galvanized	116134	1,000
2"	0.063	Chisel	16	Galvanized	116002	1,000
2-1/4"	0.063	Chisel	16	Galvanized	400601	2,500
2-1/2"	0.063	Chisel	16	Galvanized	116025	1,000



### **16 GAUGE FINISH NAILS FOR USE WITH**







IMLi250 – 16 GAUGE FINISH NAILER

### **TOOL ACCESSORIES**



Part No. 403720 Pneumatic Oil



Part No. 219090 Pneumatic Oil w/ Antifreeze



P18-200 18 Gauge Brad Nailer

## Jobsite tough all metal housing and magazine



SEE PAGE P 22 FOR 18 GAUGE NAILS SELECTION CHART

### **INCLUDES**

P18-200 18 Gauge Brad Nailer

3 no mar tips

Air fitting

0il

Safety glasses

Allen wrenches

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### P18-200 18 Gauge Brad Nailer —

### BUILT-IN SIGHT LINE ON HOUSING AND NOSE TO ENSURE ACCURATE NAILING.

Paslode driving power with the features contractors demand: depth of drive guide, dual action trigger, dry fire lockout, magazine gauge, easy jam clearing, no slip rubber handle, extra no mar tips and 360° adjustable exhaust. Actuation tip behind nose piece for clear view of work surface. Built-in sight line on housing and nose to ensure accurate nailing.

### LIGHTWEIGHT



### **PRECISE**



### **EASY ACCESS**



### **ADVANTAGES**

- All metal housing & magazine
- Adjustable drive depth
- Bump & sequential fire switch
- Last nail lockout

- Quick-release nose
- 360° adjustabler exhaust
- 5/8" to 2" nails

### **APPLICATIONS**

Windows

Doors

**Furniture** 

Trim applications

### **SPECIFICATIONS**

### Part No. P18-200

Weight: 2.9 lbs Height: 9.5"

Length: 10.25"

Nail Capacity: 100 Nail Range: 5/8" — 2" Magazine Angle: Straight Nail Type: 18 Gauge - Smooth, Galvanized

OP. Pres. p.s.i. (bar): 80-120

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts, 1-year limited on housing and cap parts





P18-FS200 18 Gauge Brad Nailer/ Stapler

Paslode driving power with the features contractors demand



SEE PAGE P 22 FOR 22 GAUGE STAPLES SELECTION CHART

### DESCRIPTION/SUGGESTED SPECIFICATIONS

### P18-FS200 18 Gauge Brad Nailer/Stapler —

### BUILT-IN SIGHT LINE ON HOUSING AND NOSE TO ENSURE ACCURATE NAILING.

Paslode driving power with the features contractors demand: depth of drive guide, dual action trigger, dry fire lockout, magazine gauge, easy jam clearing, no slip rubber handle, extra no mar tips and 360° adjustable exhaust. Actuation tip behind nose piece for clear view of work surface. Built-in sight line on housing and nose to ensure accurate nailing.

LIGHTWEIGHT



**PRECISE** 



**EASY ACCESS** 



### **ADVANTAGES**

- All metal housing & magazine
- Adjustable drive depth
- Bump & sequential fire switch
- Last nail lockout

- Quick-release nose
- 360° adjustable exhaust
- 5/8" to 2" Nails, 5/8" to 1-1/2" staples

### **APPLICATIONS**

Windows

Doors

Furniture

Trim applications

### INCLUDES

P18-FS200 18 Gauge Brad Nailer/Stapler

3 no mar tips

Air fitting

0il

Safety glasses

Allen wrenches

**SPECIFICATIONS** 

Part No. P18-FS200

Weight: 2.9 lbs

Height: 9.5"

Length: 10.25"

Nail Capacity: 100

Nail Range: 5/8" - 2" brad nails and

5/8" – 1-1/2" staples (3/16" crown)

Magazine Angle: Straight

Nail Type: 18 Gauge - Smooth,

Galvanized Nails and 1/4" Crown Staples

OP. Pres. p.s.i. (bar): 80-120

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts, 1-year limited on housing and cap parts.

### 18 Gauge Brad Nailers/Stapler

### **SELECTION CHART**

To Gaage Timon Nano								
LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK		
MULTI	0.048	Chisel	18	Galvanized	118000	2,000		
1"	0.048	Chisel	18	Galvanized	118001	1,000		
2"	0.048	Chisel	18	Galvanized	118002	1,000		
3/4"	0.048	Chisel	18	Galvanized	118034	1,000		
5/8"	0.048	Chisel	18	Galvanized	118058	1,000		
1-1/2"	0.048	Chisel	18	Galvanized	118112	1,000		
1-1/4"	0.048	Chisel	18	Galvanized	118114	1,000		
1-3/4"	0.048	Chisel	18	Galvanized	118134	1,000		
1"	0.048	Chisel	18	Galvanized	950001	3,000		
2"	0.048	Chisel	18	Galvanized	950002	3,000		
3/4"	0.048	Chisel	18	Galvanized	950034	6,000		
5/8"	0.048	Chisel	18	Galvanized	950058	6,000		
1-1/2"	0.048	Chisel	18	Galvanized	950112	3,000		
1-1/4"	0.048	Chisel	18	Galvanized	950114	3,000		
1-3/4"	0.048	Chisel	18	Galvanized	950134	3,000		
1-3/16"	0.048	Chisel	18	Galvanized	951316	3,000		





### 18 GAUGE FINISH NAILS FOR USE WITH



P18-200 — 18 GAUGE BRAD NAILER



P18-FS200 — 18 GAUGE BRAD NAILER/STAPLER



IMLI200 — 18 GAUGE FINISH NAILER

### **TOOL ACCESSORIES**



Part No. 403720 Pneumatic Oil



Part No. 219090
Pneumatic Oil w/
Antifreeze



N18-125 1-1/4" Narrow Soffit Stapler

Adjustable Exhaust

- Maintains a
Cleaner Working
Environment

### **INCLUDES**

N18-125 - 1-1/4" Narrow Soffit Stapler

Safety glasses

Carrying case

Owner's manual

### **TOOL ACCESSORIES**







Part No. 219090

Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### N18-125 - 1-1/4" Narrow Soffit Stapler—

### POWERFUL - MOTOR DRIVES INTO THE HARDEST OF WOODS.

Precision pneumatic trim tools to do the job right. Whether you're a professional contractor or a "week-end" craftsman, the compact and durable. Lite Line series has the right tool for any trim or hobby application. Featuring the same rugged quality as our other heavy duty professional tools.

**POWERFUL** 



**EASY ACCESS** 



**PROFESSIONAL** 



### **ADVANTAGES**

- Ergonomically Balanced and Lightweight —
   To reduce arm fatigue.
- Quick Clear Nose Piece- to reduce down time on the job if a jam should occur.
- Narrow Nose Piece Allows the tool to fit into tight corners.
- Magnesium Metal Housing Durable and provides longer tool life.

### **SELECTION CHART**

### 18 Gauge 1/4" Crown Staples

LENGTH	CROWN SIZE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PER PACK
1/2"	1/4"	Chisel	18	Galvanized	180121	1,000
3/4"	1/4"	Chisel	18	Galvanized	180341	1,000
1"	1/4"	Chisel	18	Galvanized	180011	1,000
1"	1/4"	Chisel	18	Galvanized	140015	5,000
1 1/4"	1/4"	Chisel	18	Galvanized	181141	1,000
1 1/4"	1/4"	Chisel	18	Galvanized	141145	5,000

### **APPLICATIONS**



Trim/Finish

Plywood

Soffits/facias

**Underlayment Applications** 

### **SPECIFICATIONS**

Part No. N18-125

Weight: 2.5 lbs

Height: 9"

Length: 9-1/4"

Nail Capacity: 100

Nail Range: 3/4" - 1-1/4"

Nail Type: GSN 18, 3/16 inch Crown

OP. Pres. p.s.i. (bar): 80-120 (5.5-8.3)

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts,

1-year limited on housing and cap parts.



### 1-1/2" Narrow Crown Finish Stapler

**Ergonomically Balanced** and Lightweight -To Reduce **Arm Fatigue** 



### **INCLUDES**

N18-150 — 1-1/2" Narrow Crown Finish Stapler

Safety glasses

Carrying case

Owner's manual

### OOL ACCESSORIES



Pneumatic Oil



### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### N18-150 - 1-1/3" Narrow Crown Finish Stapler—

### **POWERFUL – MOTOR DRIVES INTO THE HARDEST OF WOODS.**

Precision pneumatic trim tools to do the job right. Whether you're a professional contractor or a "week-end" craftsman, the compact and durable. Lite Line series has the right tool for any trim or hobby application. Featuring the same rugged quality as our other heavy duty professional tools.

### **POWERFUL**



### **PRECISE**



### **PROFESSIONAL**



### **ADVANTAGES**

- Adjustable Exhaust Maintains a cleaner working environment.
- Quick Clear Nose Piece to reduce down time on the job if a jam should occur.
- Narrow Nose Piece Allows the tool to fit into tight corners.
- Magnesium Metal Housing Durable and provides longer tool life.

### **SELECTION CHART**

### 18 Gauge 1/4" Crown Staples

LENGTH	CROWN SIZE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PER PACK
1/2"	1/4"	Chisel	18	Galvanized	180121	1,000
3/4"	1/4"	Chisel	18	Galvanized	180341	1,000
1"	1/4"	Chisel	18	Galvanized	180011	1,000
1"	1/4"	Chisel	18	Galvanized	140015	5,000
1 1/4"	1/4"	Chisel	18	Galvanized	181141	1,000
1 1/4"	1/4"	Chisel	18	Galvanized	141145	5,000
1 1/2"	1/4"	Chisel	18	Galvanized	141125	5,000

### APPLICATIONS



Trim/Finish

Plywood

Soffits/facias

**Underlayment Applications** 

### **SPECIFICATIONS**

Part No. N18-150

Weight: 2.8 lbs

Height: 9-3/4"

Length: 11-1/2"

Nail Capacity: 100

Nail Range: 3/4" - 1-1/2"

Nail Type: GSN 18, 3/16 inch Crown

OP. Pres. p.s.i. (bar): 80-120 (5.5-8.3)

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts.

1-year limited on housing and cap parts.



Pneumatic Oil w/ Antifreeze



### US-100 Upholstery/ Craft Stapler

### Easy-load Magazine





### **INCLUDES**

US100 Upholstery/Craft Stapler

### **TOOL ACCESSORIES**







Part No. 219090

Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### **US-100 Upholstery/Craft Stapler—**

### LONG NARROW NOSEPIECE FOR TIGHT SPOTS

Lightweight - At only 2 lbs this tool is very easy to handle and decreases operator fatigue. Heavy-duty driver blade.

**FAST** 

**PRECISE** 

**QUICK LOAD** 







### **ADVANTAGES**

Drives 3/8" - 9/16" upholstery staples.

Fast - Shoots 5 staples per second

### **SELECTION CHART**

### **22 Gauge Upholstery Staples**

LENGTH	CROWN SIZE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PER PACK
3/8"	3/8"	Chisel	22	Galvanized	422038	4,000

### **APPLICATIONS**



Upholstery

Crafts

Light paneling

Home project applications

### **SPECIFICATIONS**

Part No. US-100

Weight: 2.8 lbs

Height: 9-1/2"

Length: 12-1/2"

Nail Capacity: 100

Nail Range: 3/8" - 9/16"

Nail Type: 22 Gauge Upholstery

OP. Pres. p.s.i. (bar): 80-120 (5.5-8.3)

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts,

1-year limited on housing and cap parts.





# HP100 Headless Pin Nailer





### OOL ACCESSORIES





Pneumatic Oil



Part No. 219090

### Pneumatic Oil w/ Antifreeze

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### **HP100 Headless Pin Nailer**—

### **COMPACT - LIGHTWEIGHT.**

Multi-directional exhaust port. Pin nails leave a very small hole for easy finishing and painting.



### LIGHTWEIGHT



### **PROFESSIONAL**



### **ADVANTAGES**

Quick release nose piece

Drives 1/2" to 1-1/2" pin nails

### **SELECTION CHART**

### 23 Gauge Pin Nails

LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK
1"	0.025	Chisel	23	Brite	323001	3,000
3/4"	0.025	Chisel	23	Brite	323034	3,000
1-1/2"	0.025	Chisel	23	Brite	323112	3,000
1-3/8"	0.025	Chisel	23	Brite	323138	3,000

### APPLICATIONS



Fine woodworking and trim work

### **INCLUDES**

HP100 Headless Pin Nailer

Safety glasses

Tool case

Allen wrench and oil

### **SPECIFICATIONS**

Part No. HP100

Weight: 1.2 lbs

Height: 9-1/4"

Length: 7-3/4"

Nail Capacity: 100

Nail Range: 1/2" - 1-1/2" Magazine Angle: Straight Nail Type: 23 Gauge - Smooth, **Galvanized Pin Nails** 

OP. Pres. p.s.i. (bar): 80-120

Warranty: 90-day limited on wear parts, 6-month limited on magazine parts, 1-year limited on housing and cap parts.





HT550 20 Gauge Hammer Stapler

Quick Clear Jam Clearing

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### HT550 – 20 Gauge Hammer Stapler—

### **HEAVY DUTY, DURABLE CONSTRUCTION.**

Precision pneumatic trim tools to do the job right. Whether you're a professional contractor or a "week-end" craftsman, the compact and durable. Lite Line series has the right tool for any trim or hobby application. Featuring the same rugged quality as our other heavy duty professional tools.

FAST



**POWERFUL** 




**DEPENDABLE** 



### **ADVANTAGES**

- Rear Loading Magazine
- Quick Clear Jam Clearing
- Two Strip Capacity



### **APPLICATIONS**



**Carpet Padding** 

Insulation

**Roof Paper** 

House Wrap

### **INCLUDES**

HT550 – 20 Gauge Hammer Stapler

### **SPECIFICATIONS**

Part No. 1013292

Weight: 2.0 lbs

Height: 3-1/4"

Length: 11-3/4"

Staple Capacity: 168

Staple Range: 5/32" - 5/16"

Magazine Angle: Staight

Nail Type: 20Ga, 1/2" Crown

OP. Pres. p.s.i. (bar): N/A (Manual Tool)



### FloorMaster Plus™

### Floormaster Plus™ 2 in 1 Flooring Nailer/Stapler





Compact design gets you closer to walls

### **INCLUDES**

Tool & Mallet

Case

### **DESCRIPTION/SUGGESTED SPECIFICATIONS**

### 2 in 1 Flooring Nailer/Stapler—

### THE PROFESSIONAL GRADE 2 IN 1 FLOORING TOOL.

Optimal performance and solid reliability. Easy maintenance and low cost of ownership. Lightweight – 10.4 lbs

### PRECISE

### FAST

### **POWERFUL**





### **ADVANTAGES**

- Easy Actuation
  - Only 4 lbs of pressure anywhere on poppet valve
  - Compact all-around striking surface to avoid marking/damaging walls
- Industry-Best Design & Ergonomics
  - Reverse handle with foam grip for reduced fatigue
  - Compact size for nailing boards closer to the end walls

### **SELECTION CHART**

### **Flooring Staples and Cleats**

LENGTH	SHANK DIAMETER	SHANK TYPE	GAUGE	COATING	PRODUCT NUMBER	NAILS PER PACK
1 3/4"	Staple	Chisel	15	Brite	151134	1,000
1 3/4"	Staple	Chisel	15	Brite	155134	5,000
2"	Staple	Chisel	15	Brite	151002	1,000
2"	Staple	Chisel	15	Brite	155002	5,000
2"	Cleat	Cleat	16	Brite	100002	1,000

### **APPLICATIONS**



3/4" Hardwood flooring



### **SPECIFICATIONS**

Part No. F2N1-200

Weight: 10.4 lbs

Height: 18"

Length: 16"

Flooring Fasteners: 15GA staples &

16GA L-cleats

Fastener Lengths: 1-3/4", 2" 15GA staples &

2" 16 GA L-cleats



### Miscellaneous Fasteners

### **SELECTION CHART**

### **MISCELLANEOUS FASTENERS**

LENGTH	TYPE	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	CLEATS PER PACK
2"	Cleat	Chisel	16	Brite	150018	1,000
15 Degree Co	nil Nails		L	1	I	1
LENGTH	SHANK DIAMETER	SHANK	DEGREE	COATING	PRODUCT NUMBER	NAILS PER PACK
1-1/4"	0.080	Spiral	15	Brite	404501	6,300
1-3/4"	0.080	Spiral	15	Brite	404505	6,300
2"	0.099	Spiral	15	Brite	404582	4,500
2-1/4"	0.099	Spiral	15	Brite	404583	4,500
2-1/2"	0.099	Spiral	15	Brite	404584	4,500
3"	0.12	Spiral	15	Brite	404508	4,500
3-1/4"	0.12	Spiral	15	Brite	404510	4,500
5 Degree H	ot Dipped Coil I	Nails				
LENGTH	SHANK DIAMETER	SHANK	DEGREE	COATING	PRODUCT NUMBER	NAILS PER PACK
2"	0.099	Spiral	15	Galvanized	097002	2,500
8 Gauge GE	N-ER-X 7/32" Cr	own Staples				
LENGTH	ТҮРЕ	STAPLE POINT	GAUGE	COATING	PRODUCT NUMBER	STAPLES PE PACK
5/8"	7/32"	Chisel	18	Galvanized	732058	5,000
1"	7/32"	Chisel	18	Galvanized	732001	5,000
1-3/8"	7/32"	Chisel	18	Galvanized	732138	5,000
0 Degree P	ositive Placeme	ent Nails				
LENGTH	SHANK DIAMETER	SHANK	DEGREE	COATING	PRODUCT NUMBER	NAILS PER PACK
1-1/2"	0.148	Smooth	30	Galvanized	650014	3,000
1-1/2"	0.148	Smooth	30	Brite	650026	3,000
, =				<del>-</del>	1	1
1-1/2"	0.148	Smooth	30	Brite	650027	2,500



### **TW** Construction Products\*

### **National Headquarters**

120 Travail Road Markham, Ontario, L3S 3J1

Tel: 905-471-7403 800-387-9692

Fax: 905-471-7208 800-668-8688

### Technical and Customer Service Support

Tel: 800-387-9692

Fax: 800-668-8688

### **Regional Warehouses**

- Markham, Ontario
- Coquitlam, British Columbia
- Calgary, Alberta

Ramset, T3, T3Cup, Trakfast, GypFast, Mastershot, Triggershot, Hammershot, PowerPoint, TE Pin and Climacoat are trademarks of Illinois Tools Works, Inc.

A7, C6+, Dynabolt, G5, Hammer-Set, LDT, Multi-Set II, Poly Set, Red Head, Redi-Drive, S7, Striker, and Trubolt are trademarks of ITW Red Head and Illinois Tool Works, Inc.

Teks, TruGrip GT, Scots, Maxiseal, Dek-Cap, Tapcon,SG, Tapcon, Maxi-Set Tapcon, Condrive, E-Z Ancor, E-Z Toggle, Twist-N-Lock, E-Z Lite, E-Z Mini, Stud Solver, Hi-Lo, S-12, Backer-On, Rock-On, Decking, Dec-U-Drive, Dek-Cap, Grid-Mate, Grid-Mate, PB, Climaseal, Spex, Climacoat, UltraShield, Climashield and Building Ideas That Work are trademarks of ITW Buildex and Illinois Tool Works. Inc.

Sammy X-Press, Sammy X-Press It, Sammy X-Press Swivel, Sammy X-Press Sidewinder, Tapcon, Sammy Saddle, Speedy Pole Tool, Spot-Rite Level, and Truss-T Hanger are trademarks of ITW Buildex and Illinois Tool Works, Inc.

The term "Paslode" is a trademark and the Paslode logo and all related product and service names, designs and slogans are Paslode trademarks. Paslode, RounDrive, Impulse, Positive Placement are registered trademarks, PowerFramer and quicklode are trademarks of Illinois Tool Works.

R4, RSS, Kameleon, Fin/Trim, RT Composite, Low Profile Cabinet, Pheinox, Top Star, VWS, Caliburn, and The GRK Fasteners Canada Ltd. and all associated designs and logos are trademarks of GRK Fasteners Canada Ltd., used under license.

Hilti is a registered trademark of Hilti, Corp.

DensGlass is a registered trademark of Georgia Pacific Building Products.

Dekstrip, Dektite, Retrofit Dektite, and Dektite are registered trademarks of Deks Industries Pty Ltd.

Phillips Square-driv is a registered trademark of the Phillips Screw Company.

© 2016 Illinois Tool Works, Inc. Form. No. 11/16

## Take Advantage of these Contractor Services from ITW Construction Products Canada

From job sites to engineering firms, from Safety Seminars to on-site services, we hope you take advantage of our many contractor services—at no charge! After all, it's one thing to offer the quality products you need to do your job. It's another to provide you with superior service, engineering expertise and total product support.

At ITW Construction Products Canada, we are proud of the partnerships we have built through the years with our distributor network and contractors. Thanks to quality products, innovative services and on-time delivery, we will continue to build new relationships and strengthen existing ones today... and into the next century.

- Factory representatives with years of training and service experience will go out to your job site to provide you with product, service and technical assistance.
- We provide architects and engineers with complete submittal packages which gives them the technical data needed to specify ITW Construction Products Canada products. Contact your ITW Construction Products Canada Distributor or your nearest Customer Service location to request submittal packages.

### **Technical Application Assistance:**

Our staff of application specialists are ready to assist you with any type of application or code approval question during any phase of your project. Call 1-800-387-9692 between 8:00 a.m. and 5:00 p.m. EST, Monday through Friday.

### Distributed By

The information and recommendations in this document are based on the best information available to us at the time of preparation. We make no other warranty, expressed or implied, as to its correctness or completeness, or as to the results or reliance of this document.