

Bevel Siding

Bevel Siding


The Bevel profile is the newest addition to Boral TruExterior® Siding. Recreating the look and character of traditional clapboard or bevel lap siding, the Bevel profile offers the true taper and shadow line effect historically seen with cedar and redwood siding. At the same time, the siding reduces the moisture- and thermal movement-related issues commonly seen with other natural and manmade materials.

Available in 6-inch, 8-inch and 10-inch widths, Boral TruExterior® Bevel Siding is ideal for homeowners who desire the look, feel and character of authentic wood siding with superior, long-lasting performance.

Boral TruExterior® Siding

Made with Boral's proprietary blend of polymers and fly ash, Boral TruExterior® Siding offers a high level of dimensional stability for reduced expansion and contraction, and durability for resistance to warping, cracking, and splitting. As a result, the material requires no sealing of ends or cuts in the field, it can be used in ground-contact applications, and it can be painted any color, including dark hues.

Nominal Size	Actual Thickness (A)	Actual Width (B)	Minimum Overlap (C)
½ x 6	0.50"	5.50"	1.0"
½ x 8	0.50"	7.25"	1.0"
¾ x 10	0.75"	9.25"	1.0"

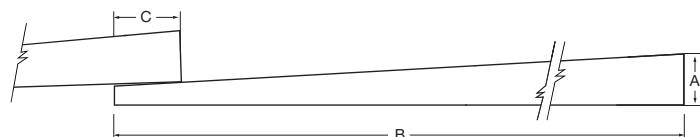

[†]See Boral TruExterior® Siding Warranty and Data Sheet for proprietary test results, located at www.BoralTruExterior.com

Boral TruExterior® Siding Facts

- Workability exceeds that of wood siding
- Installs with standard woodworking tools and methods
- No need to prime ends or field cuts
- Easily accepts paint of any color
- Accepts a wide variety of fasteners
- Resists rot and termite attacks[†]
- Maintains high level of dimensional stability[†]
- No cracking or splitting from moisture
- 16' lengths
- Made in the USA
- 20-year limited warranty[†]

**8" and 10" Sizes
Now Available!**





Installation Best Practices

- The product should be dry and clean when installed
- The use of a drainable house wrap is recommend
- For longer tool life, use carbide tipped blades and drill bits
- Use fasteners designed for exterior trim and siding
- Minimum lap is 1"
- Each board has a factory-applied primer
- The product must be painted
- No gluing or gapping is necessary to control or limit movement
- No need to prime or paint ends or field-cut edges



Sustainability

Boral TruExterior® Siding's sustainable properties are a result of the use of a proprietary polymer blend and highly-refined coal combustion products (ash), which are endorsed by the U.S. Green Building Council (USGBC) in the production of construction materials.

- Minimum 70% recycled content, as verified by SCS Global Services
- Cradle to Cradle Certified™
- Produced in a state-of-the-art LEED Silver certified commercial facility

