


DELTA RIB

Condensed
Technical
Reference

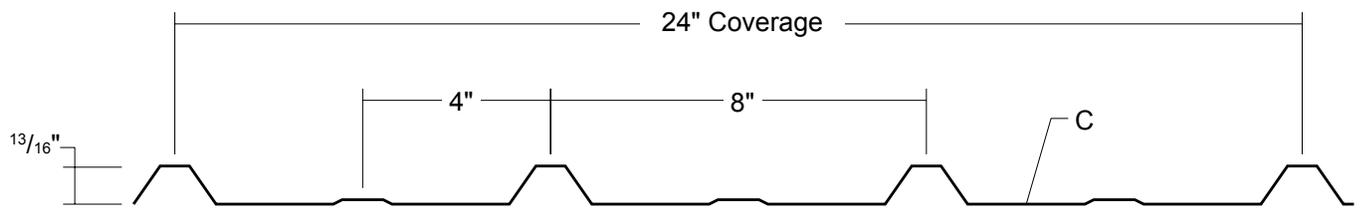

AGRICULTURAL
RESIDENTIAL
PANEL

DIRECT
FASTENED


24"
COVERAGE

MINIMUM
SLOPE
3:12

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45[®] and Acrylic-Coated Galvalume[®]
- ▶ Corrosion Protection: AZ55 per ASTM A 792 for unpainted Galvalume[®]
AZ50 per ASTM A 792 for painted Galvalume[®]
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 26 ga standard; 29 ga and 24 ga optional
- ▶ 24" panel coverage, $\frac{13}{16}$ " rib height
- ▶ Panel Length: Minimum: 5'; Maximum: 40' recommended
- ▶ Trapezoidal ribs on 8" centers
- ▶ Applies to open framing or solid substrate
- ▶ Minimum roof slope: 3:12
- ▶ Residential and Agricultural applications
- ▶ Lightweight for easy handling
- ▶ Economical and distinctive appearance

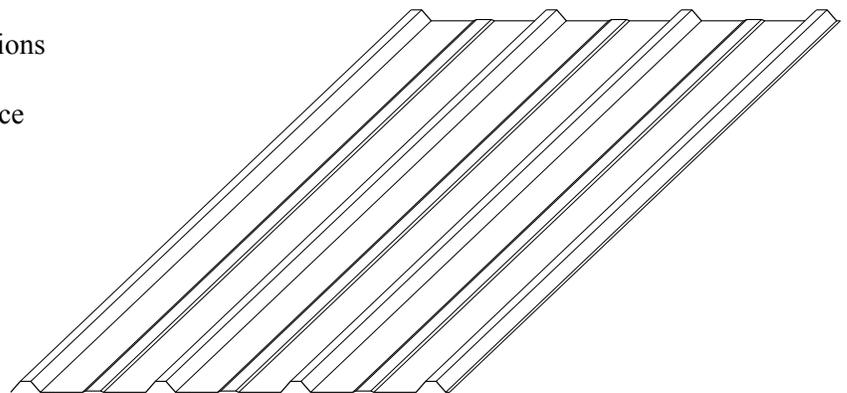

TESTING AND APPROVALS

- ▶ UL 2218 Impact Resistance - Class 4
- ▶ UL 790 Fire Resistance Rating - Class A, per building code
- ▶ UL 263 Fire Resistance Rating - per assembly

ms metal sales[™]
manufacturing corporation

