



ACCESSORY

Ideal for Small Item-Level Tagging

SMARTRAC's ACCESSORY inlays and tags are optimized for accessory and cosmetics applications, offering excellent performance and superior close-coupling features.

ACCESSORY inlays and tags have a small (30mm/1.2 inch) form factor, which allows them to be easily converted into small-sized hang-tags for accessory labels, or attached to small cosmetics items. They are equipped with the Impinj Monza R6 chip that comes with an Autotune feature, which helps the products to work at peak efficiency, even in rapidly changing environments. ACCESSORY products are available with the Impinj Monza R6 and R6-P chips. Inlays with Monza R6 chips offer unique TID, enable pre-serialized EPC and are 100% performance tested. Inlays with Monza R6-P offer additional features such as add-on user memory and on-demand memory configuration as well as a kill function and easy access control to change tag information for store data, if required. Available in dry, wet and paper tag delivery formats, the inlays and tags are suitable for full integration into the SMART COSMOS Cloud Services platform.

SMARTRAC's inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, especially in the retail environment.

Overview

Operating Frequency

860 - 960 MHz

Integrated Circuit (IC)

Impinj Monza R6 & R6-P

Antenna Size

30 x 15 mm (1.2 x 0.6 in)

Die-cut Size

33 x 18 mm (1.3 x 0.7 in)

International Standards

- ▶ EPC Class 1 Gen 2
ISO 18000-6C



Application Areas

- ▶ Brand protection
- ▶ Retail for accessory and cosmetics

ACCESSORY

Ideal for Small Item-Level Tagging

Technical Features			
IC + Memory	Size	Format	Sales Code
Impinj Monza R6 96 bit	30 x 15 mm / 1.2 x 0.6 in	Inlay	3005251
	33 x 18 mm / 1.3 x 0.7 in	Wet	3005252
	33 x 18 mm / 1.3 x 0.7 in	Paper Tag	3005253
Impinj Monza R6-P 128 bit EPC + 32 bit user 96 bit EPC + 64 bit user	30 x 15 mm / 1.2 x 0.6 in	Inlay	3006256
	33 x 18 mm / 1.3 x 0.7 in	Wet	3006267
	33 x 18 mm / 1.3 x 0.7 in	Paper tag	3006268
Web Width	36 mm / 1.4 in		
Operating Temperature	-40 °C to +85 °C / -40 °F to +185 °F		
Adhesive	Acrylic, water borne adhesive		
Qty/Reel	10,000 pcs		
Core Size	76 mm / 3 in		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		

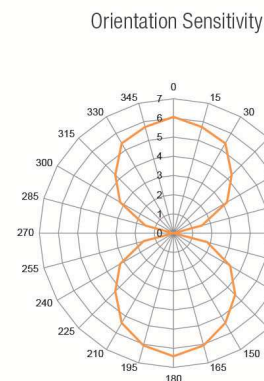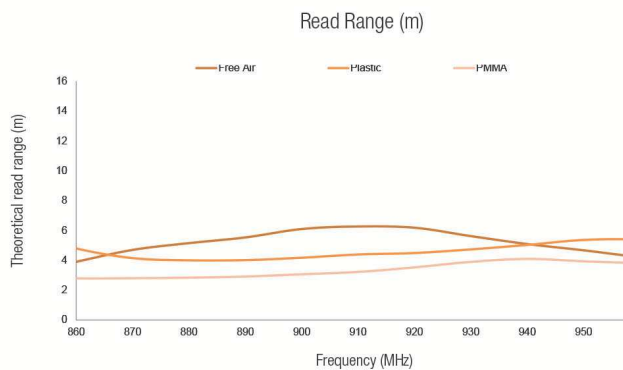

© 2017 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.



1 (888) 238-1155 Inside USA • 1 (205) 383-2244 Outside USA
 info@atlasRFIDstore.com • www.atlasRFIDstore.com

atlasRFIDstore.com