


## INSIGHT 4K HFR 360 (Preliminary)

27,000 Lumens | Contrast Ratio: 2,000:1 | Part No:119-667

## INSIGHT MULTIVIEW 4K DIGITAL PROJECTOR

THE VISIONARIES CHOICE

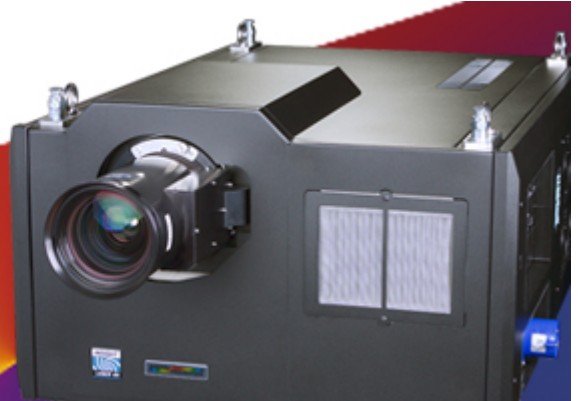

<b>Colour System:</b>	<b>DMD Specification:</b>
3-chip DLP®	4096 x 2160 pixels native, +/- 12° tilt angle Fast transit pixels for smooth greyscale and improved contrast.
<b>Display Type:</b>	<b>Aspect Ratio:</b>
3 x 1.38" DarkChip™ DMD™	1.90:1
	<b>Fill Factor</b>
	87%

### Key Features

- Up to 360 FPS Display capability at native 4096 x 2160 resolution.
- Accepts up to 6 inputs in parallel and displays them sequentially with smooth greyscale and amazing colour.
- High Brightness laser illuminated.
- Compact integrated chassis.
- Long life light source.
- Sealed optics.
- Maintenance free.
- 3D capable.
- DisplayPort 1.2 and HDMI 2.0 inputs.

### Video & Graphics processing

- Up to 6 x 60 fps 4096 x 2160 pixels sequential input via single DisplayPort input.
- Dark Time insertion matched to fast switching glasses.
- Smear reduction for 2D displays.
- Synchronisation of active glasses (or polarising switcher, TBC).
- Image blanking (linear curtains) on all edges.
- Low latency processing.

### Color adjustments

- Up to 12 bits color processing (depending on source and input type).
- Degamma table maps input to 16 bit palette (R, G & B) for display.
- Degamma selection from a list of parametric curves.
- Individual R, G & B lift and gain.
- Black and White level adjustment via Brightness & Contrast control.

### ColorMax™

- Accurate matching of projectors in tiled or blended applications.

- User selection and storage of primary and secondary user defined color targets up to 7 points.

## Projector Control

- Keypad with on-screen display.
- Remote control - IR or cable.
- Network control via RJ45.
- Served web page for remote control via tablets and smart phones. Wireless requires access point (not supplied).
- PC control application.

## Mounting

- Built-in stacking points.
- Eyebolts for quick mounting.
- Optional mounting/grab rail.

## Lens features

- Robust lens mount with memorised position, zoom and focus.
- Extensive lens shift encompassing all lens capabilities.
- High quality sharp lenses designed for 4K performance with long focal distances.

## Source Compatibility:

Graphics standards up to 4096 x 2160 at 60 fps via DisplayPort. 60 fps via HDMI. Higher input frame rates supported at lower input resolution.

## Inputs/Outputs

Video & Computer			Communication & Control		
Type	Connector	Qty	Type	Connector	Qty
DisplayPort 1.2	DisplayPort	6	3D Sync Out	BNC	1
HDMI 2.0	HDMI	6	3D Sync In	BNC	1
			LAN	RJ45	1
			RS232	9-pin D Sub	1
			Wired Remote In	3.5mm Stereo Jack	1
			Service Port	USB Type A	1
3D Formats Supported			HDTV Formats Supported		
Dual Pipe			4096 x 2160p (24, 25, 29.97, 30, 50, 59.94, 60 Hz)		
Frame Sequential			3840 x 2160p (24, 25, 29.97, 30, 50, 59.94, 60 Hz)		
			1080p (24, 25, 29.97, 30, 50, 59.94, 60 Hz)		
Computer Compatibility			Bandwidth		
Up to 4096 x 2160			N/A		
Remote Control			Automation Control		
Wired remote control			RS232		
On-Board keypad with OSD			LAN		
Colour Temperature					
User selectable from 3300 to 10000K					
Lamp Type			Typical Lamp Life		
Laser Light Source			20,000 hours		
Lenses					
Lens	Part No.	Optimised Focus Range	Lens Shift		

<b>At Native 4K</b>	-	-	-
0.93:1 fixed	117-310	0.5m - 100m	Vert: 0.21 (U) 0.21 (D) frame, Hor: 0.08 (L) 0.08 (R) frame
1.13 - 1.72:1 zoom	115-627	2.5m - 100m	Vert: 0.34 (U) 0.19 (D) frame, Hor: 0.08 (L) 0.10 (R) frame
1.65 - 2.60:1 zoom	115-630	3.5m - 100m	Vert: 0.40 (U) 0.20 (D) frame, Hor: 0.13 (L) 0.13 (R) frame
2.53 - 4.98:1 zoom	115-632	4.5m - 100m	Vert: 0.37 (U) 0.20 (D) frame, Hor: 0.13 (L) 0.13 (R) frame
<b>At UHD</b>	-	-	-
0.99:1 fixed	117-310	0.5m - 100m	Vert: 0.27 (U) 0.20 (D) frame, Hor: 0.10 (L) 0.11 (R) frame
1.21 - 1.83:1 zoom	115-627	2.5m - 100m	Vert: 0.40 (U) 0.20 (D) frame, Hor: 0.10 (L) 0.14 (R) frame
1.76 - 2.77:1 zoom	115-630	3.5m - 100m	Vert: 0.45 (U) 0.20 (D) frame, Hor: 0.10 (L) 0.17 (R) frame
2.70 - 5.31:1 zoom	115-632	4.5m - 100m	Vert: 0.42 (U) 0.20 (D) frame, Hor: 0.10 (L) 0.17 (R) frame

## Lens Mount

Motorised shift, zoom and focus. Intelligent Lens Memory with user-definable preset positions.

### Mechanical Mounting

Front/Rear Table  
Front/Rear Ceiling  
Adjustable Front/Rear Feet

### Orientation

**Table Top or Inverted:** Yes  
**Pointing Up:** Yes  
**Pointing Down:** Yes  
**Roll (Portrait):** Yes

### Power Requirements

200 - 240VAC 50/60Hz single phase

### Power Consumption

3400W

### Thermal Dissipation

11600 BTU/Hour

### Fan Noise

54 dBA

### Operating/Storage Temperature

Operating: 0 to 40C (32 to 104F)  
Storage: -10 to 50C (14 to 122F)

### Operating Humidity

20 to 80% non-condensing

### Weight (Chassis Only)

100 kg  
220 lb

### Dimensions

H: 47.9 cm W: 72.2 cm L: 100.3 cm  
H: 18.9 in W: 28.4 in L: 39.5 in

### Safety & EMC Regulations

CE, FCC Class A, UL, CCC

### Accessories

Accessory	Part No.
Mounting rail	118-471
Replacement filter set	118-534
Lens Adapter Kit for 0.72:1 4K Schneider Lens	117-343

*\*Dimensions included for reference only and are subject to change. Please download the full set of CAD files for this display for more accurate information.*

### Downloads

[PDF CAD Drawings](#)

[AUTOCAD Drawings](#)



Certificate Number 13629  
ISO 9001

**DIGITAL PROJECTION, LTD** GREENSIDE WAY, MIDDLETON MANCHESTER, UK. M24 1XX  
T: +44.161.947.3300 | F: +44.161.684.7674 | [www.digitalprojection.co.uk](http://www.digitalprojection.co.uk)

**DIGITAL PROJECTION, INC** 55 CHASTAIN ROAD, SUITE 115 KENNESAW, GA. 30144  
T: 770.420.1350 | F: 770.420.1360 | [www.digitalprojection.com](http://www.digitalprojection.com)

**DIGITAL PROJECTION, CHINA** Rm A2006,ShaoYaoJu 101 North lane, Shi AO International Center, Chao Yang District, Beijing, 100029,PR  
CHINA  
T: +86.10.58239771 | F: +86 10 58239770

**DIGITAL PROJECTION, ASIA** 16 NEW INDUSTRIAL ROAD, #02-10 HUDSON TECHNOCENTRE SINGAPORE 536204  
T: +65.6284.1138 | F: +65.6284.1238