



# SPECIFICATION SHEET TAPE-256-BI

## DESCRIPTION

- Fully dimmable & tunable
- Double sided 3m tape backing
- Low power consumption
- Low heat emission
- Available in IP20
- Easy to install



**DL** Dimmable Lighting  
0 to 100% flicker free dimming



**TL** Tunable Lighting



Working Temperature  
-10°C to +40°C




3 Year Limited  
Warranty



## SPECIFICATIONS

<b>LED Quantity:</b>	256 LED/M
<b>Color /CCT:</b>	2700K-6500K
<b>Chip:</b>	EPISTAR
<b>CRI:</b>	Ra+95
<b>Bin/Step:</b>	1 bin only, 2 step binning
<b>Luminous Flux per meter/3.3FT:</b>	1530 Lm
<b>Beam Angle:</b>	120°
<b>Power Rating per meter/3.3FT:</b>	14.4W, 24V, 0.6A
<b>PCB Width:</b>	40mm
<b>Cut Length:</b>	62mm/2.5" or 16 LEDs
<b>IP Rating:</b>	IP20
<b>Max Run Length:</b>	5 meters (16.4FT/Roll)
<b>Life Span:</b>	50,000 hrs
<b>Warranty:</b>	3 years
<b>Certificate:</b>	CE, RoHS, UL Listed
<b>Compatible Drivers:</b>	Use SRPC 2108-24V-200, SR-2108A-M5, or SR-2108B-M24 driver/decoder
<b>Packaging:</b>	16.4 FT spool IP20= 378g/roll

MODEL CODES	DESCRIPTION
TAPE-256-BI	Tape 256 LED/M, 2700K - 6500K, 14.4W/M, 95+, 1530Lm/M, 5M (16.4FT/Roll), 40mm, Dimmable, 24V

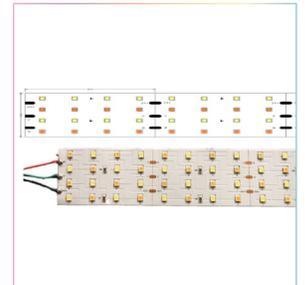

## COLOR TEMPERATURE




## TYPICAL APPLICATIONS

- ✓ Accent lighting
- ✓ Decorative lighting
- ✓ Architectural lighting

## CUT LENGTH

62mm/2.5" or 16 LEDs

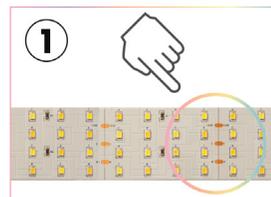

Find the cut line on the strip  
(between the solder pads).




Carefully cut the strip on the  
cut line.

**COMPATIBLE TRACKS / TRIMLESS TRACKS**

*\*For a dot-less result use one of these recommended track / trimless tracks diffuser combinations.*

TRACK-OP-051

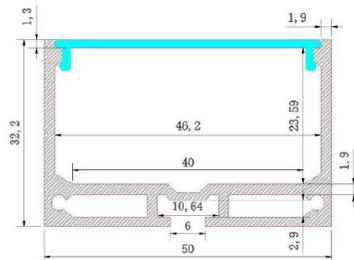

TRACK-OP-058-TL

