

# Allure™ EC-Smart-Vue Sensor Series

Line of communicating sensors  
with backlit display and  
graphical menus



## Overview

The Allure EC-Smart-Vue Series is designed to interface with Distech Controls' ECLYPSE™ series BACnet/IP and Wi-Fi Controllers, ECB series BACnet® Controllers and ECL series LONWORKS® Controllers.

This line of communicating sensors with backlit display consists of eight models that provide precise environmental zone control. Models are available with any combination of the following: temperature, humidity, CO<sub>2</sub>, and motion sensor.

## Features & Benefits

- Multi-sensing capabilities (temperature, humidity, CO<sub>2</sub>, and motion) using one wire and one connection
- Optional CO<sub>2</sub> sensor facilitates demand-controlled ventilation strategies
- Optional motion sensor helps achieve energy efficiency through occupancy-based control
- ABC Logic Self-Calibration system guarantees lifetime CO<sub>2</sub> calibration
- The ECO-Vue leaf pattern graphically indicates energy consumption in real time to promote an occupant's energy-conscious behavior
- Password protected technician mode allows an installer to perform commissioning and troubleshooting
- Can be used as a hand-held tool for HVAC equipment configuration and system troubleshooting
- When associated to VAV controllers, the Allure EC-Smart-Vue Series sensors can also perform air balancing of the system without requiring an onsite controls engineer.
- Programmability with Distech Controls' EC-*gfx*Program, which makes Building Automation System programming effortless
- Quick and easy installation: Both power and communications pass through a single Cat 5e cable for reduced installation costs and easier installation
- Two RJ-45 ports facilitate the daisy-chain connections of room devices.

# Model Selection Table

Example: Allure EC-Smart-Vue-*M*

Series	Functionality
Allure EC-Smart-Vue	[blank]: Temperature only - <i>C</i> : CO <sub>2</sub> <sup>1</sup> , Temperature - <i>H</i> : Humidity, Temperature - <i>M</i> : Motion, Temperature - <i>CH</i> : CO <sub>2</sub> <sup>1</sup> , Humidity, Temperature - <i>CM</i> : CO <sub>2</sub> <sup>1</sup> , Motion, Temperature - <i>HM</i> : Humidity, Motion, Temperature - <i>CHM</i> : CO <sub>2</sub> <sup>1</sup> , Humidity, Motion, Temperature

1. The Allure EC-Smart-Vue CO<sub>2</sub> models must be used in spaces that are periodically unoccupied (e.g. during evening or nighttime hours). A controller can support a maximum of two communicating sensors equipped with a CO<sub>2</sub> sensor. Any remaining connected communicating sensors must be without a CO<sub>2</sub> sensor.

## Product Specifications

### Power Supply Input

Voltage	16 VDC maximum, Class 2
Power Consumption	At the connected controller, an additional 5.25 VA per CO <sub>2</sub> sensor model and 1.0 VA per non-CO <sub>2</sub> sensor model.

### Communications

Rate	38 400 bps
Communications	RS-485
Wiring	Cable length: 600 ft (180 m) maximum
Cable Type	T568B Cat 5e network cable, 4 twisted pairs
Input Connector	RJ-45
Output Connector	RJ-45 (pass-through for daisy chain connection to other room devices)
Network Access Jack <sup>1</sup>	1/8" (3.5 mm) stereo plug connector
Daisy-chaining	Up to 12 Allure EC-Smart-Vue sensors or room devices depending on the controller model – see the controller's datasheet

1. Not available with ECLYPSE Series, PTU Series, ECB-VAVS, or ECL-VAVS

### Temperature Sensor

Type	10 kΩ NTC Thermistor
Range	41°F to 104°F (5°C to 40°C)
Sensing Component	±0.5°F (±0.28°C)
Typical Accuracy	
Overall Accuracy	± 0.9°F (± 0.5°C)
Resolution	0.18°F (0.1°C)

### Humidity Sensor

Accuracy	±3%
Resolution	1%

### Motion Sensor

Type	Passive Infrared (PIR) sensor with Fresnel lens. See Figure 2.
------	--

### CO<sub>2</sub> Sensor

Measurement Range	0 to 2000 ppm
Operating Elevation	0 to 16000 ft (0 to 4877 m)
Warm-up Time	< 2 minutes (operational), 10 minutes (maximum accuracy)
CO <sub>2</sub> Accuracy	400-1250 ppm ± 30 ppm or 3% of reading, whichever is greater <sup>1</sup> 1250-2000 ppm ±5% of reading + 30ppm <sup>1</sup>
Temperature Dependence	±0.11% FS per°F (0.2% FS per °C)
Stability	<2% of FS over life of sensor (15 years)
Pressure Dependence	0.135% of reading per mm Hg; software adjustable
Sensing Method	Non-dispersive infrared (NDIR) absorption Gold-plated optics
Calibration Method	Patented ABC Logic self-calibration algorithm

1. Tolerance based on span gas of ±2% and ABC Logic enabled.

### Mechanical

Dimensions with motion sensor (H×W×D)	4.62 × 3.29 × 1.15" (117.27 × 83.57 × 28.84 mm)
Dimensions without motion sensor (H×W×D)	4.62 × 3.29 × 1.06" (117.27 × 83.57 × 26.81 mm)
Shipping weight with motion sensor	0.20 kg (0.44lbs)
Shipping weight without motion sensor	0.18 kg (0.40lbs)
Enclosure Material	ABS
Enclosure Rating	Plastic housing, UL94-V1
Color	white
Installation	wall mounting through mounting holes (see Figure 1 for hole positions)

**Environmental**

Operating Temperature 32°F to 122°F (0°C to 50°C)  
 Storage Temperature -4°F to 122°F (-20°C to 50°C)  
 Relative Humidity 0 to 90% Non-condensing

**Standards and Regulations**

CE Emission EN 61000-6-3: 2007 + A1: ed.2011  
 CE Immunity EN 61000-6-1: 2007  
 FCC FCC rules part 15, subpart B class B

UL Listed (CDN & US) UL916 Energy management equipment

WEEE All products are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

RoHS All materials and manufacturing processes comply with the RoHS directive

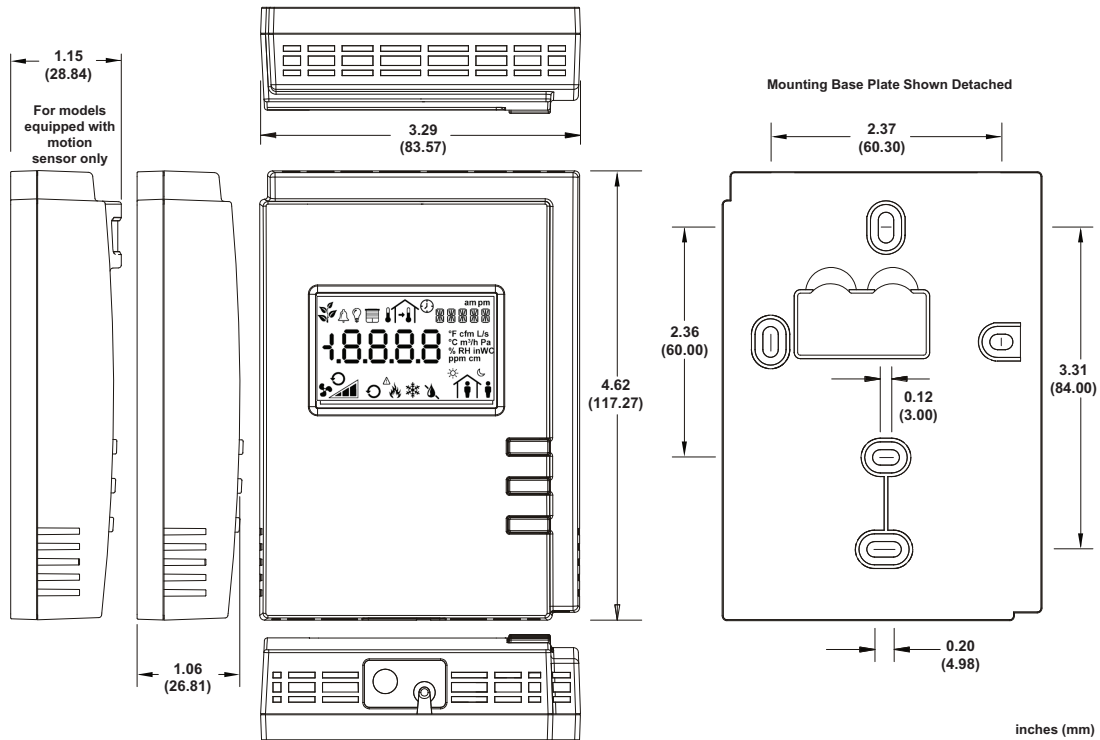


Figure 1: EC-Smart-Vue Dimensions

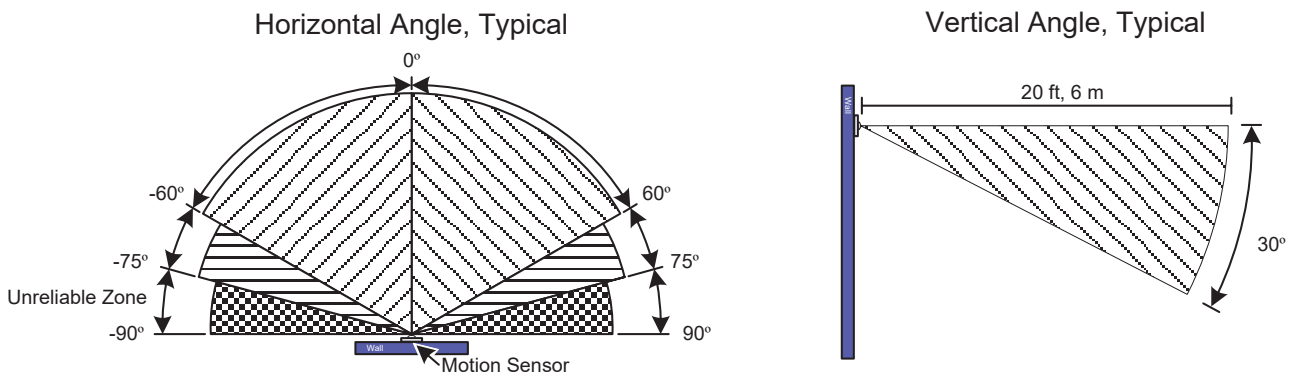


Figure 2: Motion Sensor

Specifications subject to change without notice.

ECLYPSE, Distech Controls, the Distech Controls logo, EC-Net, Allure, and Allure UNITOUCH are trademarks of Distech Controls Inc. BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2010 - 2019. All rights reserved.

Global Head Office - 4205 place de Java, Brossard, QC, Canada, J4Y 0C4 - EU Head Office - ZAC de Sacuny, 558 avenue Marcel Mérioux, 69530 Brignais, France