


Model Table

No.	Model	Output ●	Output ○ ● ●	Recommended controller
1	OPT-RID52	24V/2.5W	24V/5.2W	OPT-DPA1024E
2	OPT-RID70	24V/0.6W	24V/1.2W	OPT-DPA1024E
3	OPT-RID95	24V/6.0W	24V/7.0W	OPT-DPA1024E
4	OPT-RID100	24V/6.5W	24V/7.5W	OPT-DPA1024E
5	OPT-RID150	24V/6.3W	24V/11.3W	OPT-DPA1024E
6	OPT-RID180	24V/9.2W	24V/11W	OPT-DPA1024E
7	OPT-RID240	0.5A/12.0W	1.2A/28.8W	OPT-DPA6024
8	OPT-RID350	1.6A/38.4W	2.0A/48W	OPT-DPA6024

Dimensional Drawings [mm]

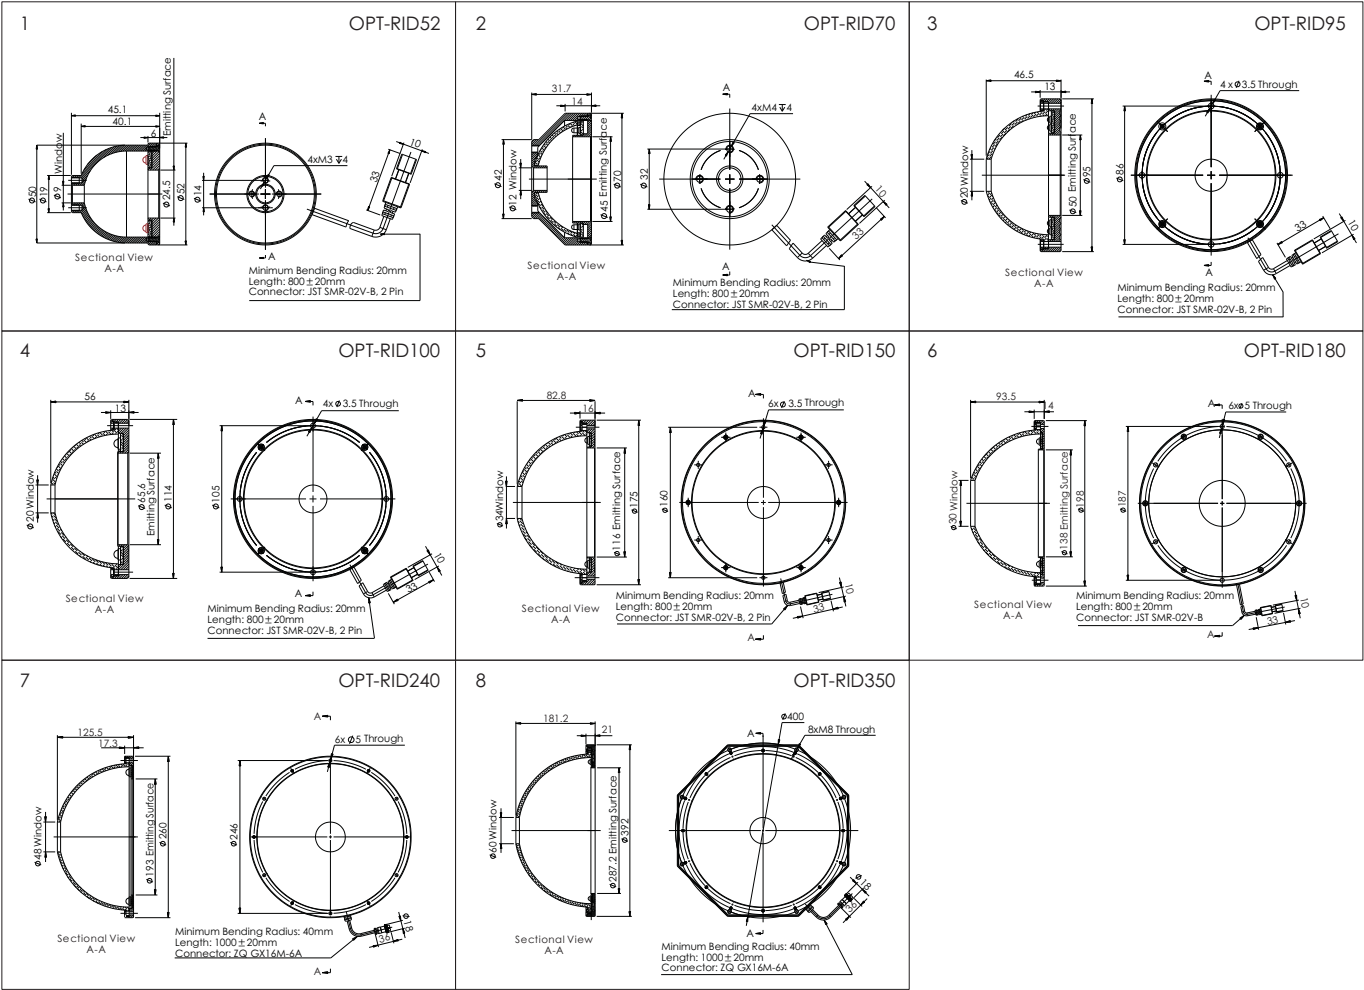





Product Features

- 1 Using special diffuser, providing uniform and shadowless lighting
- 2 Eliminating reflections shadows, ideal choice for glossy and curved surfaces

Application Areas

- ◆ Inspection of curved and uneven surfaces
- ◆ Inspection of highly reflective metal and glass surfaces

Selection Guide

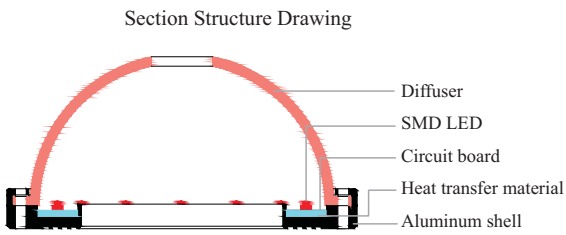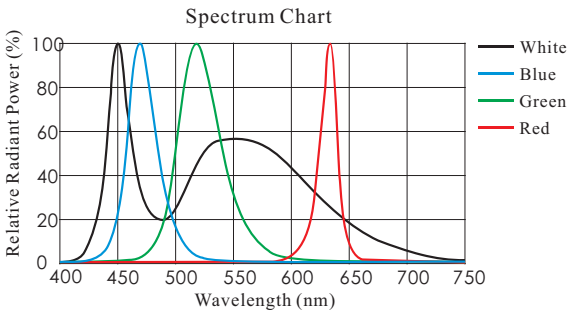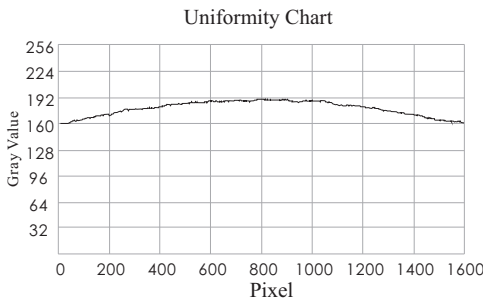

Customization Options

Color

Connector

Size

Emitting surface

Installation method

Light combination


Multi-color

Observation window



Application Example


Inspected item: Calculator buttons

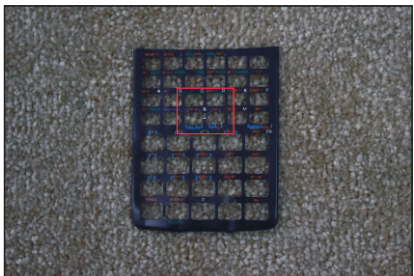

Original Image



Illuminated

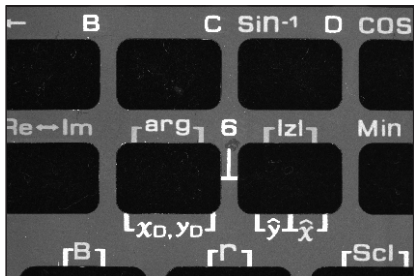

Result Image